

# LDP & LDD series

Filter element according to DIN 24550

---

Maximum working pressure up to 6 MPa (60 bar) - Flow rate up to 330 l/min

# FILTER SIZING

## INDEX

	Page
CALCULATION	23
CORRECTIVE FACTOR	24

**THE CORRECT FILTER SIZING HAVE TO BE BASED ON THE TOTAL PRESSURE DROP DEPENDING BY THE APPLICATION.**

FOR EXAMPLE, THE MAXIMUM TOTAL PRESSURE DROP ALLOWED BY A NEW AND CLEAN RETURN FILTER HAVE TO BE IN THE RANGE 0.4 ÷ 0.6 bar.

The pressure drop calculation is performed by adding together the value of the housing with the value of the filter element. The pressure drop  $\Delta pc$  of the housing is proportional to the fluid density ( $kg/dm^3$ ); all the graphs in the catalogue are referred to mineral oil with density of  $0.86 kg/dm^3$ .

The filter element pressure drop  $\Delta pe$  is proportional to its viscosity ( $mm^2/s$ ), the corrective factor Y have to be used in case of an oil viscosity different than  $30 mm^2/s$  (cSt).

**Sizing data for single filter element, head at top**

$\Delta pc$  = Filter housing pressure drop [bar]

$\Delta pe$  = Filter element pressure drop [bar]

Y = Corrective factor Y (see correspondent table), depending on the filter type, on the filter element size, on the filter element length and on the filter media

Q = flow rate (l/min)

V1 reference oil viscosity =  $30 mm^2/s$  (cSt)

V2 = operating oil viscosity in  $mm^2/s$  (cSt)

**Filter element pressure drop calculation with an oil viscosity different than  $30 mm^2/s$  (cSt)**

$\Delta pe = Y : 1000 \times Q \times (V2:V1)$

$\Delta p Tot. = \Delta pc + \Delta pe$

**Verification formula**

$\Delta p Tot. \leq \Delta p max allowed$

**Maximum total pressure drop ( $\Delta p max$ ) allowed by a new and clean filter**

Application	Range (bar)
Suction filters	0.08 ÷ 0.10
Return filters	0.4 ÷ 0.6
	0.4 ÷ 0.6 return lines
	0.3 ÷ 0.5 lubrication lines
Low & Medium Pressure filters	0.3 ÷ 0.4 off-line in power systems
	0.1 ÷ 0.3 off-line in test benches
	0.4 ÷ 0.6 over-boost
High Pressure filters	0.8 ÷ 1.5
Stainless Steel filters	0.8 ÷ 1.5

**Generic filter calculation example**

Application data:

Tank top return filter

Pressure Pmax = 10 bar

Flow rate Q = 120 l/min

Viscosity V2 =  $46 mm^2/s$  (cSt)


Oil density =  $0.86 kg/dm^3$

Required filtration efficiency =  $25 \mu m$  with absolute filtration

With bypass valve and G 1 1/4" inlet connection

Calculation:

$\Delta pc = 0.03 bar$  (see graphic below)

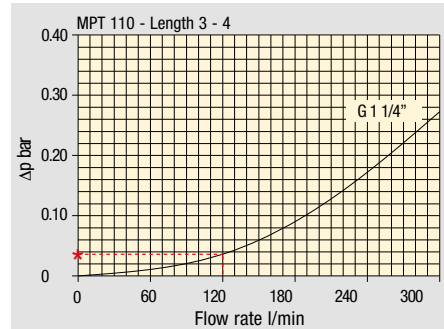

Filter housings  $\Delta p$  pressure drop. The curves are plotted using mineral oil with density of  $0.86 kg/dm^3$  in compliance with ISO 3968.  $\Delta p$  varies proportionally with density.

$\Delta pe = (2.00 : 1000) \times 120 \times (46 : 30) = 0.37 bar$

Filter element	Absolute filtration H Series					Nominal filtration N Series			
	A03	A06	A10	A16	A25	P10	P25	M25 M60 M90	
Type									
Return filters									
MF 020	2	74.00	50.08	20.00	16.00	9.00	6.43	5.51	4.40
	3	29.20	24.12	8.00	7.22	5.00	3.33	2.85	2.00
MF 030 MFX 030	1	22.00	19.00	6.56	5.33	4.33	1.68	1.44	1.30
	1	74.00	50.08	20.00	16.00	9.00	6.43	5.51	3.40
MF 100 MFX 100	1	28.20	24.40	8.67	8.17	6.88	4.62	3.96	1.25
	2	17.33	12.50	6.86	5.70	4.00	3.05	2.47	1.10
	3	10.25	9.00	3.65	3.33	2.50	1.63	1.32	0.96
	4	6.10	5.40	2.30	2.20	2.00	1.19	0.96	0.82

$\Delta p Tot. = 0.03 + 0.37 = 0.4 bar$

The selection is correct because the total pressure drop value is inside the admissible range for top tank return filters.

In case the allowed max total pressure drop is not verified, it is necessary to repeat the calculation changing the filter length/size.

# FILTER SIZING Corrective factor

Corrective factor Y to be used for the filter element pressure drop calculation. The values depend to the filter size and length and to the filter media.  
Reference oil viscosity 30 mm<sup>2</sup>/s

## Return filters

Filter element	Absolute filtration H Series					Nominal filtration N Series			
	Type	A03	A06	A10	A16	A25	P10	P25	M25 M60 M90
MF 020	1	74.00	50.08	20.00	16.00	9.00	6.43	5.51	4.40
	2	29.20	24.12	8.00	7.22	5.00	3.33	2.85	2.00
	3	22.00	19.00	6.56	5.33	4.33	1.68	1.44	1.30
MF 030 MFX 030	1	74.00	50.08	20.00	16.00	9.00	6.43	5.51	3.40
MF 100 MFX 100	1	28.20	24.40	8.67	8.17	6.88	4.62	3.96	1.25
	2	17.33	12.50	6.86	5.70	4.00	3.05	2.47	1.10
	3	10.25	9.00	3.65	3.33	2.50	1.63	1.32	0.96
	4	6.10	5.40	2.30	2.20	2.00	1.19	0.96	0.82
MF 180 MFX 180	1	3.67	3.05	1.64	1.56	1.24	1.18	1.06	0.26
	2	1.69	1.37	0.68	0.54	0.51	0.43	0.39	0.12
MF 190 MFX 190	2	1.69	1.37	0.60	0.49	0.44	0.35	0.31	0.11
MF 400 MFX 400	1	3.20	2.75	1.39	1.33	1.06	0.96	0.87	0.22
	2	2.00	1.87	0.88	0.85	0.55	0.49	0.45	0.13
	3	1.90	1.60	0.63	0.51	0.49	0.39	0.35	0.11
MF 750 MFX 750	1	1.08	0.84	0.49	0.36	0.26	0.21	0.19	0.06
MLX 250	2	3.00	3.04	1.46	1.25	1.17	-	-	M25 0.20
MLX 660	2	1.29	1.26	0.52	0.44	0.38	-	-	M25 0.10
CU 025		78.00	48.00	28.00	24.00	9.33	9.33	8.51	1.25
CU 040		25.88	20.88	10.44	10.00	3.78	3.78	3.30	1.25
CU 100		15.20	14.53	5.14	4.95	2.00	2.00	0.17	1.10
CU 250		3.25	2.55	1.55	1.35	0.71	0.71	0.59	0.25
CU 630		1.96	1.68	0.85	0.72	0.42	0.42	0.36	0.09
CU 850		1.06	0.84	0.42	0.33	0.17	0.17	0.13	0.04
MR 100	1	19.00	17.00	6.90	6.30	4.60	2.94	2.52	1.60
	2	11.70	10.80	4.40	4.30	3.00	2.94	2.52	1.37
	3	7.80	6.87	3.70	3.10	2.70	2.14	1.84	1.34
	4	5.50	4.97	2.60	2.40	2.18	1.72	1.47	1.34
	5	4.20	3.84	2.36	2.15	1.90	1.60	1.37	1.34
MR 250	1	5.35	4.85	2.32	1.92	1.50	1.38	1.20	0.15
	2	4.00	3.28	1.44	1.10	1.07	0.96	0.83	0.13
	3	2.60	2.20	1.08	1.00	0.86	0.77	0.64	0.12
	4	1.84	1.56	0.68	0.56	0.44	0.37	0.23	0.11
MR 630	1	3.10	2.48	1.32	1.14	0.92	0.83	0.73	0.09
	2	2.06	1.92	0.82	0.76	0.38	0.33	0.27	0.08
	3	1.48	1.30	0.60	0.56	0.26	0.22	0.17	0.08
	4	1.30	1.20	0.48	0.40	0.25	0.21	0.16	0.08
	5	0.74	0.65	0.30	0.28	0.13	0.10	0.08	0.04
MR 850	1	0.60	0.43	0.34	0.25	0.13	0.12	0.09	0.03
	2	0.37	0.26	0.23	0.21	0.11	0.08	0.07	0.03
	3	0.27	0.18	0.17	0.17	0.05	0.04	0.04	0.02
	4	0.23	0.16	0.13	0.12	0.04	0.03	0.03	0.02

## Return / Suction filters

Filter element	Absolute filtration								
	Type	A10	A16	A25					
RSX 116	1	5.12	4.33	3.85					
	2	2.22	1.87	1.22					
RSX 165	1	2.06	1.75	1.46					
	2	1.24	1.05	0.96					
	3	0.94	0.86	0.61					
Filter element	Absolute filtration N Series								
	Type	A03	A06	A10	A16	A25	P10	P25	M25 M60 M90
CU 110	1	16.25	15.16	8.75	8.14	5.87	2.86	2.65	0.14
	2	12.62	10.44	6.11	6.02	4.16	1.60	1.49	0.12
	3	8.57	7.95	5.07	4.07	2.40	1.24	1.15	0.11
	4	5.76	4.05	2.80	2.36	1.14	0.91	0.85	0.05

## Low & Medium pressure filters

Filter element	Absolute filtration N-W Series					Nominal filtration N Series			
	Type	A03	A06	A10	A16	A25	P10	P25	M25
CU 110	1	16.25	15.16	8.75	8.14	5.87	2.86	2.65	0.14
	2	12.62	10.44	6.11	6.02	4.15	1.60	1.49	0.12
	3	8.57	7.95	5.07	4.07	2.40	1.24	1.15	0.11
	4	5.76	4.05	2.80	2.36	1.14	0.91	0.85	0.05
CU 210	1	5.30	4.80	2.00	1.66	1.32	0.56	0.43	0.12
	2	3.44	2.95	1.24	1.09	0.70	0.42	0.35	0.09
	3	2.40	1.70	0.94	0.84	0.54	0.33	0.23	0.05
DN	016	7.95	7.20	3.00	2.49	1.98	0.84	0.65	0.18
	025	5.00	4.53	1.89	1.57	1.25	0.53	0.41	0.11
	040	3.13	2.66	1.12	0.98	0.63	0.38	0.32	0.08
CU 400	2	3.13	2.55	1.46	1.22	0.78	0.75	0.64	0.19
	3	2.15	1.70	0.94	0.78	0.50	0.40	0.34	0.10
	4	1.60	1.28	0.71	0.61	0.40	0.34	0.27	0.08
	5	1.00	0.83	0.47	0.34	0.20	0.24	0.19	0.06
	6	0.82	0.58	0.30	0.27	0.17	0.22	0.18	0.05
	CU 900	1	0.86	0.63	0.32	0.30	0.21	-	-
CU 950	2	1.03	0.80	0.59	0.40	0.26	-	-	0.05
	3	0.44	0.40	0.27	0.18	0.15	-	-	0.02
MR 630	7	0.88	0.78	0.36	0.34	0.16	0.12	0.96	0.47

**Corrective factor Y to be used for the filter element pressure drop calculation. The values depend to the filter size and length and to the filter media.**  
Reference oil viscosity 30 mm<sup>2</sup>/s

## High pressure filters

Filter element	Absolute filtration N - R Series					Nominal filtration N Series	
	Type	A03	A06	A10	A16	A25	M25
HP 011	1	332.71	250.07	184.32	152.36	128.36	-
	2	220.28	165.56	74.08	59.13	37.05	-
	3	123.24	92.68	41.48	33.08	20.72	-
	4	77.76	58.52	28.37	22.67	16.17	-
HP 039	2	70.66	53.20	25.77	20.57	14.67	4.90
	3	36.57	32.28	18.00	13.38	8.00	2.90
	4	26.57	23.27	12.46	8.80	5.58	2.20
HP 050	1	31.75	30.30	13.16	12.3	7.29	1.60
	2	24.25	21.26	11.70	9.09	4.90	1.40
	3	17.37	16.25	8.90	7.18	3.63	1.25
	4	12.12	10.75	6.10	5.75	3.08	1.07
	5	7.00	6.56	3.60	3.10	2.25	0.80
HP 065	1	58.50	43.46	23.16	19.66	10.71	1.28
	2	42.60	25.64	16.22	13.88	7.32	1.11
	3	20.50	15.88	8.18	6.81	3.91	0.58
HP 135	1	20.33	18.80	9.71	8.66	4.78	2.78
	2	11.14	10.16	6.60	6.38	2.22	1.11
	3	6.48	6.33	3.38	3.16	2.14	1.01
HP 150	1	17.53	15.91	7.48	6.96	5.94	1.07
	2	8.60	8.37	3.54	3.38	3.15	0.58
	3	6.53	5.90	2.93	2.79	2.12	0.49
HP 320	1	10.88	9.73	5.02	3.73	2.54	1.04
	2	4.40	3.83	1.75	1.48	0.88	0.71
	3	2.75	2.11	1.05	0.87	0.77	0.61
	4	2.12	1.77	0.98	0.78	0.55	0.47
HP 500	1	4.44	3.67	2.30	2.10	1.65	0.15
	2	3.37	2.77	1.78	1.68	1.24	0.10
	3	2.22	1.98	1.11	1.09	0.75	0.08
	4	1.81	1.33	0.93	0.86	0.68	0.05
	5	1.33	1.15	0.77	0.68	0.48	0.04

Filter element	Absolute filtration N Series					Nominal filtration N Series	
	Type	A03	A06	A10	A16	A25	M25
HF 320	1	3.65	2.95	2.80	1.80	0.90	0.38
	2	2.03	1.73	1.61	1.35	0.85	0.36
	3	1.84	1.42	1.32	1.22	0.80	0.35

## Suction filters

Filter element	Nominal filtration N Series	
	P10	P25
SF 250	65	21


## Stainless steel high pressure filters

Filter element	Absolute filtration N Series					
	Type	A03	A06	A10	A16	A25
HP 011	1	332.71	250.07	184.32	152.36	128.36
	2	220.28	165.56	74.08	59.13	37.05
	3	123.24	92.68	41.48	33.08	20.72
	4	77.76	58.52	28.37	22.67	16.17
HP 039	2	70.66	53.20	25.77	20.57	14.67
	3	36.57	32.28	18.00	13.38	8.00
	4	26.57	23.27	12.46	8.80	5.58
HP 050	1	31.75	30.30	13.16	12.3	7.29
	2	24.25	21.26	11.70	9.09	4.90
	3	17.37	16.25	8.90	7.18	3.63
	4	12.12	10.75	6.10	5.75	3.08
	5	7.00	6.56	3.60	3.10	2.25
HP 135	1	20.33	18.80	9.71	8.66	4.78
	2	11.14	10.16	6.60	6.38	2.22
	3	6.48	6.33	3.38	3.16	2.14


Filter element	Absolute filtration H - U Series					
	Type	A03	A06	A10	A16	A25
HP 011	1	424.58	319.74	235.17	194.44	163.78
	2	281.06	211.25	94.53	75.45	47.26
	3	130.14	97.50	43.63	34.82	21.81
	4	109.39	82.25	36.79	29.37	18.40
HP 039	2	70.66	53.20	25.77	20.57	14.67
	3	36.57	32.28	18.00	13.38	8.00
	4	26.57	23.27	12.46	8.80	5.58
HP 050	1	47.33	34.25	21.50	20.50	14.71
	2	29.10	25.95	14.04	10.90	5.88
	3	20.85	19.50	10.68	8.61	4.36
	4	14.55	12.90	7.32	6.90	3.69
	5	9.86	9.34	6.40	4.80	2.50
HP 135	1	29.16	25.33	13.00	12.47	5.92
	2	14.28	11.04	7.86	7.60	4.44
	3	8.96	7.46	4.89	4.16	3.07

# FILTER SIZING Selection Software


## Step 1 Select "FILTERS"

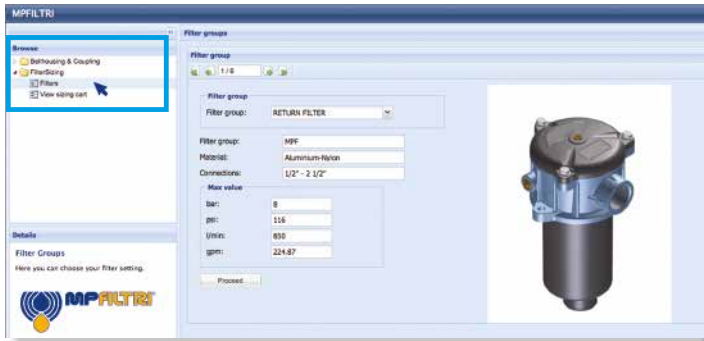


## Step 2 Choose filter group (Return Filter, Pressure Filter, etc.)

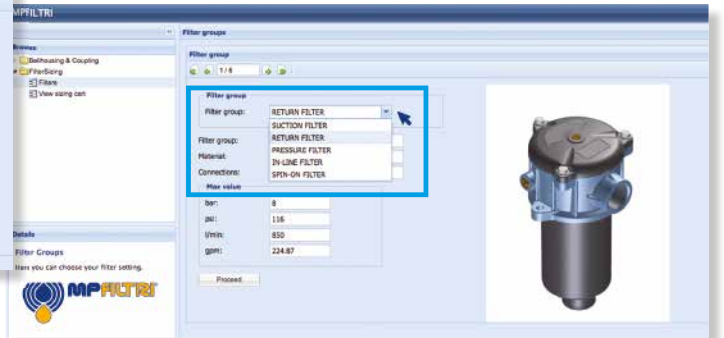

## Step 3 Choose filter type (MPF, MPT, etc.) in function of the max working pressure and the max flow rate

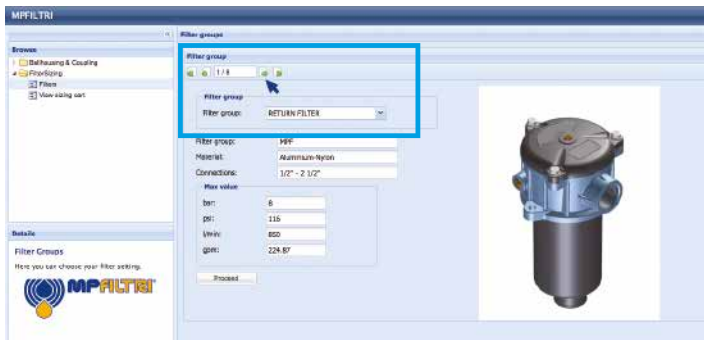

## Step 4 Push "PROCEED"

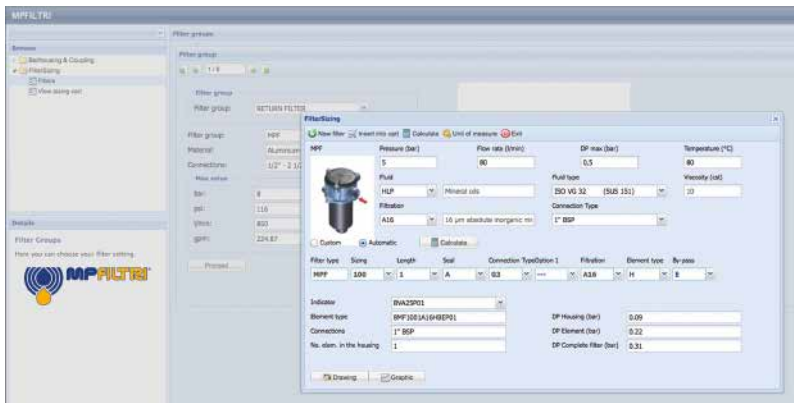


## Step 5

Insert all application data to calculate the filter size following the sequence:

- working pressure
- working flow rate
- working pressure drop
- working temperature
- fluid material and fluid type
- filtration media
- connection type

## Step 6

Push "CALCULATE" to have result; in case of any mistake, the system will advice which parameter is out of range to allow to modify/adjust the selection

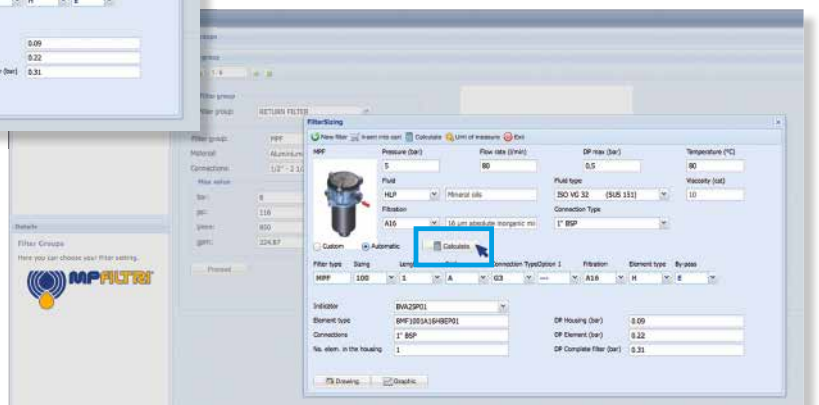

## Step 7

Download PDF  Datasheet "Report.aspx" pushing the button "Drawing"

# LDP & LDD series

Filter element according to DIN 24550

---

Maximum working pressure up to 6 MPa (60 bar) - Flow rate up to 330 l/min

# LDP & LDD GENERAL INFORMATION

## Filter element according to DIN 24550

### Descriptions

#### Low & Medium Pressure filters

**Maximum working pressure up to 6 MPa (60 bar)**  
**Flow rate up to 330 l/min**

**LDP** is a range of versatile low pressure filter for transmission, protection of sensitive components in low pressure hydraulic systems and filtration of the coolant into the machine tools.

They are also suitable for the off-line filtration of small reservoirs. They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/2", for a maximum return flow rate of 330 l/min
- Filter element designed in accordance with DIN 24550 regulation
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid
- Bypass valve, to relieve excessive pressure drop across the filter media
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

Delivery lines, in low pressure industrial equipment or mobile machines

**LDD** is a range of versatile low pressure duplex filter with integrated changeover function to allow the filter element replacement without the system shut-down.

They are directly connected to the lines of the system through the hydraulic fittings.

#### Available features:

- Female threaded connections up to 1 1/2" and flanged connections up to 1 1/2", for a maximum flow rate of 330 l/min
- Filter element designed in accordance with DIN 24550 regulation
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid
- Balancing valve integrated in the changeover lever, to equalize the housing pressure before the switch
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance work
- Optional sampling ports, to get samples of fluid or to connect additional instrument to the system
- Visual, electrical and electronic differential clogging indicators

#### Common applications:

- Systems where shut-down causes high costs
- Systems where shut-down causes safety issues

### Technical data

#### Filter housing materials

- Head: Aluminium
- Bowl: Cataphoretic Painted Steel
- Bypass valve: AISI 304 - Nylon

#### Pressure

- Test pressure: 9 MPa (90 bar)
- Burst pressure: 21 MPa (210 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 6 MPa (60 bar)

#### Bypass valve

- Opening pressure 350 kPa (3.5 bar)  $\pm$ 10%
- Other opening pressures on request.

#### $\Delta p$ element type

- Microfibre filter elements - series N: 20 bar
- Fluid flow through the filter element from OUT to IN

#### Seals

- Standard NBR series A
- Optional FPM series V

#### Temperature

From -25° C to +110° C

#### Connections

Inlet/Outlet In-Line

#### Note

LDP - LDD filters are provided for vertical mounting



### Weights [kg] and volumes [dm<sup>3</sup>]




Filter series	Weights [kg]	Volumes [dm <sup>3</sup> ]
<b>LDP 016</b>	2.0	1.2
<b>LDP 025</b>	3.0	1.6
<b>LDP 040</b>	5.0	2.2
<b>LDD 016</b>	9.3	3.6
<b>LDD 025</b>	9.5	4.1
<b>LDD 040</b>	11.3	4.8



# GENERAL INFORMATION LDP & LDD

Filter element according to DIN 24550

Pressure drop  
Filter housings  $\Delta p$  pressure drop

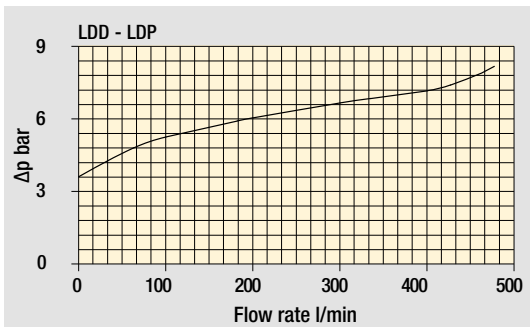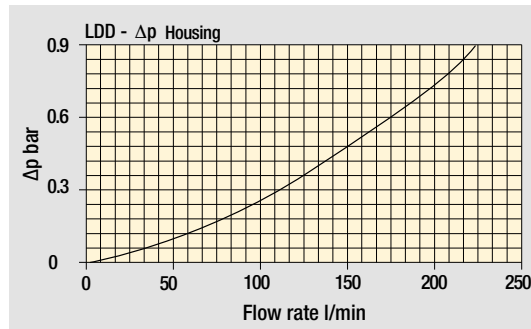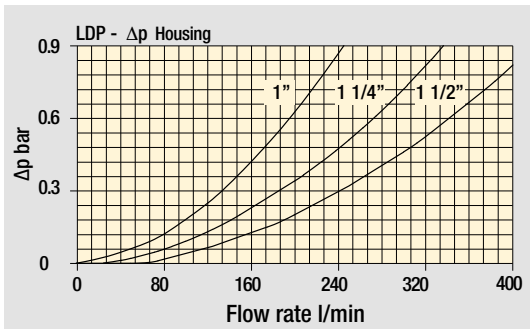

Bypass valve pressure drop

The curves are plotted using mineral oil with density of  $0.86 \text{ kg/dm}^3$  in compliance with ISO 3968.  
 $\Delta p$  varies proportionally with density.

Flow rates [l/min]

Filter series	Filter element design - N Series										
	A03	A06	A10	A16	A25	M25	M60	M90	M250	P10	P25
<b>LDP 016</b>	83	91	178	198	222	350	353	358	359	295	309
<b>LDP 025</b>	124	134	227	245	265	357	358	358	359	319	330
<b>LDP 040</b>	173	191	274	284	311	359	360	361	362	332	337
<b>LDD 016</b>	68	73	120	130	140	189	190	192	192	169	174
<b>LDD 025</b>	93	98	142	149	157	191	192	192	192	178	181
<b>LDD 040</b>	118	126	161	165	175	192	192	193	193	182	184

**Maximum flow rate for a complete low and medium pressure filter with a pressure drop  $\Delta p = 0.7 \text{ bar}$ .**

The reference fluid has a kinematic viscosity of  $30 \text{ mm}^2/\text{s}$  (cSt) and a density of  $0.86 \text{ kg/dm}^3$ .

For different pressure drop or fluid viscosity we recommend to use our selection software available on [www.mpfiltri.com](http://www.mpfiltri.com).

Please, contact our Sales Department for further additional information.

Hydraulic symbols

Filter series	Execution S	Execution B	Execution S	Execution B
<b>LDP 016</b>	•	•		
<b>LDP 025</b>	•	•		
<b>LDP 040</b>	•	•		
<b>LDD 016</b>			•	•
<b>LDD 025</b>			•	•
<b>LDD 040</b>			•	•

# LDP Filter element according to DIN 24550

## Designation & Ordering code

### COMPLETE FILTER


<b>Series</b>	Configuration example: <b>LDP</b> <b>025</b> <b>B</b> <b>A</b> <b>D</b> <b>6</b> <b>A10</b> <b>N</b> <b>P01</b>										
<b>LDP</b>											
<b>Size</b>											
<b>016</b>	Element according to DIN 24550 - T3 DN160										
<b>025</b>	Element according to DIN 24550 - T3 DN250										
<b>040</b>	Element according to DIN 24550 - T3 DN400										
<b>Bypass valve</b>											
<b>S</b>	Without bypass					<b>B</b>	3.5 bar				
<b>Seals and treatments</b>				Filtration rating							
<b>A</b>	NBR			<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>					
<b>V</b>	FPM			•	•	•					
<b>W</b>	NBR compatible with fluids HFA-HFB-HFC			•	•						
<b>Connections</b>											
<b>A</b>	G 1"					<b>F</b>	1 1/2" NPT				
<b>B</b>	G 1 1/4"					<b>G</b>	SAE 16 - 1 5/16" - 12 UN				
<b>C</b>	G 1 1/2"					<b>H</b>	SAE 20 - 1 5/8" - 12 UN				
<b>D</b>	1" NPT					<b>I</b>	SAE 24 - 1 7/8" - 12 UN				
<b>E</b>	1 1/4" NPT										
<b>Connection for differential indicator</b>											
<b>6</b>	With plugged connection										
<b>Filtration rating (filter media)</b>											
<b>A03</b>	Inorganic microfiber 3 µm					<b>M25</b>	Wire mesh 25 µm				
<b>A06</b>	Inorganic microfiber 6 µm					<b>M60</b>	Wire mesh 60 µm				
<b>A10</b>	Inorganic microfiber 10 µm					<b>M90</b>	Wire mesh 90 µm				
<b>A16</b>	Inorganic microfiber 16 µm					<b>P10</b>	Resin impregnated paper 10 µm				
<b>A25</b>	Inorganic microfiber 25 µm					<b>P25</b>	Resin impregnated paper 25 µm				
<b>WA025</b>	Water absorber inorganic microfiber 25 µm										
<b>Element Δp</b>	<b>N</b>					20 bar					
<b>Execution</b>	<b>P01</b>					MP Filtri standard					
<b>Pxx</b>	Customized										

### FILTER ELEMENT

<b>Element series</b>	Configuration example: <b>DN</b> <b>025</b> <b>A10</b> <b>A</b> <b>N</b> <b>P01</b>										
<b>DN</b>											
<b>Element size</b>											
<b>016</b>	Element according to DIN 24550 - T3 DN160										
<b>025</b>	Element according to DIN 24550 - T3 DN250										
<b>040</b>	Element according to DIN 24550 - T3 DN400										
<b>Filtration rating (filter media)</b>											
<b>A03</b>	Inorganic microfiber 3 µm					<b>M25</b>	Wire mesh 25 µm				
<b>A06</b>	Inorganic microfiber 6 µm					<b>M60</b>	Wire mesh 60 µm				
<b>A10</b>	Inorganic microfiber 10 µm					<b>M90</b>	Wire mesh 90 µm				
<b>A16</b>	Inorganic microfiber 16 µm					<b>P10</b>	Resin impregnated paper 10 µm				
<b>A25</b>	Inorganic microfiber 25 µm					<b>P25</b>	Resin impregnated paper 25 µm				
<b>WA025</b>	Water absorber inorganic microfiber 25 µm										
<b>Seals</b>				Filtration rating							
<b>A</b>	NBR			<b>Axx</b>	<b>Mxx</b>	<b>Pxx</b>					
<b>V</b>	FPM			•	•	•					
<b>W</b>	NBR compatible with fluids HFA-HFB-HFC			•	•						
<b>Element Δp</b>	<b>N</b>					20 bar					
<b>Execution</b>	<b>P01</b>					MP Filtri standard					
<b>Pxx</b>	Customized										

### ACCESSORIES

<b>Differential indicators</b>	page		page
<b>DEA</b>	Electrical differential indicator	445	<b>DTA</b> Electronic differential indicator 448
<b>DEM</b>	Electrical differential indicator	445-446	<b>DVA</b> Visual differential indicator 448
<b>DLA</b>	Electrical / visual differential indicator	446-447	<b>DVM</b> Visual differential indicator 448
<b>DLE</b>	Electrical / visual differential indicator	447	
<b>Additional features</b>	page		
<b>T2</b>	Plug	449	

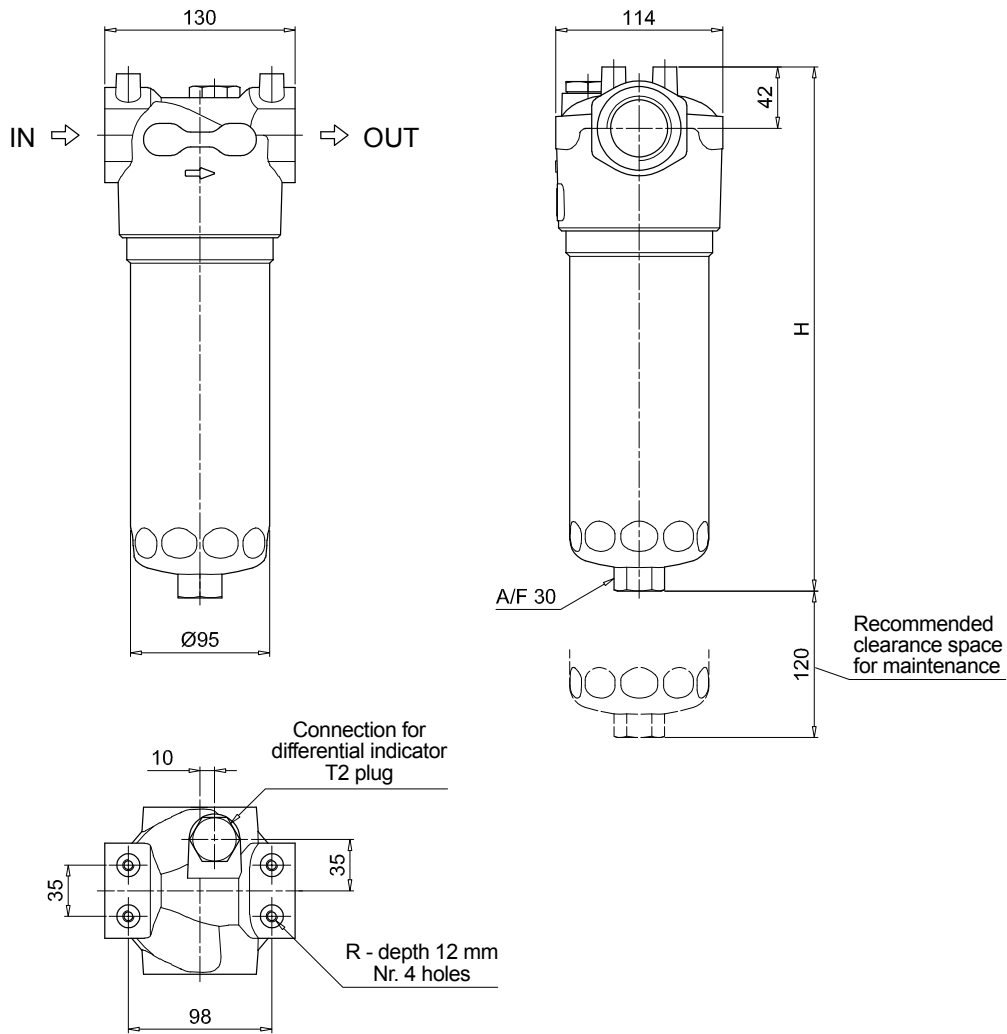

LDP	
Filter size	H [mm]
<b>016</b>	268
<b>025</b>	358
<b>040</b>	508
Connections	R
<b>A-B-C</b>	M8
<b>D-E-F-G-H-I</b>	5/16" UNC

# LDD Filter element according to DIN 24550

## Designation & Ordering code

### COMPLETE FILTER

<b>Series</b>	Configuration example: <b>LDD</b> <b>025</b> <b>B</b> <b>A</b> <b>C</b> <b>6</b> <b>A10</b> <b>N</b> <b>P01</b>										
<b>LDD</b>											
<b>Size</b>											
<b>016</b>	Element according to DIN 24550 - T3 DN160										
<b>025</b>	Element according to DIN 24550 - T3 DN250										
<b>040</b>	Element according to DIN 24550 - T3 DN400										
<b>Bypass valve</b>											
<b>S</b>	Without bypass			<b>B</b>	3.5 bar						
<b>Seals and treatments</b>				Filtration rating							
<b>A</b>	NBR			Axx	Mxx	Pxx					
<b>V</b>	FPM										
<b>W</b>	NBR compatible with fluids HFA-HFB-HFC										
<b>Connections</b>											
<b>C</b>	G 1 1/2"										
<b>F</b>	1 1/2" NPT										
<b>I</b>	SAE 24 - 1 7/8" - 12 UN										
<b>L</b>	1 1/2" SAE 3000 psi/M + G 1 1/4"										
<b>M</b>	1 1/2" SAE 3000 psi/UNC + 1 1/4" NPT										
<b>N</b>	1 1/2" SAE 3000 psi/UNC + SAE 20 - 1 5/8" UN										
<b>Connection for differential indicator</b>											
<b>6</b>	With plugged connection										
<b>Filtration rating (filter media)</b>											
<b>A03</b>	Inorganic microfiber 3 µm			<b>M25</b>	Wire mesh 25 µm						
<b>A06</b>	Inorganic microfiber 6 µm			<b>M60</b>	Wire mesh 60 µm						
<b>A10</b>	Inorganic microfiber 10 µm			<b>M90</b>	Wire mesh 90 µm						
<b>A16</b>	Inorganic microfiber 16 µm			<b>P10</b>	Resin impregnated paper 10 µm						
<b>A25</b>	Inorganic microfiber 25 µm			<b>P25</b>	Resin impregnated paper 25 µm						
<b>WA025</b>	Water absorber inorganic microfiber 25 µm										
<b>Element Δp</b>				<b>N</b>	20 bar						
<b>Execution</b>				<b>P01</b>	MP Filtri standard						
				<b>Pxx</b>	Customized						


### FILTER ELEMENT

<b>Element series</b>	Configuration example: <b>DN</b> <b>025</b> <b>A10</b> <b>A</b> <b>N</b> <b>P01</b>									
<b>DN</b>										
<b>Element size</b>										
<b>016</b>	Element according to DIN 24550 - T3 DN160									
<b>025</b>	Element according to DIN 24550 - T3 DN250									
<b>040</b>	Element according to DIN 24550 - T3 DN400									
<b>Filtration rating (filter media)</b>										
<b>A03</b>	Inorganic microfiber 3 µm			<b>M25</b>	Wire mesh 25 µm					
<b>A06</b>	Inorganic microfiber 6 µm			<b>M60</b>	Wire mesh 60 µm					
<b>A10</b>	Inorganic microfiber 10 µm			<b>M90</b>	Wire mesh 90 µm					
<b>A16</b>	Inorganic microfiber 16 µm			<b>P10</b>	Resin impregnated paper 10 µm					
<b>A25</b>	Inorganic microfiber 25 µm			<b>P25</b>	Resin impregnated paper 25 µm					
<b>WA025</b>	Water absorber inorganic microfiber 25 µm									
<b>Seals</b>				Filtration rating						
<b>A</b>	NBR			Axx	Mxx	Pxx				
<b>V</b>	FPM									
<b>W</b>	NBR compatible with fluids HFA-HFB-HFC									
<b>Element Δp</b>				<b>N</b>	20 bar					
<b>Execution</b>				<b>P01</b>	MP Filtri standard					
				<b>Pxx</b>	Customized					

### ACCESSORIES


<b>Differential indicators</b>	page				page
<b>DEA</b>	Electrical differential indicator	445		<b>DTA</b>	Electronic differential indicator 448
<b>DEM</b>	Electrical differential indicator	445-446		<b>DVA</b>	Visual differential indicator 448
<b>DLA</b>	Electrical / visual differential indicator	446-447		<b>DVM</b>	Visual differential indicator 448
<b>DLE</b>	Electrical / visual differential indicator	447			
<b>Additional features</b>	page				
<b>T2</b>	Plug	449			

LDD	
Filter size	H [mm]
<b>016</b>	293
<b>025</b>	383
<b>040</b>	533
Connections	R
<b>C</b>	M10
<b>F - I</b>	3/8" UNC
<b>L</b>	M10
<b>M - N</b>	3/8" UNC

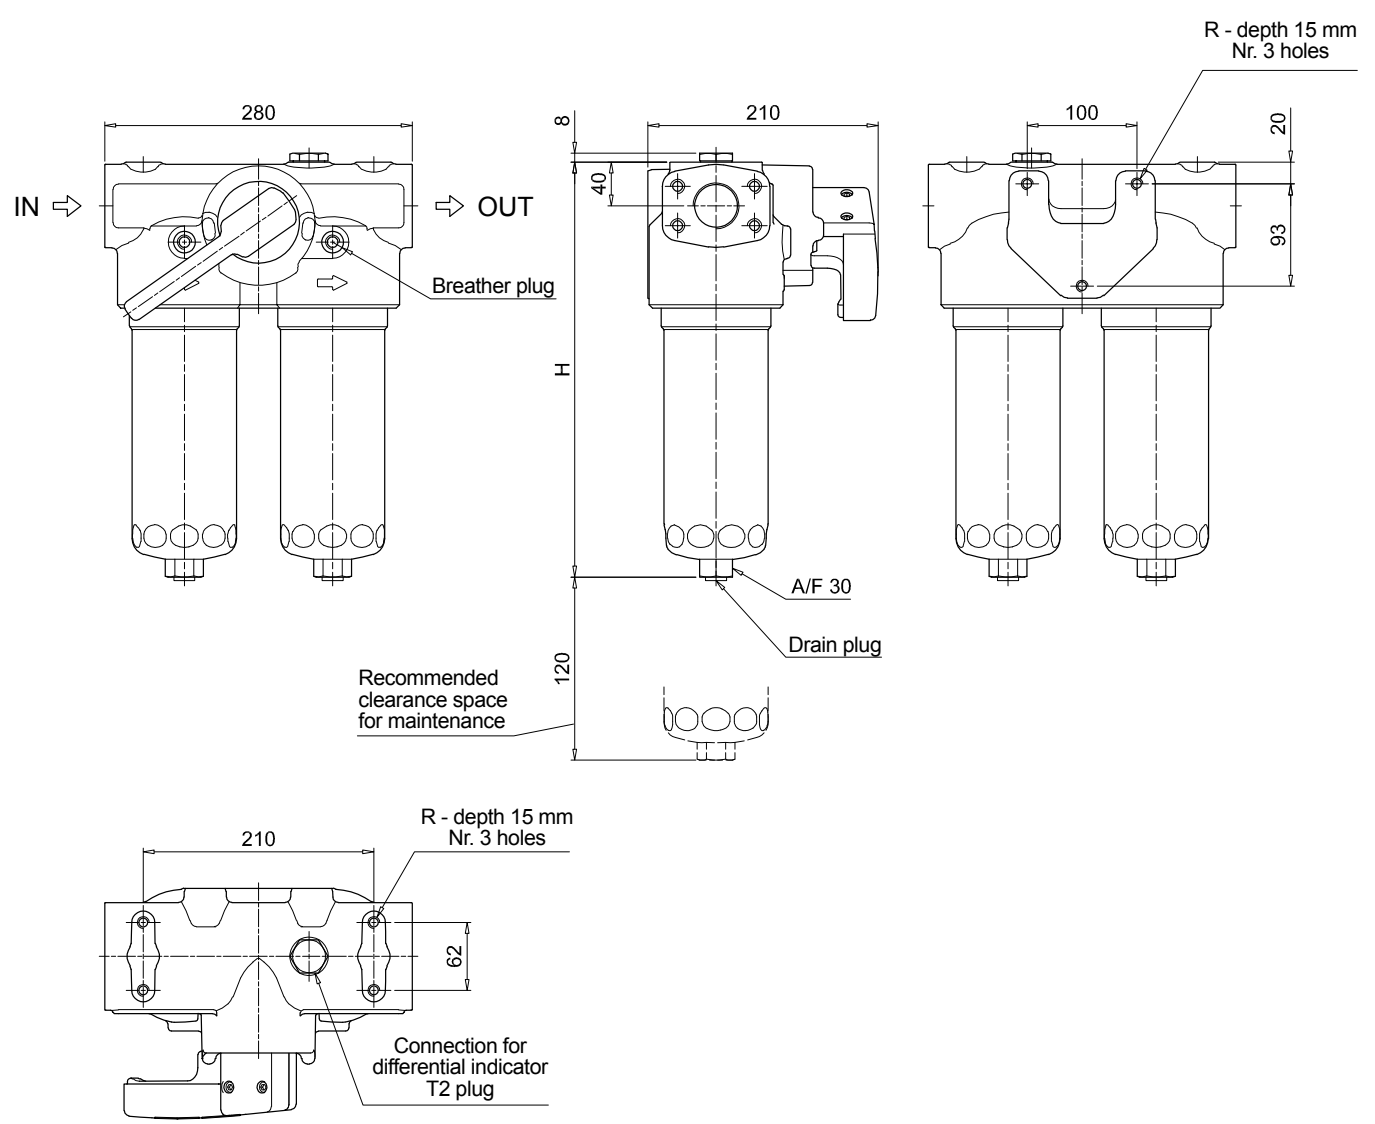


Order number for spare parts

LDP

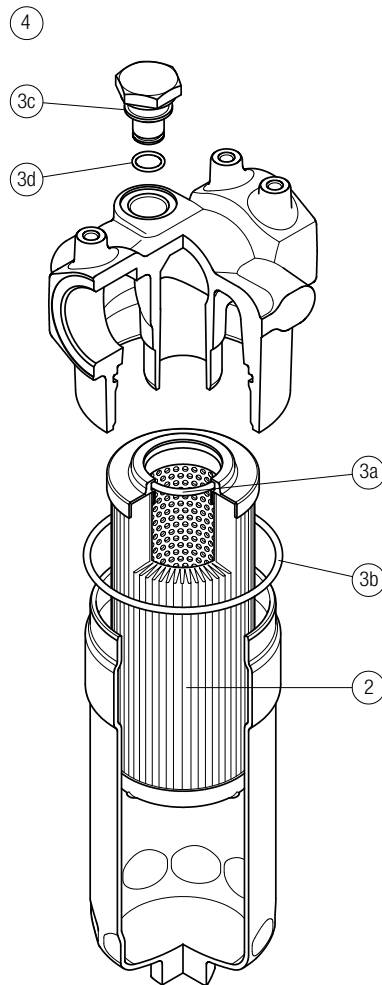

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.		Q.ty: 1 pc.	
Filter series	Filter element	Seal Kit code number		Indicator connection plug	
LDP	See order table	NBR	FPM	NBR	FPM
	<b>2</b>	<b>3</b> (3a ÷ 3d)		<b>4</b>	
		02050435	02050436	T2H	T2V

Order number for spare parts

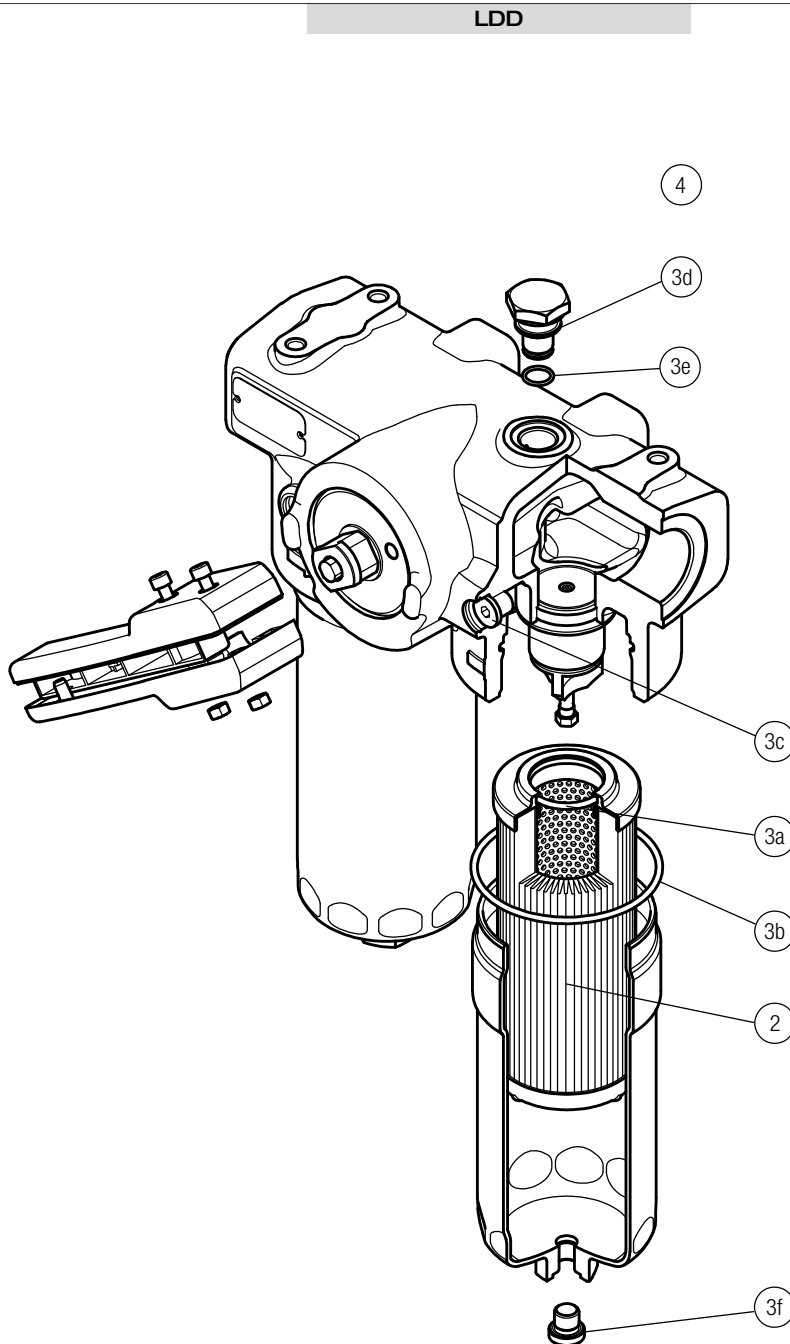

Item:	Q.ty: 1 pc.	Q.ty: 1 pc.		Q.ty: 2 pc.	
Filter series	Filter element	Seal Kit code number		Indicator connection plug	
LDD	See order table	NBR	FPM	NBR	FPM
	<b>2</b>	<b>3</b> (3a ÷ 3i)		<b>4</b>	
		02050671	02050672	T2H	T2V