

Series LEG




LEG (Materials)

- Flange: Aluminium
- Tube: Brass
- Float: Nylon foam
- O-Ring: NBR
- Circlip: Phosphor bronze
- Contact: N.C. reed (N.O. on request)
- Protection rating: IP65
- Max switching capacity: 80 W
- Max switching current: 1 A
- Max switching voltage: 250 Vac
- Fluid specific gravity: > 0.75

Weight

180 gr (for L= 103 mm)

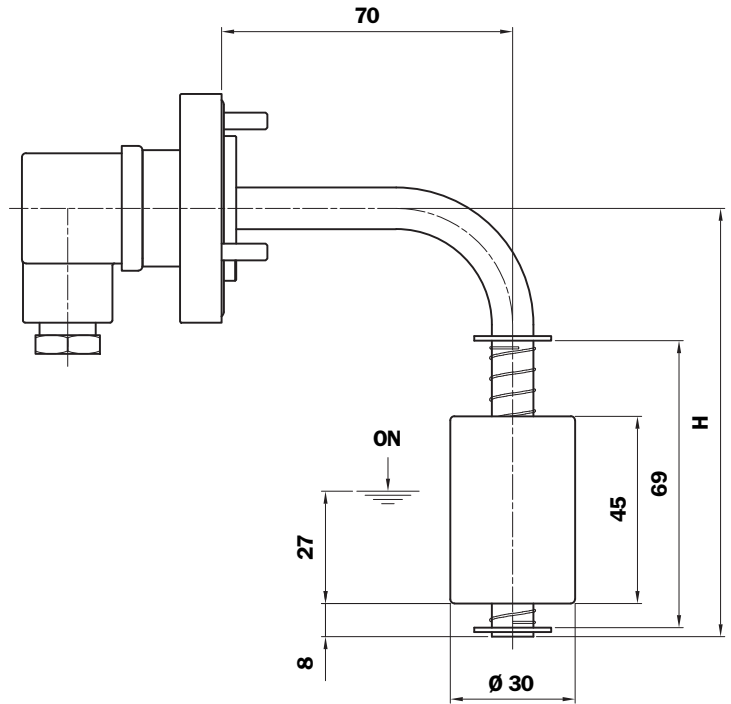

Length	H mm
102	102
200	200

LEG 1 Float



To invert the contact status from N.O. to N.C. and vice versa, simply invert the float.

Ordering information LEG

Electrical level indicator

LEG

Example: LEG

1	2	3	4	5	6	7	8	9
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
A	200	1	A	1	A	F	S	P01

1 - Tube material

A Brass

2 - Length

102
 200

3 - Number of float

1 Nr. 1 float

4 - Float material

A Nylon foam

5 - Contact

1 N.C.

6 - Seal

A NBR

7 - Type of fixing

F 3 holes flange

8 - Electrical connection

S DIN 43650 connector

9 - Option

P01 MP Filtri standard
 Pxx On request

Note: Versions in stainless steel or different lengths from those indicated are available.

For customization features other than those indicated on this page, contact the Technical and Sales Department