


Accessories

DIFFUSER WITH FAST LOCK CONNECTION

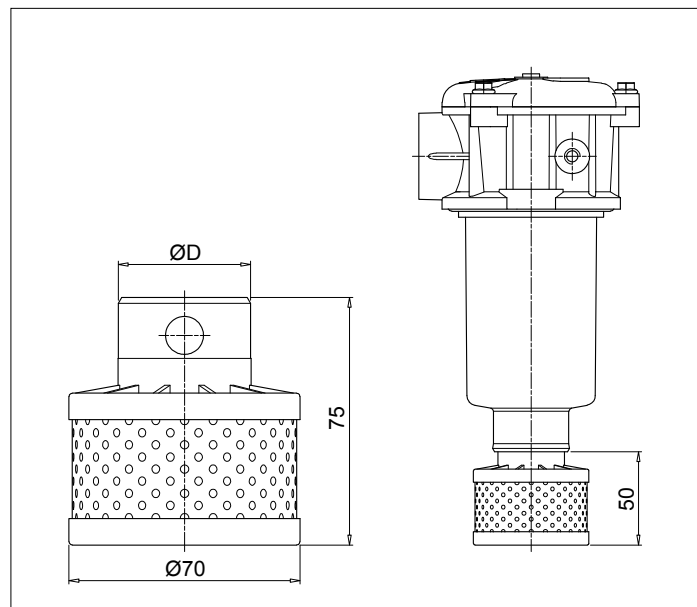


Configuration example: **DFS** **32** **A** **075**

Series	Size	Ø D [mm]	Version	Length
DFS	32	32	A Standard	075 Standard
	40	40		

Filter series	Filter size	Filter Length	DFS32	DFS40		
MPF	100	104	110	1	•	
		2	•	-		
		3	-	•		
		4	-	•		
MPFX	100	104	110	1	•	
		2	•	-		
		3	-	•		
		4	-	•		
MPT	110	114	116	120	1	•
		2	•	-		
		3	-	•		
		4	-	•		
MPTX	110	114	116	120	1	•
		2	•	-		
		3	-	•		
		4	-	•		

DIPSTICK

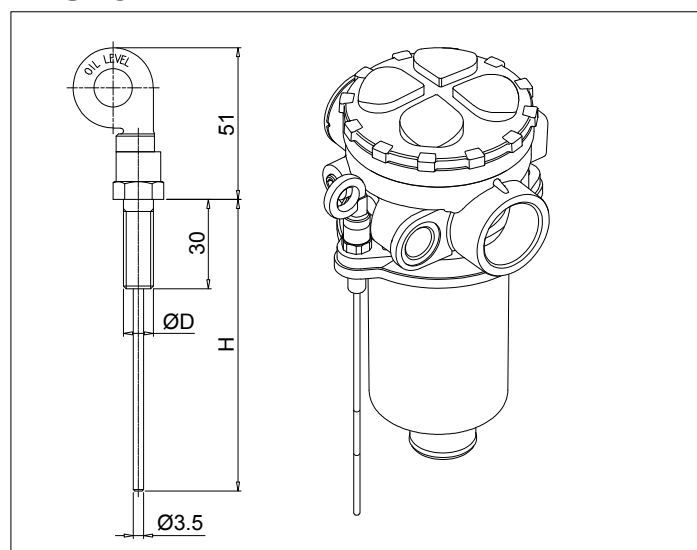

Materials

- Screw: phosphatized steel
- Stick: phosphatized steel
- Handle: Polyamide

Technical data

Working temperature: from -25 °C to +110 °C

Configuration example: **DPT** **20** **M10** **A** **P01**

Series	Length	H [mm]
DPT	15	134
	20	184
	25	234
	30	284
	35	334

Seals

A	NBR
V	FPM


Fastening

M8	Fastening with screws Ø D = M8
M10	Fastening with screws Ø D = M10

Execution

P01	MP Filtri standard
Pxx	Customized

FILLER PLUG

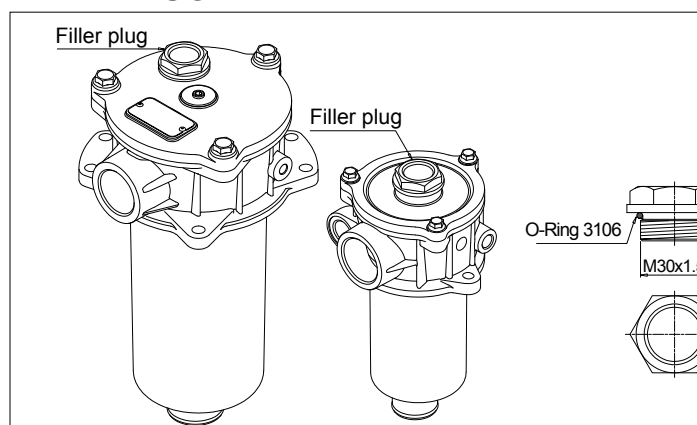

Materials

- Body: Polyamide
- Seal: NBR

Technical data

Tightening torque: 15 N·m

O-Ring 3106

M30x1.5

A/F 34

For any further information, please, contact our commercial dept.

POLYAMIDE EXTENSION TUBE

H1 - Total
length
immersed
in the tank

Conf. example: **TE** **40** **A** **250**

Series	
TE	
Size	Ø D [mm]
25	25
32	32
40	40
51	51
62	62

Material
A Polyamide

Length	H [mm]	25-32-40	51-62
200	200	•	•
250	250	•	-
300	300	•	•
350	350	•	-
400	400	•	•
450	450	•	-
500	500	•	•
600	600	-	•

COMPATIBILITY TABLE																	
Filter series	Filter size			Filter length	TE25	TE32	TE40	TE51	TE62	Tube length							
										200	250	300	350	400	450	500	600
											H1 [mm]						
MPF MPFX	30			1	•	-	-	-	-	266	316	366	416	466	516	566	-
MPF	100	104	110	1	-	•	-	-	-	275	325	375	425	475	525	575	-
				2	-	•	-	-	-	322	372	422	472	522	572	622	-
				3	-	-	•	-	-	400	450	500	550	600	650	700	-
				4	-	-	•	-	-	502	552	602	652	702	752	802	-
MPFX	100	104	110	1	-	-	•	-	-	277	327	377	427	477	527	577	-
				2	-	-	•	-	-	322	372	422	472	522	572	622	-
				3	-	-	•	-	-	400	450	500	550	600	650	700	-
				4	-	-	•	-	-	502	552	602	652	702	752	802	-
MPF MPFX	181	182	184	1	-	-	•	-	-	410	460	510	560	610	660	710	-
				2	-	-	•	-	-	623	673	723	773	823	873	923	-
MPFX	191	192	194	2	-	-	-	•	-	620	-	720	-	820	-	920	1020
				1	-	-	-	•	-	352	-	452	-	552	-	652	752
	400	410	450	2	-	-	-	-	•	411	-	511	-	611	-	711	811
				3	-	-	-	-	•	459	-	559	-	659	-	759	859
MPT MPTX	750			1	-	-	-	-	•	597	-	697	-	797	-	897	997
	025	027		1	•	-	-	-	-	278	328	378	428	478	528	578	-
				2	•	-	-	-	-	342	392	442	492	542	592	642	-
				3	•	-	-	-	-	380	430	480	530	580	630	680	-
MPT	110	114	116	120	1	-	•	-	-	273	323	373	423	473	523	573	-
					2	-	•	-	-	320	370	420	470	520	570	620	-
					3	-	-	•	-	396	446	496	546	596	646	696	-
					4	-	-	•	-	498	548	598	648	698	748	798	-
MPTX	110	114	116	120	1	-	-	•	-	273	323	373	423	473	523	573	-
					2	-	-	•	-	318	368	418	468	518	568	618	-
					3	-	-	•	-	396	446	496	546	596	646	696	-
					4	-	-	•	-	498	548	598	648	698	748	798	-

STEEL EXTENSION TUBE

Configuration example:

MPF191

2

A

F1

A10

H

B

S60

Length	H1 [mm]
S30	300
S35	350
S40	400
S45	450
S50	500
S60	600
S70	700
S80	800
S90	900

COMPATIBILITY TABLE						
					Ø D [mm]	
Filter series	Filter size				Filter length	
MPF	191	192	194		2	• -
					1	• -
	400	410	450	451	2	- •
					3	- •
		750			1	- •