AGRICULTURE & FORESTRY



HIGH-PERFORMANCE FILTRATION AND CONTAMINATION MONITORING SOLUTIONS FOR THE AGRICULTURAL SECTOR

Designed to thrive in the most challenging working conditions, MP Filtri's comprehensive range of products delivers the best in reliability and quality and has proven itself in the agricultural sector for 60 years.

Enhancing efficiency

Reduced waste

MP Filtri has always forged close partnerships with customers thanks to its commitment to meeting their needs and delivering effective solutions. The company offers a wide range of high-performance products including:



High Pressure Filters



Low Pressure Filters



Return Filters



High Pressure Filters



Return Filters



Elixir® Filters



RELIABILITY AND QUALITY: WHY MP FILTRI IS THE PERFECT PARTNER!

State-of-the-art research and development programmes ensure our products are extensively tested and perfected in a cutting-edge laboratory. A passion for innovations drives everything we do.

Technology and experience are in the company's DNA!

THE MAIN FEATURES THAT DISTINGUISH OUR PRODUCTS ARE:

- Full control over every element of production from design to delivery
- A wide range of precise customisation options
- The latest in Research and Development technology
- Innovative design
- Outstanding support in the field
- Fast, reliable delivery times

MAIN **PRODUCTS**



GUARANTEED PERFORMANCE

MULTI-PASS ISO 16889

The ISO Multipass test evaluates the characteristics (or performance) of a filter element, providing data on efficiency and capacity.

ISO standard filtration compared		
$\beta_{x(c)} > 1000$	Filter media code	
ISO 16889	MP Filtri	
5 μm _(c)	A(00)03	
7 μm _(c)	A(00)06	
10 μm _(c)	A(00)10	
16 μm _(c)	A(00)16	
21 μm _(c)	A(00)25	

$$\frac{\text{Upstream}}{\text{particles number} > X \ \mu m_{(c)}} = \beta_{x(c)}$$

$$\frac{\text{Downstream}}{\text{particles number} > X \ \mu m_{(c)}}$$


Designed to thrive in even the most challenging working conditions

Full control over production from design to delivery




STABILITY OF BETA RATING

DEGREE OF FILTRATION A(00)10, β 10 μ m_(c) >1000

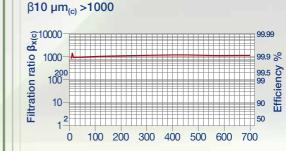

Differential pressure (kPa)

HIGH EFFICIENCY IN ALL CONDITIONS

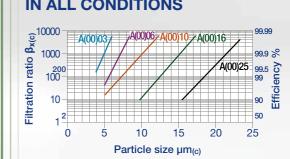

HYDRAULIC FILTRATION

Designing an effective filtration system requires a precise evaluation of its specific features, including: sensitivity of the individual components, degree and type of contamination, circuit pressure,

flow rate, environmental conditions, fluid used and intervention cycles with a guarantee of a longer life of the machines than expected.

SUCTION FILTERS

OTRO	up to	Q max
STRC Submerged suction filter,	l/min	gpm
with bypass	875	231



RETURN FILTERS

MDH "Bubble-free" deaeration filter allows the reduction of air inflow into the tank

up to	P _{max}	up to Q _{max}	
bar	psi	l/min	gpm
8	116	750	198
10	145	500	132



with air breather, easy filter element servicing

ELIXIR® guarantees easy maintenance by replacing only the filter element FEX with a lower environmental impact than previous models

up to P _{max}		up to Q _{max}	
bar	psi	l/min	gpm
16	232	300	79







RETURN / SUCTION FILTERS

MRSX

up to P_{max} up to Q_{max} Tank top filter with combined filtration bar psi gpm on return and suction to the inlet at the hydrostatic 10 145 79 transmissions 300 in closed loop

HIGH PRESSURE FILTERS



FMM In-line high pressure filter with compact dimensions and reduced weight

up to P _{max}		up to Q _{ma}		
bar	psi	l/min	gpm	
420	6092	300	79	
420	6092	710	198	

FHP High pressure filter with outlet check valve or reverse flow valve options





LOW PRESSURE FILTERS

LMP

Durable In-line filter with a wide range of element media options, including water removal

up to P_{max}		up to Q _{max}		
bar	psi	l/min	gpm	
60	870	365	96	

FILTER ELEMENTS

DIFFERENT OPTIONS OF FILTER ELEMENTS WITH THE MYCLEAN AND ZEROSPARK® CONCEPTS

Wide range of filter elements in various filtration grades for all MP Filtri filters and as market interchanges.



THE X CONCEPT FOR OUR FILTERS



THE ANTI-STATIC FILTERS THE ZANTISTATIC CONCEPT FOR OUR FILTERS




TANK ACCESSORIES

The complete range of tank accessories for hydraulic circuits comprises breather filters, filler and breather filters, filler caps, visual and electrical level indicators, pressure gauges selectors, flanges for fixing the oil tubes on the tank cover and inspection doors. Filler and breather filters have a dual function at the

tank inlet in the filtration of the incoming air and the pre-filtration of the fluid through the basket, in order to prevent the entry of foreign bodies during the filling or refilling operations.

AIR BREATHERS AND FILLER PLUGS

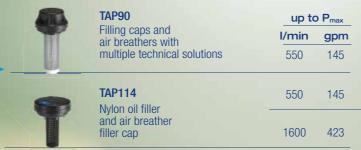

TA80 Metal oil filler and air breather filler cap



VISUAL OIL LEVEL INDICATORS

Available in three sizes, to monitor the fluid in the tank





POWER TRANSMISSION

COUPLINGS



Drive couplings provide the means by which power is transmitted from the electric motor to the hydraulic pump.





The e-PTO coupling is specifically for electrically powered power take-offs

BELL-HOUSINGS

Bell-Housings are used as connecting elements between IEC electric motors and a wide range of hydraulic pumps available on the international market



CONTAMINATION CONTROL SOLUTIONS

MP Filtri designs and manufactures a complete range of contamination control solutions aimed at increasing the life and the productivity of the hydraulic circuits. The technology developed by our Contamination Monitoring Products division allows preventive and predictive maintenance, quaranteeing maximum continuity of operation, a longer life cycle of the components and a relative reduction in costs. A complete solution that combines highly functional and energy-efficient systems with a wide range of after-sales services.

CONTAMINATION MONITORING **PRODUCTS**



LPA3 Portable Light Extinction Particle Analysei

CML4 Compact Portable **Contamination Monitor**

IN-LINE CONTAMINATION MONITORS



ICM 2.0 / 4.0 In-line Contamination Monitor



ICS In-line Contamination Sensors

MOBILE FILTRATION UNITS









UFM 015

UFM 041

UFM 051

UFM 091 UFM 181 **UFM 919**

15 l/min 34 I/min 50 I/min

90 I/min - 180 I/min (13.20 gpm) (23.77 gpm - 47.55 gpm)

WORLDWIDE NETWORK

CANADA • CHINA • FRANCE • GERMANY • INDIA • SINGAPORE UNITED ARAB EMIRATES • UNITED KINGDOM • USA



in ◎ **□** f



mpfiltri.com Scan or click me!