

GRF 3

Mobile Filtration Unit - 5 / 10 gpm



Description

Mobile filtration units

GRF 3 mobile filtration units are cost effective and efficient in transferring or conditioning fluid in hydraulic reservoirs.

Portable filtration unit with selection of MPS350 dual spin-on or LMP211 cartridge style discharge filter assembly with a wide selection of filter media including water removal with optional ICM 2.0 or ICM 4.0 contamination monitor.

Applications

- Oil transfer from bulk drums to tank
- Reservoir clean-up

> Features & Benefits

- 1 HP, 120 VAC, 1- Phase TEFC motor with cord and plug
- Rugged 5 gpm or 10 gpm gear pump with integral relief valve
- 10 ft. wire reinforced clear suction and discharge hoses with stainless steel wands
- Heavy Duty hand truck with pneumatic tires powder coated MP Filtri blue
- Large drip pan under filter element assemblies
- 2 pc 4ft. stainless steel wands
- Wand storage brackets with accommodations to contain excess in drip pan
- 25 ft. electrical cord with end plug, includes cord storage hook
- On-board sealed on/off switch

Suction Side

- 1 pc CSG100M90A - 90 μm wire mesh element

Discharge Side - 1


- 1 pc MPS350 Dual Spin-on with 25 psi bypass
- Choice of 1, 3, 6, 10, 25 µm elements available
- With indicator

Discharge Side - 2

- 1 pc LMP 2102 housing with 50 psi bypass
- Choice of 1, 3, 6, 10, 25 µm elements available
- With indicator




Dimensions

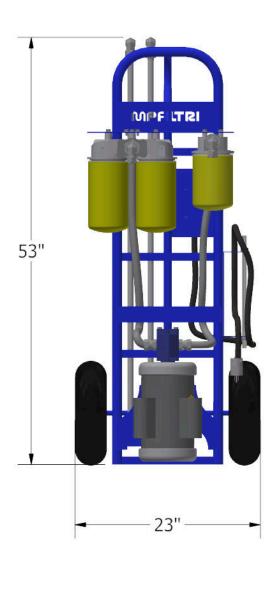



GRF 3

Designation & Ordering code

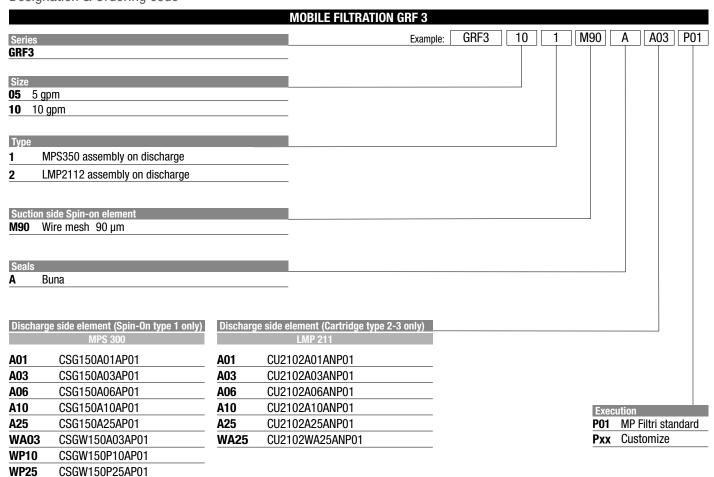

Note: Consult factory for options not listed

MP Filtri reserves the right to make improvements in design, product features and specifications at anytime without notice.

