

HIGH CAPACITY INDUSTRIAL FILTERS

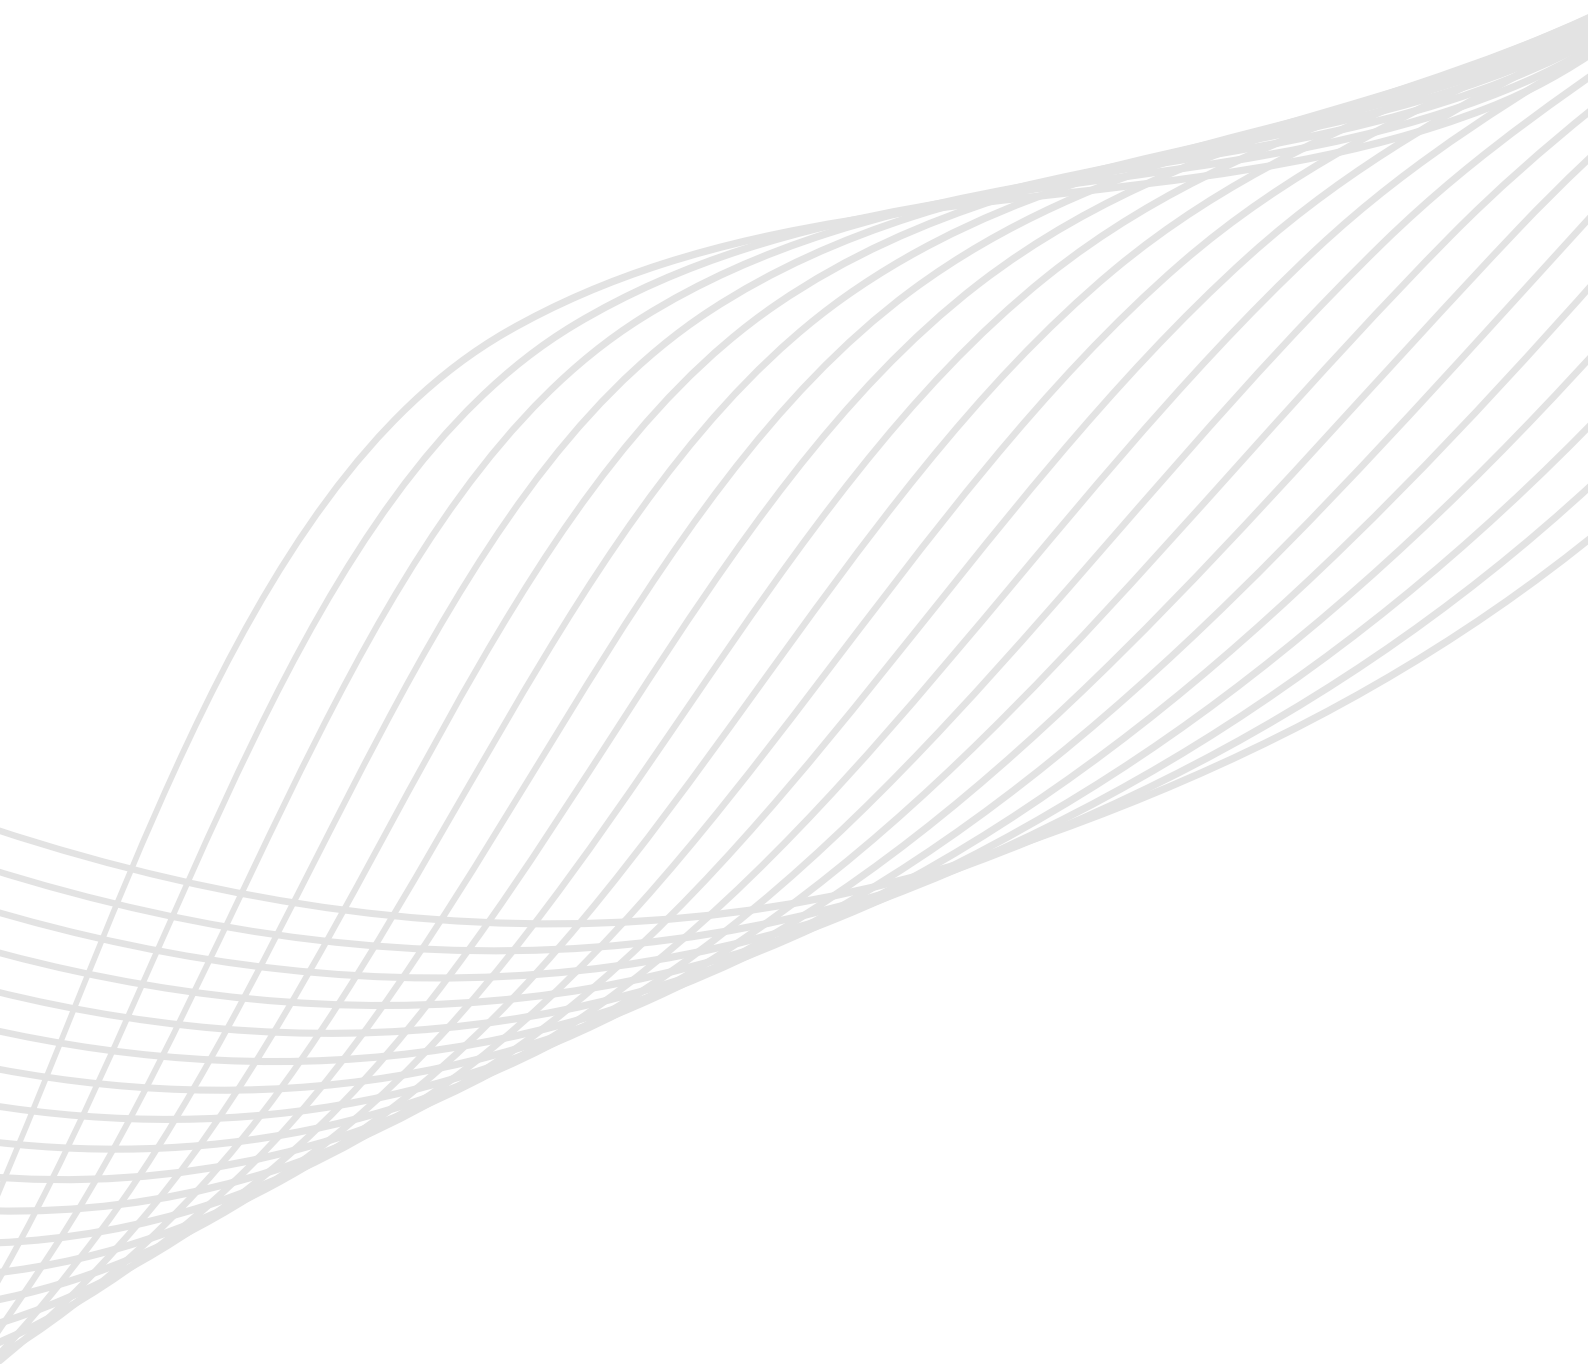
**HYDRAULIC
FILTRATION**

CATALOGUE



MPFILTRI®

PASSION TO PERFORM



CONTAMINATION MANAGEMENT

INDEX

	Page
① HYDRAULIC FLUIDS	12
② FLUIDS CONTAMINATION	12
③ FLUIDS COMPATIBILITY CHART	12
④ EFFECTS OF CONTAMINATION ON HYDRAULIC COMPONENTS	13
⑤ MEASURING THE SOLID CONTAMINATION LEVEL	13
⑥ FILTRATION TECHNOLOGIES	16
⑦ RECOMMENDED CONTAMINATION CLASSES	17
⑧ TYPES OF FILTERS	17
⑨ FILTER SIZING PARAMETERS	18
⑩ APPLICABLE STANDARDS FOR FILTER DEVELOPMENT	18
⑪ WATER IN HYDRAULIC AND LUBRICATING FLUIDS	19
⑫ THE ANTI-STATIC FILTERS zerospark+	20

1 HYDRAULIC FLUIDS

The fluid is the vector that transmits power, energy within an oleodynamic circuit. In addition to transmitting energy through the circuit, it also performs additional functions such as lubrication, protection and cooling of the surfaces.

The classification of fluids used in hydraulic systems is coded in many regulatory references, different Standards.

The most important classification system for hydraulic fluids is the one defined by International Organization for Standardization (ISO), which established a classification system within their standard: "ISO 6743-4 Lubricants, Industrial Oils and Related Products". In particular, the parts of interest for hydraulic fluids are:

- Lubricants, industrial oils and related products (class L)
- Classifications - Part 4L - Family H (Hydraulic systems)

The ISO 6743-4 classification system can be generally applied to the three primary classes of hydraulic fluids:

- Mineral Oils (i.e.: petroleum) Hydraulic Fluids (i.e.: HH: Mineral lubricants without corrosion inhibitors; HL: HH-type lubricants with oxidation reduction and anticorrosive additives; HM: HL-type lubricants with anti-wear additives; HV: HM-type lubricants with a higher viscosity grade and temperature properties; and others).
- Biodegradable Hydraulic Fluids (HExx), also defined as "Environmentally acceptable hydraulic fluids".
- Fire Resistant Hydraulic Fluids (HFxx), which could be further split into: Fire-resistant aqueous fluids (HFAx, HFB; HFC); Fire-resistant synthetic anhydrous fluids (HFDx).

The choice of fluid for an hydraulic system must take into account several parameters.

These parameters can adversely affect the performance of an hydraulic system, causing delay in the controls, pump cavitation, excessive absorption, excessive temperature rise, efficiency reduction, increased drainage, wear, jam/block or air intake in the plant.

The main properties that characterize hydraulic fluids and affect their choice are:

- **DYNAMIC VISCOSITY**
It identifies the fluid's resistance to sliding due to the impact of the particles forming it.
- **KINEMATIC VISCOSITY**
It is a widespread formal dimension in the hydraulic field.
It is calculated with the ratio between the dynamic viscosity and the fluid density.
Kinematic viscosity varies with temperature and pressure variations.
- **VISCOSITY INDEX**
This value expresses the ability of a fluid to maintain viscosity when the temperature changes.
A high viscosity index indicates the fluid's ability to limit viscosity variations by varying the temperature.
- **FILTERABILITY INDEX**
It is the value that indicates the ability of a fluid to cross the filter materials.
A low filterability index could cause premature clogging of the filter material.
- **WORKING TEMPERATURE**
Working temperature affects the fundamental characteristics of the fluid.
As already seen, some fluid characteristics, such as cinematic viscosity, vary with the temperature variation.

When choosing a hydraulic oil, must therefore be taken into account of the environmental conditions in which the machine will operate.

- **COMPRESSIBILITY MODULE**
Every fluid subjected to a pressure contracts, increasing its density.
The compressibility module identifies the increase in pressure required to cause a corresponding increase in density.
- **HYDROLYTIC STABILITY**
It is the characteristic that prevents galvanic pairs that can cause wear in the plant/system.
- **ANTIOXIDANT STABILITY AND WEAR PROTECTION**
These features translate into the capacity of a hydraulic oil to avoid corrosion of metal elements inside the system.
- **HEAT TRANSFER CAPACITY**
It is the characteristic that indicates the capacity of hydraulic oil to exchange heat with the surfaces and then cool them.

2 FLUID CONTAMINATION

Whatever the nature and properties of fluids, they are inevitably subject to contamination. Fluid contamination can have two origins:

- **INITIAL CONTAMINATION**
Caused by the introduction of contaminated fluid into the circuit, or by incorrect storage, transport or transfer operations.
- **PROGRESSIVE CONTAMINATION**
Caused by factors related to the operation of the system, such as metal surface wear, sealing wear, oxidation or degradation of the fluid, the introduction of contaminants during maintenance, corrosion due to chemical or electrochemical action between fluid and components, cavitation.
The contamination of hydraulic systems can be of different nature:
- **SOLID CONTAMINATION**
For example rust, slag, metal particles, fibers, rubber particles, paint particles or additives
- **LIQUID CONTAMINATION**
For example, the presence of water due to condensation or external infiltration or acids
- **GASEOUS CONTAMINATION**
For example, the presence of air due to inadequate oil level in the tank, drainage in suction ducts, incorrect sizing of tubes or tanks.

3 FLUID COMPATIBILITY CHARTS

For more detailed information on specific fluid compatibility please refer to the fluid compatibility charts on our website:



Scan or click me!

④ EFFECTS OF CONTAMINATION ON HYDRAULIC COMPONENTS

Solid contamination is recognized as the main cause of malfunction, failure and early degradation in hydraulic systems. It is impossible to delete it completely, but it can be effectively controlled by appropriate devices.

CONTAMINATION IN PRESENCE OF LARGE TOLERANCES



CONTAMINATION IN PRESENCE OF NARROW TOLERANCES



Solid contamination mainly causes surface damage and component wear.

- ABRASION OF SURFACES
Cause of leakage through mechanical seals, reduction of system performance, failures.
- SURFACE EROSION
Cause of leakage through mechanical seals, reduction of system performance, variation in adjustment of control components, failures.
- ADHESION OF MOVING PARTS
Cause of failure due to lack of lubrication.
- DAMAGES DUE TO FATIGUE
Cause of breakdowns and components breakdown.

ABRASION



EROSION



ADHESION



FATIGUE



Liquid contamination mainly results in decay of lubrication performance and protection of fluid surfaces.

DISSOLVED WATER

- INCREASING FLUID ACIDITY
Cause of surface corrosion and premature fluid oxidation
- GALVANIC COUPLE AT HIGH TEMPERATURES
Cause of corrosion

FREE WATER - ADDITIONAL EFFECTS

- DECAY OF LUBRICANT PERFORMANCE
Cause of rust and sludge formation, metal corrosion and increased solid contamination
- BATTERY COLONY CREATION
Cause of worsening in the filterability feature

- ICE CREATION AT LOW TEMPERATURES
Cause damage to the surface
- ADDITIVE DEPLETION
Free water retains polar additives

Gaseous contamination mainly results in decay of system performance.

- CUSHION SUSPENSION
Cause of increased noise and cavitation.
- FLUID OXIDATION
Cause of corrosion acceleration of metal parts.
- MODIFICATION OF FLUID PROPERTIES (COMPRESSIBILITY MODULE, DENSITY, VISCOSITY)
Cause of system's reduction of efficiency and of control.
It is easy to understand how a system without proper contamination management is subject to higher costs than a system that is provided.
- MAINTENANCE
Increase maintenance activities, spare parts, machine stop costs.
- ENERGY AND EFFICIENCY
Efficiency and performance reduction due to friction, drainage, cavitation.


⑤ MEASURING THE SOLID CONTAMINATION LEVEL

The level of contamination of a system identifies the amount of contaminant contained in a fluid. This parameter refers to a unit volume of fluid. The level of contamination may be different at different points in the system. From the information in the previous paragraphs it is also apparent that the level of contamination is heavily influenced by the working conditions of the system, by its working years and by the environmental conditions.


What is the size of the contaminating particles that we must handle in our hydraulic circuit?



HUMAN HAIR
(75 µm)



MINIMUM DIMENSION
VISIBLE WITH HUMAN
EYES
(40 µm)



TYPICAL CONTAMINANT
DIMENSION IN A
HYDRAULIC CIRCUIT
(4 - 14 µm)

Contamination level analysis is significant only if performed with a uniform and repeatable method, conducted with standard test methods and suitably calibrated equipment. To this end, ISO has issued a set of standards that allow tests to be conducted and express the measured values in the following ways.

- GRAVIMETRIC LEVEL - ISO 4405

The level of contamination is defined by checking the weight of particles collected by a laboratory membrane. The membrane must be cleaned, dried and desiccated, with fluid and conditions defined by the Standard. The volume of fluid is filtered through the membrane by using a suitable suction system. The weight of the contaminant is determined by checking the weight of the membrane before and after the fluid filtration.



CLEAN
MEMBRANE



CONTAMINATED
MEMBRANE

CONTAMINATION MANAGEMENT

- CUMULATIVE DISTRIBUTION OF THE PARTICLES SIZE - ISO 4406

The level of contamination is defined by counting the number of particles of certain dimensions per unit of volume of fluid. Measurement is performed by Contamination Monitoring Products (CMP).

Following the count, the contamination classes are determined, corresponding to the number of particles detected in the unit of fluid.

The most common classification methods follow ISO 4406 and SAE AS 4059 (Aerospace Sector) regulations.

NAS 1638 is still used although obsolete.

Classification example according to ISO 4406

The International Standards Organization standard ISO 4406 is the preferred method of quoting the number of solid contaminant particles in a sample. The level of contamination is defined by counting the number of particles of certain dimensions per unit of volume of fluid. The measurement is performed by Contamination Monitoring Products (CMP).

The numbers represent a code which identifies the number of particles of certain sizes in 1ml of fluid. Each code number has a particular size range. The first scale number represents the number of particles equal to or larger than 4 $\mu\text{m}_{(c)}$ per millilitre of fluid; The second scale number represents the number of particles equal to or larger than 6 $\mu\text{m}_{(c)}$ per millilitre of fluid; The third scale number represents the number of particles equal to or larger than 14 $\mu\text{m}_{(c)}$ per millilitre of fluid.


ISO 4406 - Allocation of Scale Numbers

Class	Number of particles per ml	
	Over	Up to
28	1 300 000	2 500 000
27	640 000	1 300 000
26	320 000	640 000
25	160 000	320 000
24	80 000	160 000
23	40 000	80 000
22	20 000	40 000
21	10 000	20 000
20	5 000	10 000
19	2 500	5 000
18	1 300	2 500
17	640	1 300
16	320	640
15	160	320
14	80	160
13	40	80
12	20	40
11	10	20
10	5	10
9	2.5	5
8	1.3	2.5
7	0.64	1.3
6	0.32	0.64
5	0.16	0.32
4	0.08	0.16
3	0.04	0.08
2	0.02	0.04
1	0.01	0.02
0	0	0.01

> 4 $\mu\text{m}_{(c)}$ = 350 particles
> 6 $\mu\text{m}_{(c)}$ = 100 particles
> 14 $\mu\text{m}_{(c)}$ = 25 particles
16 / 14 / 12

ISO 4406 Cleanliness Code System

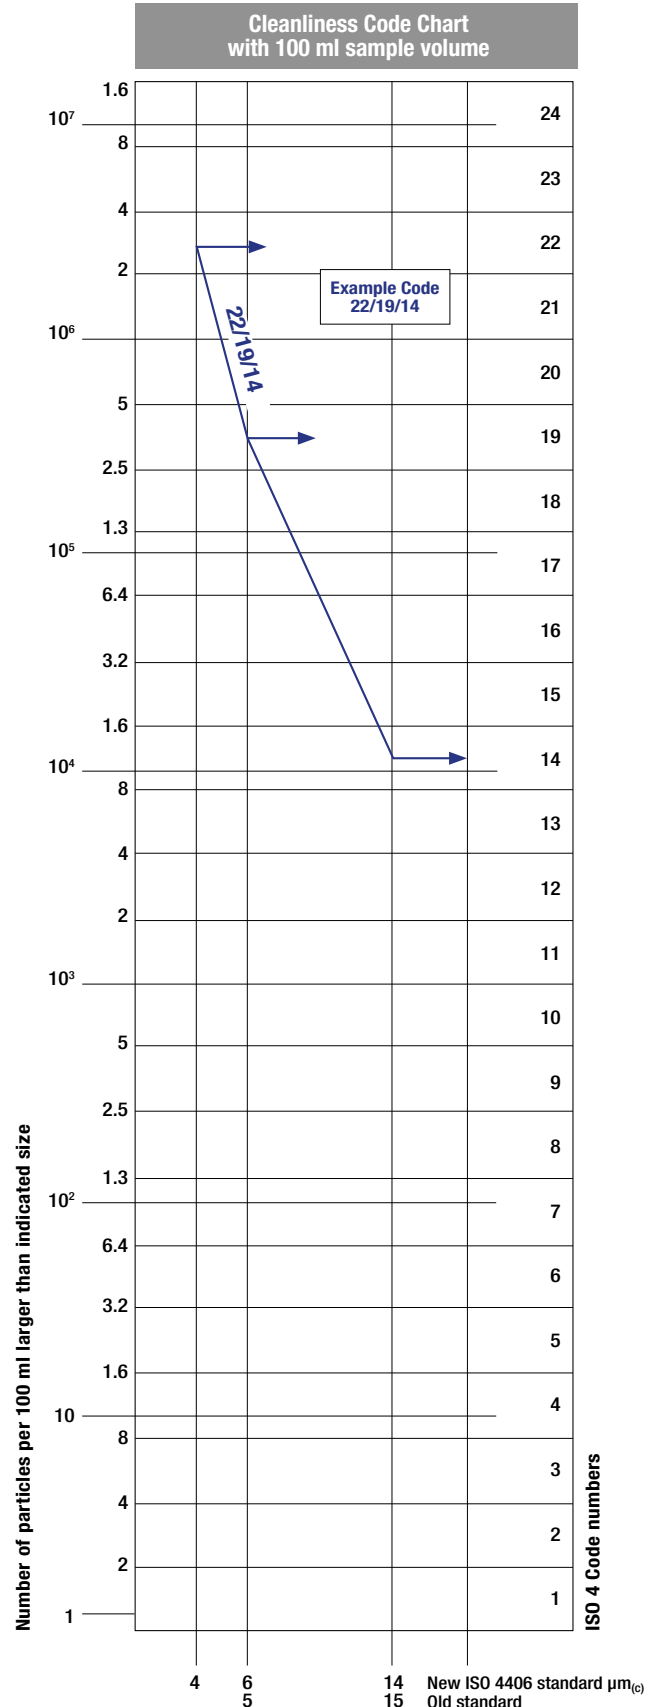Microscope counting examines the particles differently to Contamination Monitoring Products (CMP) and the code is given with two scale numbers only. These are at 5 μm and 15 μm equivalent to the 6 $\mu\text{m}_{(c)}$ and 14 $\mu\text{m}_{(c)}$ of Contamination Monitoring Products (CMP).



- CUMULATIVE DISTRIBUTION OF THE PARTICLES SIZE SAE AS4059-1 and SAE AS4059-2

Classification example according to SAE AS4059 - Rev. G

The code, prepared for the aerospace industry, is based on the size, quantity, and particle spacing in a 100 ml fluid sample. The contamination classes are defined by numeric codes, the size of the contaminant is identified by letters (A-F).

This SAE Aerospace Standard (AS) defines cleanliness levels for particulate contamination of hydraulic fluids and includes methods of reporting data relating to the contamination levels. Tables 1 and 2 below provide differential and cumulative particle counts respectively for counts obtained by an automatic particle counter, e.g. LPA3.

Table 1 - Class for differential measurement

Class	Dimension of contaminant Maximum Contamination Limits per 100 ml					(3)
	5-15 µm	15-25 µm	25-50 µm	50-100 µm	>100 µm	
	6-14 µm _(c)	14-21 µm _(c)	21-38 µm _(c)	38-70 µm _(c)	>70 µm _(c)	
00	125	22	4	1	0	(1)
0	250	44	8	2	0	(2)
1	500	89	16	3	1	
2	1 000	178	32	6	1	
3	2 000	356	63	11	2	
4	4 000	712	126	22	4	
5	8 000	1 425	253	45	8	
6	16 000	2 850	506	90	16	
7	32 000	5 700	1 012	180	32	
8	64 000	11 400	2 025	360	64	
9	128 000	22 800	4 050	720	128	
10	256 000	45 600	8 100	1 440	256	
11	512 000	91 200	16 200	2 880	512	
12	1 024 000	182 400	32 400	5 760	1 024	

6 - 14 µm _(c) = 15 000 particles
14 - 21 µm _(c) = 2 200 particles
21 - 38 µm _(c) = 200 particles
38 - 70 µm _(c) = 35 particles
> 70 µm _(c) = 3 particles
SAE AS4059 REV G - Class 6

(1) Size range, optical microscope, based on longest dimension as measured per AS598 or ISO 4407. (2) Size range CMP calibrated per ISO 11171 or an optical or electron microscope with image analysis software, based on projected area equivalent diameter. (3) Contamination classes and particle count limits are identical to NAS 1638.

Table 2 - Class for cumulative measurement

Class	Dimension of contaminant Maximum Contamination Limits per 100 ml						(1)
	>1 µm	>5 µm	>15 µm	>25 µm	>50 µm	>100 µm	
	>4 µm _(c)	>6 µm _(c)	>14 µm _(c)	>21 µm _(c)	>38 µm _(c)	>70 µm _(c)	
000	195	76	14	3	1	0	(2)
00	390	152	27	5	1	0	
0	780	304	54	10	2	0	
1	1 560	609	109	20	4	1	
2	3 120	1 217	217	39	7	1	
3	6 250	2 432	432	76	13	2	
4	12 500	4 864	864	152	26	4	
5	25 000	9 731	1 731	306	53	8	
6	50 000	19 462	3 462	612	106	16	
7	100 000	38 924	6 924	1 224	212	32	
8	200 000	77 849	13 849	2 449	424	64	
9	400 000	155 698	27 698	4 898	848	128	
10	800 000	311 396	55 396	9 796	1 696	256	
11	1 600 000	622 792	110 792	19 592	3 392	512	
12	3 200 000	1 245 584	221 584	39 184	6 784	1 024	

> 4 µm _(c) = 45 000 particles
> 6 µm _(c) = 15 000 particles
> 14 µm _(c) = 1 500 particles
> 21 µm _(c) = 250 particles
> 38 µm _(c) = 15 particles
> 70 µm _(c) = 3 particle
SAE AS4059 REV G
cpc* Class 6 6/6/5/5/4/2

* cumulative particle count

- CLASSES OF CONTAMINATION ACCORDING TO NAS 1638 (January 1964)

The NAS system was originally developed in 1964 to define contamination classes for the contamination contained within aircraft components.

The application of this standard was extended to industrial hydraulic systems simply because nothing else existed at the time.

The coding system defines the maximum numbers permitted of 100 ml volume at various size intervals (differential counts) rather than using cumulative counts as in ISO 4406. Although there is no guidance given in the standard on how to quote the levels, most industrial users quote a single code which is the highest recorded in all sizes and this convention is used on MP Filtri Contamination Monitoring Products (CMP).

The contamination classes are defined by a number (from 00 to 12) which indicates the maximum number of particles per 100 ml, counted on a differential basis, in a given size bracket.

Size Range Classes (in microns)

Maximum Contamination Limits per 100 ml					
Class	5-15	15-25	25-50	50-100	>100
00	125	22	4	1	0
0	250	44	8	2	0
1	500	89	16	3	1
2	1 000	178	32	6	1
3	2 000	356	63	11	2
4	4 000	712	126	22	4
5	8 000	1 425	253	45	8
6	16 000	2 850	506	90	16
7	32 000	5 700	1 012	180	32
8	64 000	11 400	2 025	360	64
9	128 000	22 800	4 050	720	128
10	256 000	45 600	8 100	1 440	256
11	512 000	91 200	16 200	2 880	512
12	1 024 000	182 400	32 400	5 760	1 024

5-15 µm = 42 000 particles
15-25 µm = 2 200 particles
25-50 µm = 150 particles
50-100 µm = 18 particles
> 100 µm = 3 particles
Class NAS 8

- CUMULATIVE DISTRIBUTION OF THE PARTICLES SIZE - ISO 4407

The level of contamination is defined by counting the number of particles collected by a laboratory membrane per unit of fluid volume. The measurement is done by a microscope. The membrane must be cleaned, dried and desiccated, with fluid and conditions defined by the Standard. The fluid volume is filtered through the membrane, using a suitable suction system.

The level of contamination is identified by dividing the membrane into a predefined number of areas and by counting the contaminant particles using a suitable laboratory microscope.

MICROSCOPE CONTROL
AND MEASUREMENT



Example figure 1 and 2

COMPARISON PHOTOGRAPH'S
1 graduation = 10µm



Fig. 1



Fig. 2



For other comparison photographs for contamination classes see the "Filtration and Particle Analyser Handbook".

Scan or click me!

- CLEANLINESS CODE COMPARISON

Although ISO 4406 standard is being used extensively within the hydraulics industry other standards are occasionally required and a comparison may be requested. The table below gives a very general comparison but often no direct comparison is possible due to the different classes and sizes involved.

ISO 4406	SAE AS4059 Table 2	SAE AS4059 Table 1	NAS 1638
> 4 $\mu\text{m}_{(c)}$ 6 $\mu\text{m}_{(c)}$ 14 $\mu\text{m}_{(c)}$	> 4 $\mu\text{m}_{(c)}$ 6 $\mu\text{m}_{(c)}$ 14 $\mu\text{m}_{(c)}$	4-6 6-14 14-21 21-38 38-70 >70	5-15 15-25 25-50 50-100 >100
23 / 21 / 18	13A / 12B / 12C	12	12
22 / 20 / 17	12A / 11B / 11C	11	11
21 / 19 / 16	11A / 10B / 10C	10	10
20 / 18 / 15	10A / 9B / 9B	9	9
19 / 17 / 14	9A / 8B / 8C	8	8
18 / 16 / 13	8A / 7B / 7C	7	7
17 / 15 / 12	7A / 6B / 6C	6	6
16 / 14 / 11	6A / 5B / 5C	5	5
15 / 13 / 10	5A / 4B / 4C	4	4
14 / 12 / 09	4A / 3B / 3C	3	3

6 FILTRATION TECHNOLOGIES

Various mechanisms such as mechanical stoppage, magnetism, gravimetric deposit, or centrifugal separation can be used to reduce the level of contamination.

The mechanical stoppage method is most effective and can take place in two ways:

- SURFACE FILTRATION

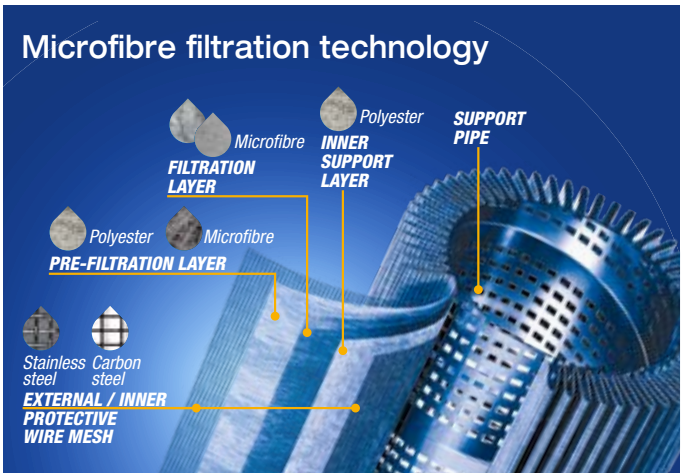
It is by direct interception. The filter prevents particles larger than the pores from continuing in the plant / system. Surface filters are generally manufactured with metal canvases or meshes.

- DEPTH FILTERING

Filters are constructed by fiber interlacing. Such wraps form pathways of different shapes and sizes in which the particles remain trapped when they find smaller apertures than their diameter.

Depth filters are generally produced with papers impregnated with phenolic resins, metal fibers or inorganic fibers.

In inorganic fiber filtration, commonly called microfibre, the filtering layers are often overlapped in order to increase the ability to retain the contaminant.



The filtration efficiency of metallic mesh filtrations is defined as the maximum particle size that can pass through the meshes of the filtering grid. The efficiency of microfibre and paper filtration ($\beta_{x(c)}$) is defined through a lab test called Multipass Test. The efficiency value ($\beta_{x(c)}$) is defined as the ratio between the number of particles of certain dimensions detected upstream and downstream of the filter.

$$\frac{\text{Upstream particles number} > X \mu\text{m}_{(c)}}{\text{Downstream particles number} > X \mu\text{m}_{(c)}} = \beta_{x(c)}$$




Value ($\beta_{x(c)}$)	2	10	75	100	200	1000
Efficiency	50%	90%	98.7%	99%	99.5%	99.9%

Test conditions, such as type of fluid to be used (MIL-H-5606), type of contaminant to be used (ISO MTD), fluid viscosity, test temperature, are determined by ISO 16889.

In addition to the filtration efficiency value during the Multipass test, other important features, such as filtration stability (β stability) and dirt holding capacity (DHC), are also tested.

Poor filtration stability is the cause of the filtering quality worsening as the filter life rises. Low dirt holding capacity causes a reduction in the life of the filter.

WIRE MESH FILTRATION



PAPER FILTRATION



MICROFIBER FILTRATION



Filtration ISO Standard Comparison

$\beta_{x(c)} > 1000$ ISO 16889	$\beta_x > 200$ ISO 4572	MP Filtri Filter media code
5 $\mu\text{m}_{(c)}$	3 μm	A03
7 $\mu\text{m}_{(c)}$	6 μm	A06
10 $\mu\text{m}_{(c)}$	10 μm	A10
16 $\mu\text{m}_{(c)}$	18 μm	A16
21 $\mu\text{m}_{(c)}$	25 μm	A25

7 RECOMMENDED CONTAMINATION CLASSES

Any are the nature and the properties of fluids, they are inevitably subject to contamination. The level of contamination can be managed by using special components called filters.

Hydraulic components builders, knowing the problem of contamination, recommend the filtration level appropriate to the use of their products.

Example of recommended contamination levels for pressures below 140 bar.

Piston pumps with fixed flow rate	•					
Piston pumps with variable flow rate			•			
Vane pumps with fixed flow rate		•				
Vane pumps with variable flow			•			
Engines	•					
Hydraulic cylinders	•					
Actuators					•	
Test benches						•
Check valve	•					
Directional valves	•					
Flow regulating valves	•					
Proportional valves				•		
Servo-valves					•	
Flat bearings			•			
Ball bearings				•		
ISO 4406 CODE	20/18/15	19/17/14	18/16/13	17/15/12	16/14/11	15/13/10
Recommended filtration $\beta_{x(c)} \geq 1.000$	$\beta_{21(c)} > 1000$	$\beta_{15(c)} > 1000$	$\beta_{10(c)} > 1000$	$\beta_{7(c)} > 1000$	$\beta_{7(c)} > 1000$	$\beta_{5(c)} > 1000$
MP Filtri media code	A25	A16	A10	A06	A06	A03

The common classification of filters is determined by their position in the plant.

8 TYPES OF FILTERS

Suction filters

They are positioned before the pump and are responsible for protecting the pump from dirty contaminants. It also provides additional flow guidance to the pump suction line.

Being subject to negligible working pressures are manufactured with simple and lightweight construction.

They are mainly produced with gross grade surface filtrations, mainly $60 \div 125 \mu\text{m}$.

They can be equipped with a magnetic filter for retaining ferrous particles.

They are generally placed under the fluid head to take advantage of the piezometric thrust of the fluid and reduce the risk of cavitation.

There are two types of suction filters:

- IMMERSION FILTERS

Simple filter element screwed on the suction pipe

- FILTERS WITH CONTAINER

Container filters that are more bulky, but provide easier maintenance of the tank

Delivery (or Pressure) filters

They are positioned between the pump and most sensitive regulating and controlling components, such as servo valves or proportional valves, and are designed to ensure the class of contamination required by the components used in the circuit.

Being subjected to high working pressures are manufactured with more robust and articulated construction. In particular situations of corrosive environments or aggressive fluids can be made of stainless steel.

They are mainly produced with filtering depths of $3 \div 25 \mu\text{m}$.

They can be manufactured with in-line connections, with plate or flange connections or directly integrated into the circuit control blocks / manifolds.

They can also be manufactured in duplex configuration to allow the contaminated section to be maintained even when the plant / system is in operation without interruption of the working cycle.

Return filters

They are positioned on the return line to the tank and perform the task of filtering the fluid from particles entering the system from the outside or generated by the wear of the components.

They are generally fixed to the reservoir (for this reason also called top tank mounted), positioned semi-immersed or completely immersed.

The positioning of the return filters must guarantee in all operating conditions that the fluid drainage takes place in immersed condition; this is to avoid creating foams in the tank that can cause malfunctions or cavitation in the pumps.

For the sizing of the return filters, account must be taken of the presence of accumulators or cylinders that can make the return flow considerably greater than the pump suction flow rate.

Being subject to contained working pressures are manufactured with simple and lightweight construction.

Normally it is possible to extract the filter element without disconnecting the filter from the rest of the system.

Combined filters

They are designed to be applied to systems with two or more circuits. They are commonly used in hydrostatic transmission machines where they have a dual filtration function of the return line and suction line of the hydrostatic transmission pump.

The filter is equipped with a valve that keeps the 0.5 bar pressure inside the filter. A portion of the fluid that returns to the tank is filtered by the return filter element, generally produced with absolute filtration, and returns to the transmission booster pump.

Only excess fluid returns to the tank through the valve.

The internal pressure of the filter and the absolute filtration help to avoid the cavitation phenomenon inside the pump.

Off-line filters

They are generally used in very large systems / plants, placed in a closed circuit independent from the main circuit. They remain in operation regardless of the operation of the main circuit and are crossed by a constant flow rate.

They can also be manufactured in duplex configuration to allow the contaminated section to be maintained even when the unit is in operation without interruption of the work cycle.

Venting filters

During the operation of the plants, the fluid level present in the reservoir changes continuously.

The result of this continuous fluctuation is an exchange of air with the outside environment.

The venting filter function, positioned on the tank, is to filter the air that enters the tank to compensate for fluid level variations.

9 FILTER SIZING PARAMETERS

The choice of the filter system for an hydraulic system is influenced by several factors.

It is necessary to consider the characteristics of the various components present in the plant and their sensitivity to contamination.

It is also necessary to consider all the tasks that the filter will have to do within the plant:

- FLUID PROTECTION FROM CONTAMINATION
- PROTECTION OF OLEODYNAMIC COMPONENTS SENSITIVE TO CONTAMINATION
- PROTECTION OF OLEODYNAMIC PLANTS FROM ENVIRONMENTAL WASTE
- PROTECTION OF OLEODYNAMIC PLANTS FROM CONTAMINATION CAUSED BY COMPONENTS' FAILURES

The advantages of proper positioning and sizing of the filters are

- MORE RELIABILITY OF THE SYSTEM
- LONGER LIFE OF THE FLUID COMPONENTS
- REDUCTION OF STOP TIME
- REDUCTION OF FAILURE CASUALTIES

Each hydraulic filter is described by general features that identify the possibility of use in different applications.

- **MAXIMUM WORKING PRESSURE (P_{max})**

The maximum working pressure of the filter must be greater than or equal to the pressure of the circuit section in which it will be installed.

- **PRESSURE DROP (ΔP)**

The pressure drop depends on a number of factors, such as the working circuit temperature, the fluid viscosity, the filter element cleaning condition.

- **WORKING TEMPERATURE (T)**

The working temperature deeply affect the choice of materials. Excessively high or low temperatures may adversely affect the strength of the materials or the characteristics of the seals.

- **FILTRATION EFFICIENCY (%) / FILTRATION RATIO ($\beta_{x(c)}$)**

Filtration efficiency is the most important parameter to consider when selecting a filter.

When choosing the filtration performances, the needs of the most sensitive components in the system must be considered.

- **FLUID TYPE**

The type of fluid influences the choice of filters in terms of compatibility and viscosity. It is always mandatory to check the filterability.

- **PLACEMENT IN THE PLANT**

The position of the filter in the system conditions the efficiency of all filter performances.

10 APPLICABLE STANDARDS FOR FILTER DEVELOPMENT

In order to obtain unique criteria for development and verification of the filters performance, specific regulations for the filters and filter elements testing have been issued by ISO. These norms describe the target, the methodology, the conditions and the presentation methods for the test results.

ISO 2941

Hydraulic fluid power -- Filter elements -- Verification of collapse/burst pressure rating

This Standard describes the method for testing the collapse / burst resistance of the filter elements.

The test is performed by crossing the contaminated fluid filter element at a predefined flow rate. The progressive clogging of the filter element, determined by contamination, causes an increase in differential pressure.

ISO 2942

Hydraulic fluid power -- Filter elements -- Verification of fabrication integrity and determination of the first bubble point

This Standard describes the method to verify the integrity of the assembled filter elements.

It can be used to verify the quality of the production process or the quality of the materials by verifying the pressure value of the first bubble point.

ISO 2943

Hydraulic fluid power -- Filter elements -- Verification of material compatibility with fluids

This Standard describes the method to verify the compatibility of materials with certain hydraulic fluids.

The test is carried out by keeping the element (the material sample) immersed in the fluid under high or low temperature conditions for a given period of time and verifying the retention of the characteristics.

ISO 3723

Hydraulic fluid power -- Filter elements -- Method for end load test

This Standard describes the method for verifying the axial load resistance of the filter elements.

After performing the procedure described in ISO 2943, the designed axial load is applied to the filter element. To verify the test results, then the test described in ISO 2941 is performed.

ISO 3968

Hydraulic fluid power -- Filters -- Evaluation of differential pressure versus flow characteristics

This Standard describes the method for checking the pressure drop across the filter.

The test is carried out by crossing the filter from a given fluid and by detecting upstream and downstream pressures.

Some of the parameters defined by the Standard are the fluid, the test temperature, the size of the tubes, the position of the pressure detection points.

ISO 16889

Hydraulic fluid power -- Filters -- Multi-pass method for evaluating filtration performance of a filter element

This Standard describes the method to check the filtration characteristics of the filter elements.

The test is performed by constant introduction of contaminant (ISO MTD). The characteristics observed during the test are the filtration efficiency and the dirty holding capacity related to the differential pressure.

ISO 23181

Hydraulic fluid power -- Filter elements -- Determination of resistance to flow fatigue using high viscosity fluid

This Standard describes the method for testing the fatigue resistance of the filter elements. The test is carried out by subjecting the filter to continuous flow variations, thus differential pressure, using a high viscosity fluid.

ISO 11170

Hydraulic fluid power -- Sequence of tests for verifying performance characteristics of filter elements

The Standard describes the method for testing the performance of filter elements. The protocol described by the regulations provides the sequence of all the tests described above in order to verify all the working characteristics (mechanical, hydraulic and filtration).

ISO 10771-1

Hydraulic fluid power -- Fatigue pressure testing of metal pressure-containing envelopes -- Test method

This Standard describes the method to check the resistance of the hydraulic components with pulsing pressure.

It can be applied to all metal components (excluding tubes) subject to cyclic pressure used in the hydraulic field.

Saturation Levels

Since the effects of free (also emulsified) water is more harmful than those of dissolved water, water levels should remain well below the saturation point.

However, even water in solution can cause damage and therefore every reasonable effort should be made to keep saturation levels as low as possible. There is no such thing as too little water. As a guideline, we recommend maintaining saturation levels below 50% in all equipment.

TYPICAL WATER SATURATION LEVEL FOR NEW OILS

Examples:

Hydraulic oil @ 30°C = 200 ppm = 100% saturation

Hydraulic oil @ 65°C = 500 ppm = 100% saturation

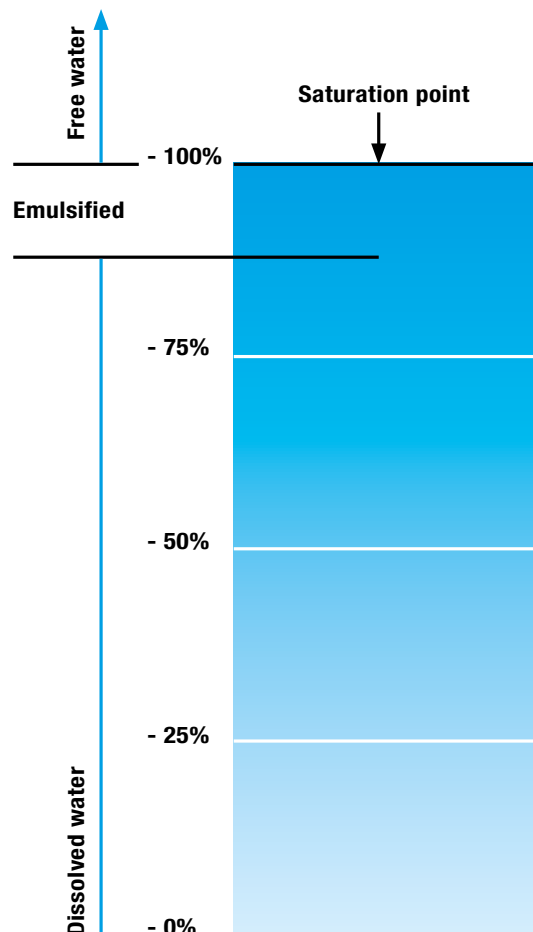
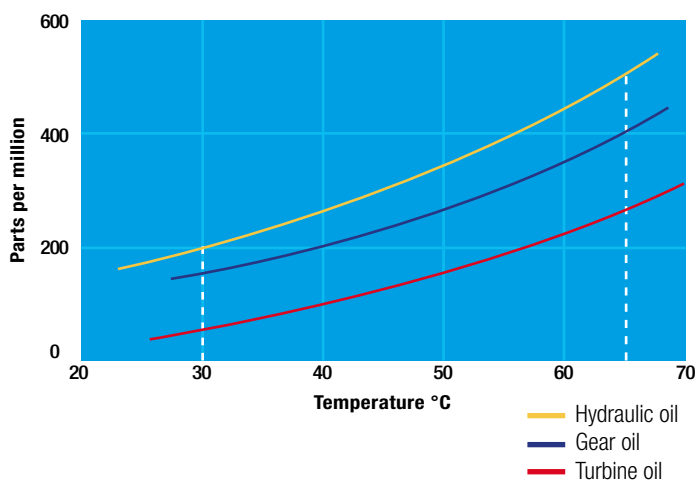
11 WATER IN HYDRAULIC AND LUBRICATING FLUIDS

Water Content

In mineral oils and non aqueous resistant fluids water is undesirable. Mineral oil usually has a water content of 50-300 ppm (@40°C) which it can support without adverse consequences.

Once the water content exceeds about 300ppm the oil starts to appear hazy. Above this level there is a danger of free water accumulating in the system in areas of low flow. This can lead to corrosion and accelerated wear.

Similarly, fire resistant fluids have a natural water which may be different to mineral oil.



WATER REMOVAL

Water is present everywhere, during storage, handling and servicing.

MP Filtri filter elements feature an absorbent media which protects hydraulic systems from both particulate and water contamination.

MP Filtri's filter element technology is available with inorganic microfiber media with a filtration rating 25 μm (therefore identified with media designation WA025), providing absolute filtration of solid particles to $\beta_{x(c)} = 1000$.

Absorbent media is made by water absorbent fibres which increase in size during the absorption process.

Free water is thus bonded to the filter media and completely removed from the system (it cannot even be squeezed out).

Filter Media

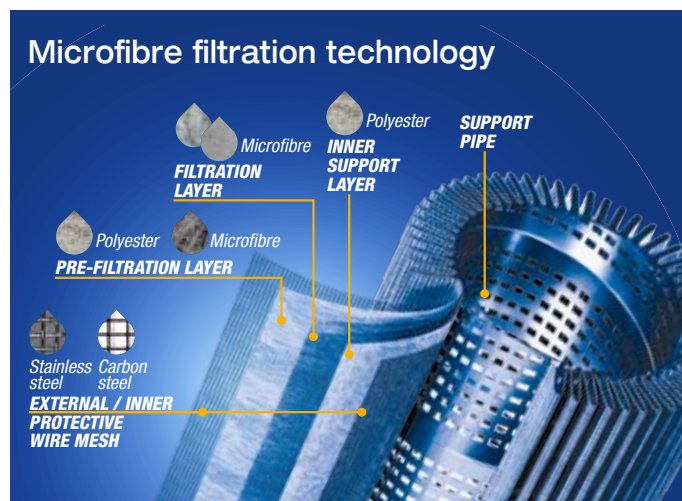


Fabric that absorbs water

Absorber media layer



The Filter Media has absorbed water



By removing water from your fluid power system, you can prevent such key problems as:

- corrosion (metal etching)
- loss of lubricant power
- accelerated abrasive wear in hydraulic components
- valve-locking
- bearing fatigue
- viscosity variance (reduction in lubricating properties)
- additive precipitation and oil oxidation
- increase in acidity level
- increased electrical conductivity (loss of dielectric strength)
- slow/weak response of control systems



Scan or click me!

For more details please refer to our dedicate brochure "WATER REMOVAL"

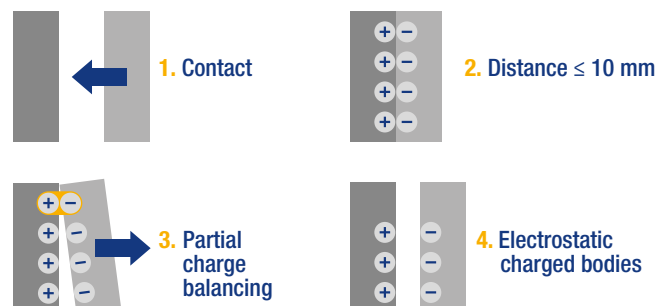
12 THE ANTI-STATIC FILTERS

zerospark®

zerospark is a specialist solution designed to solve the problem of electrostatic discharge inside hydraulic filters. Caused by the electrical charge build-up due to the passage of oil through the filters, this can result in damage to filter elements, oils and circuit components. It can even cause fire hazards in environments where flammable materials are present.

THE TRIBOELECTRIC EFFECT

The body with the most electronegativity strips electrons from the other, generating a build-up of a net negative charge on itself. The other body is charged by the same amount but with the opposite sign, giving rise to very high potential differences. These, if not dissipated, can give rise to electrostatic discharges.



Scan or click me!

For more details please refer to our dedicate brochure "ZEROSPARK"

Filters sizing software

The web-based software program will allow you to select the most suitable MP Filtri's Filters, in accordance with your process design requirements.

The program will automatically check your input design process prior to propose you the acceptable solutions and create an output in PDF report style format.

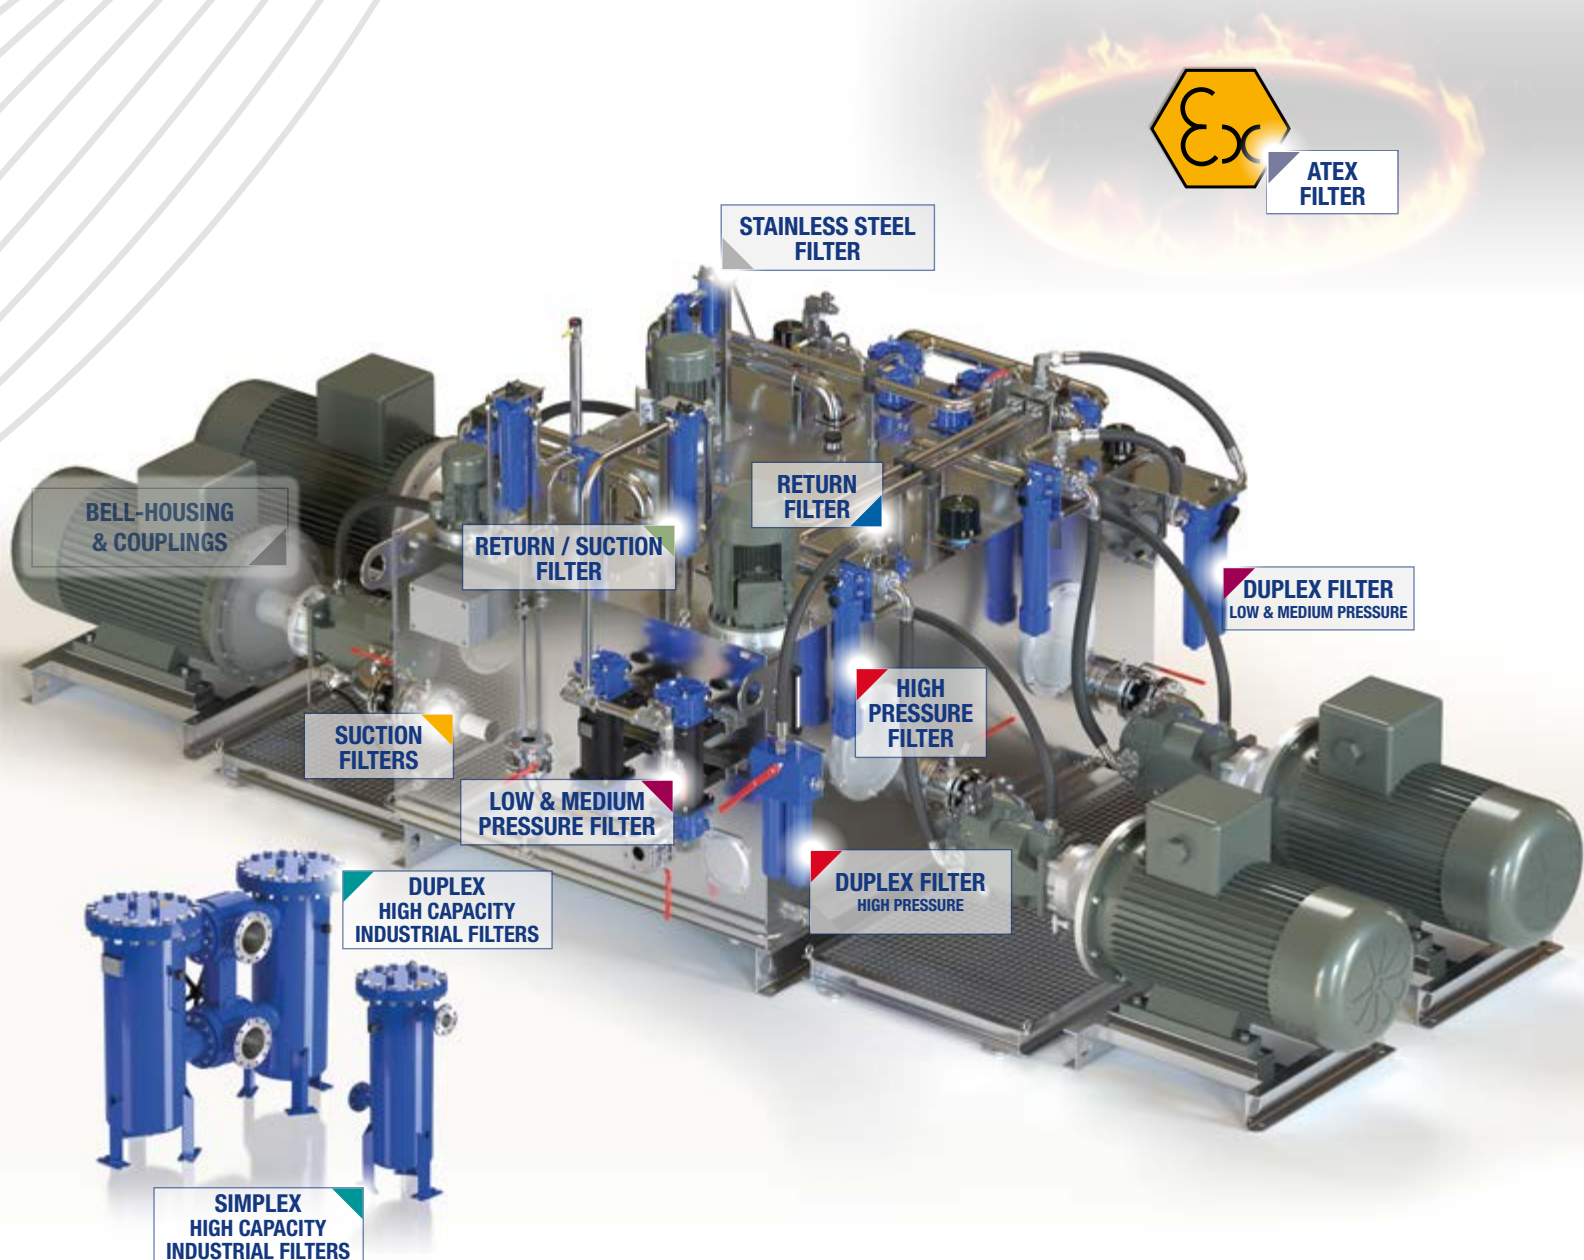
The MP Filtri Selection Tool software program is easy to use with a flexible fast design method and provides improved layout formats with full descriptions.

The web-based tool is available at MP Filtri website at following link:
<https://www.mpfiltri.com/tools/>

The related, complete user guide is available as Manual and downloadable from the "Download" section of MP Filtri website, as well as scanning the following QR code



Scan or click me!



Low-pressure filtration units for lubrication systems in industrial applications.

Designed specifically for lubrication circuits in industrial settings - such as for instance refineries and both onshore and offshore installations - the MLPX filter range offers high-efficiency filtration with a large filter surface area.

Available in two series: MLPX, featuring a single filter unit, and MLDX, featuring a switchable duplex filter. Both series can include one or more filter elements per filter, according to the selected size.

Advantages for installation:

- **Compact design for efficient space usage and simplified installation process**
- **Wide selection of flange connections and flow rates**
- **Certified components readily available on the market for faster replacement and procurement**
- **Compliant with international design and construction standards**

Advantages for operation:

- **Significant reduction of contamination in the lubrication circuit**
- **Enhanced stability and sealing of the filter element, even during transport**
- **Multiple filter elements minimize pressure drop and maximize dirt-holding capacity**
- **Filter element equipped with a practical handle for easier replacement**
- **Dual-side ports for indicator installation, offering flexible positioning to suit the user's needs**

High capacity industrial filters



Filter sizing and corrective factors	page 490
MLPX / MLPC	493
MLDX / MLDC	507
INDICATORS	785

FILTER SIZING Calculation

THE CORRECT FILTER SIZING HAS TO BE BASED ON THE TOTAL PRESSURE DROP DEPENDING ON THE APPLICATION.

The pressure drop calculation is performed by adding together the value of the housing with the value of the filter element. The pressure drop Δp_c of the housing is proportional to the fluid density (kg/dm^3 / lb/ft^3). The filter element pressure drop Δp_e is proportional to its viscosity (mm^2/s / SUS), the corrective factor Y have to be used in case of an oil viscosity different than $30 \text{ mm}^2/\text{s}$ (cSt) / 150 SUS .

Sizing data for single filter element, head at top

Δp_c = Filter housing pressure drop [bar / psi]

Δp_e = Filter element pressure drop [bar / psi]

Y = Corrective factor Y (see correspondent table), depending on the filter type, on the filter element size, on the filter element length and on the filter media

Q = flow rate (l/min - gpm)

V_1 reference oil viscosity = $30 \text{ mm}^2/\text{s}$ (cSt) / 150 SUS

V_2 = operating oil viscosity in mm^2/s (cSt) / SUS

Filter element pressure drop calculation with an oil viscosity different than $30 \text{ mm}^2/\text{s}$ (cSt) / 150 SUS

International system:

$$\Delta p_e = Y : 1000 \times Q \times (V_2:V_1)$$

Imperial system:

$$\Delta p_e = Y : 17.2 \times Q \times (V_2:V_1)$$

$$\Delta p_{\text{Tot.}} = \Delta p_c + \Delta p_e$$

Verification formula

$$\Delta p_{\text{Tot.}} \leq \Delta p_{\text{max allowed}}$$

Maximum total pressure drop (Δp_{max}) allowed by a new and clean filter

Filter family	Δp_{max}	
	[bar]	[psi]
High Capacity Industrial filters	0.70 bar	10.15 psi

Filter pressure drop calculation example

Application data:

Selected filter: **MLPX 631 length 20**

Selected filter element: **LPX 630 length 20**

Selected filtration rating: **40 μm** absolute filtration with microfibre

Pressure P_{max} = **16 bar / 232 psi**

Flow rate Q = **600 l/min / 158.5 gpm**


Viscosity V_2 = **46 mm^2/s (cSt) / 216 SUS**

Oil density = **0.86 kg/dm^3 / 53.68 lb/ft^3**

Calculation:

Δp_c = **0.03 bar / 0.43 psi** (see graphic below)

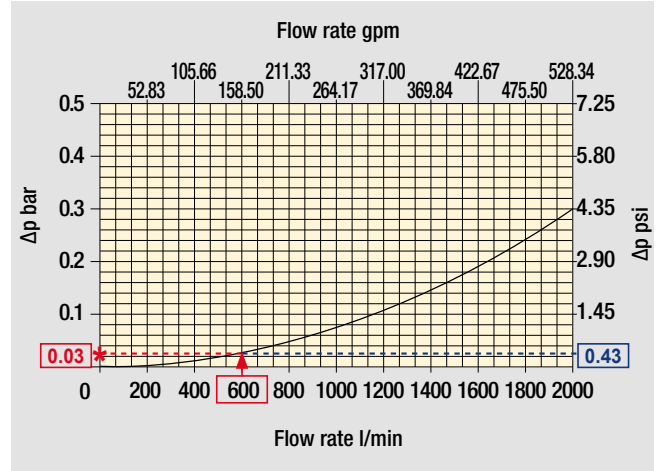MLPX 631 - Length 20



Filter housings Δp pressure drop.

The curves are plotted using mineral oil with density of 0.86 kg/dm^3 in compliance with ISO 3968. Δp varies proportionally with density.

Filter element		Absolute filtration Filter Elem. Δp Series: D					Nominal filtration Filter Elem. Δp Series: D
		A0003	A0006	A0010	A0025	A0040	M0060 - M0090 - M00250
LPX 630 →	10	3.10	2.48	1.32	0.92	0.83	0.09
	20	2.06	1.92	0.82	0.38	0.33	0.08

$$\Delta p_e = (0.33 : 1000) \times 600 \times (46 : 30) = 0.30 \text{ bar}$$

$$\Delta p_e = (0.33 : 17.2) \times 158.5 \times (216 : 150) = 4.38 \text{ psi}$$

$$\Delta p_{\text{Tot.}} = 0.03 + 0.30 = 0.33 \text{ bar}$$

$$\Delta p_{\text{Tot.}} = 0.43 + 4.38 = 4.81 \text{ psi}$$

The selection is correct because the total pressure drop value is inside the admissible range for high capacity industrial filters. In case the max allowed total pressure drop is not verified, it is necessary to repeat the calculation changing the filter and/or filter element length/size.

Filter element		Absolute filtration Filter element ΔP Series: D					Nominal filtration Filter Element ΔP Series: D
Type	Length	A0003	A0006	A0010	A0025	A0040	M0060 - M0090 - M0250
LPX 630	10	3.10	2.48	1.32	0.92	0.83	0.09
	20	2.06	1.92	0.82	0.38	0.33	0.08
MRC 850	20	0.37	0.26	0.23	0.11	0.08	0.03
	30	0.27	0.18	0.17	0.05	0.04	0.02
	40	0.23	0.16	0.13	0.04	0.03	0.02

Corrective factor Y to be used for the filter element pressure drop calculation. The values depend to the filter size and length and to the filter media.

Reference oil viscosity 30 mm²/s



THE **X** CONCEPT FOR OUR FILTERS

Designed and manufactured in compliance with the PED regulation (Europe only), our components feature practical solutions such as the filter element with handle, designed to simplify replacement. The positioning of the filter element has been engineered to ensure stability in its housing and sealing integrity, even during transport.

MLPX series

with **MYCLEAN** LPX Filter Element



● **Protects the machine from improper use of non-original products.**

● **Safety of constant quality protection & reliability**

With exclusive filter element you are sure that only MP Filtri filter elements can be used, ensuring the best cleaning level of the oil due to the use of originals filter elements.

The products identified as MLPX are protected by:

- Italian Patent n° 102014902261205
- Canadian Patent n° 2,937,258
- European Patent n° 3 124 092 B1
- US Patent n° 20170030384 A1

Protect the performance of your system with MYclean.

Quality and efficiency are fundamental for MP Filtri:

this exclusive new filter element possesses polygon shape geometry and specific seal that ensures only original spare parts can be used - ensuring correct operation and higher system reliability.

MLPX / MLPC series

Maximum working pressure up to 1.6 MPa (16 bar) - Flow rate up to 12000 l/min



MLPX - MLPC GENERAL INFORMATION

Description

High capacity industrial filters - simplex type

Maximum working pressure up to 1.6 MPa (16 bar)

Flow rate up to 12000 l/min

MLPX / MLPC is a range of low pressure simplex filters with large filtration surface mainly suitable for high capacity applications in industrial lubrication systems.

Multiple filter elements can be fitted in parallel into the housing to reduce the pressure drop caused by the filter media and to increase the dust holding capacity of the filter.

They are directly connected to the lines of the system through the hydraulic flanges.

Available features:

- Flanged connections EN 1092-1 up to DN200 (MLPX) - DN100 (MLPC), for a maximum flow rate of 12000 l/min
- Base-mounting design for ease of the replacement of the filter elements
- Single filter elements
- In to Out filtration, to reduce the risk of residual contamination going into the system during the maintenance works
- Fine filtration rating, to get a good cleanliness level into the system
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance works
- Visual, electrical and electronic differential pressure clogging indicators
- MYclean interface connection for the filter element, to protect the product against non-original spare parts (only for MLPX series)

Common applications:

- Lubrication systems
- Off-line filtration of reservoirs
- Filtration systems

Technical data

Filter housing materials

- Body and cover: blue-painted carbon steel
- Fasteners: galvanized steel
- Indicator block, plugs: phosphatized steel
- Nameplate: plastic

Pressure

- Test pressure: 2.4 MPa (24 bar)
- Min. Burst pressure: 4.8 MPa (48 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 1.6 MPa (16 bar)

All MLPX and MLPC filters are 100% pressure-tested

Bypass valve

- Opening pressure:
0.35 MPa (3.5 bar) $\pm 10\%$ (MLPX series)
0.175 MPa (1.75 bar) $\pm 10\%$ (MLPC series)

Filter element features

Filter MLPX	Filter element LPX		
MLPC	MRC		
Δp Element type			
Element media	Construction	Δp Series	Δp
A - Microfiber	Standard	D	10 bar
M - Wire mesh	Standard	D	10 bar
Please see ordering code tables to check element Δp series availability based on filter features.			
Flow direction through the filter element:			
From IN to OUT			

Seals

- Standard NBR series A

Temperature

From -10 °C to +100 °C

Note

MLPX and MLPC filters are equipped with slotted mounting brackets, designed to be bolted to the foundation.

Weights [kg] and volumes [dm³]

Filter series	Length	Connection nom. dia. [DN]	Weights [kg]	Volumes [dm ³]
MLPX 631	10	65	90	26
	20	80	100	42
	20	100	115	43
MLPC 851	20	80	79	48
	20	100	82	50
	30	80	81	63
	30	100	84	65
	40	80	83	76
	40	100	86	78
MLPX 633	20	125	265	153
MLPX 634	20	150	345	215
MLPX 635	20	200	425	270

Flow rates [l/min]

Filter element design - D Series							
Filter series	Length	A0003	A0006	A0010	A0025	A0040	M0060 M0090 M0250
MLPX 631	10	225	280	516	720	788	2467
	20	336	360	797	1438	1568	2575
MLPC 851	20	1613	2050	2204	3034	3307	3832
	30	2003	2504	2571	3611	3720	3948
	40	2204	2641	2860	3832	3832	3948
MLPX 633	20	1013	1086	2459	4697	5193	9574
MLPX 634	20	1344	1440	3183	5719	6227	10122
MLPX 635	20	1679	1798	3967	7081	7699	12383

Maximum flow rate for a complete delivery filter with a pressure drop $\Delta p = 0.7$ bar.







The reference fluid has a kinematic viscosity of 30 mm²/s (cSt) and a density of 0.86 kg/dm³.

For different pressure drop or fluid viscosity we recommend to use our selection software available on www.mpfiltri.com.

Please, contact our Sales Department for further additional information.

Filter series	00 - without bypass	17 - with bypass 1.75 bar	35 - with bypass 3.5 bar
MLPX 631-633-634-635	-	-	•
MLPC 851	•	•	-

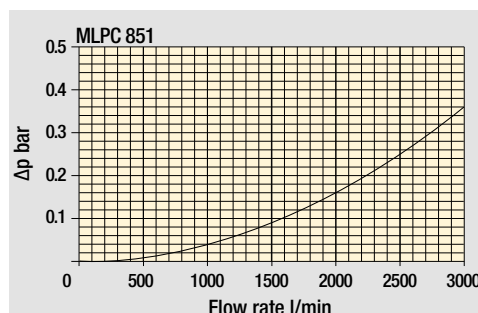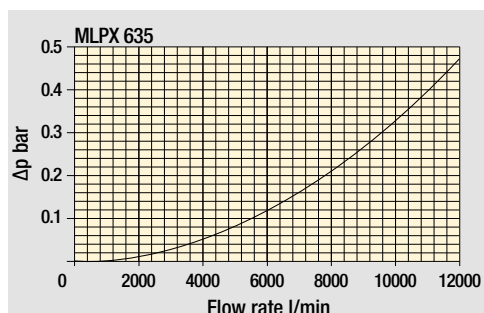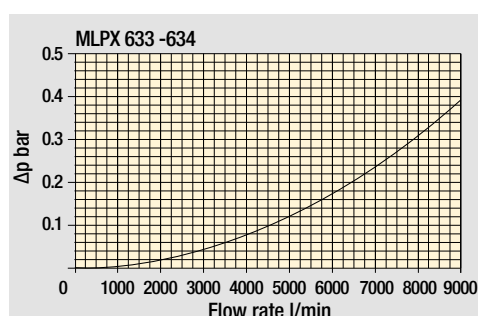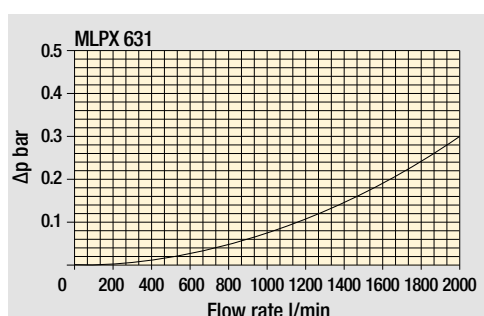Hydraulic diagram



Pressure drop

Filter housings
 Δp pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm³ in compliance with ISO 3968. Δp varies proportionally with density.

MLPX MLPX631 - MLPX633 - MLPX634 - MLPX635

Designation & Ordering code

COMPLETE FILTER

Series MLPX	Filter featuring MYCLEAN Filter Element	Example :	MLPX	633	20	A0010	D	A	35	FD125	0	6T	NN	P01	NN	
Filter size Nr. of elements LPX 630																
MLPX 631	1															
MLPX 633	3															
MLPX 634	4															
MLPX 635	5															
Length		Filter size														
		631	633	634	635											
10		•	-	-	-											
20		•	•	•	•											
Filtration rating (filter media)																
A0003	Inorganic microfiber	3 µm														
A0006	Inorganic microfiber	6 µm														
A0010	Inorganic microfiber	10 µm														
A0025	Inorganic microfiber	25 µm														
A0040	Inorganic microfiber	40 µm														
M0060	Wire mesh	60 µm														
M0090	Wire mesh	90 µm														
M0250	Wire mesh	250 µm														
Element Δp																
D		10 bar														
Seals																
A		NBR														
Bypass																
35		With bypass 3.5 bar														
Connections																
		631	633	634	635											
		10	20	20	20	20										
							size									
							length									
FD065	Flange EN 1092-1 / 01A / DN 65 / PN 16	•	-	-	-	-										
FD080	Flange EN 1092-1 / 01A / DN 80 / PN 16	-	•	-	-	-										
FD100	Flange EN 1092-1 / 01A / DN 100 / PN 16	-	•	-	-	-										
FD125	Flange EN 1092-1 / 01A / DN 125 / PN 16	-	-	•	-	-										
FD150	Flange EN 1092-1 / 01A / DN 150 / PN 16	-	-	-	•	-										
FD200	Flange EN 1092-1 / 01A / DN 200 / PN 16	-	-	-	-	•										
Additional connections																
0		Without additional connections														
Connections for clogging indicators																
6T		With both side indicator connection, with metal plugs														
Additional features																
NN		Without additional features														
Execution																
P01		Standard catalogue item														
Certificates																
NN		None														

CLOGGING INDICATORS

See page 785

DEA	Electrical differential pressure indicator
DEM	Electrical differential pressure indicator
DLA	Electrical / visual differential pressure indicator
DLE	Electrical / visual differential pressure indicator

DTA	Electronic differential pressure indicator
DTI	I-O Link electronic differential pressure indicator
DVA	Visual differential pressure indicator
DVM	Visual differential pressure indicator


PLUGS

See page 807


T2	Plug
-----------	------

FILTER ELEMENT	
Series	Config. example: LPX 630 20 A0010 D A 35 NN P01 NN
LPX Filter element with MYCLEAN feature	
Element size	630
Element length	10 20
Filtration rating (filter media)	
A0003 Inorganic microfiber	3 µm
A0006 Inorganic microfiber	6 µm
A0010 Inorganic microfiber	10 µm
A0025 Inorganic microfiber	25 µm
A0040 Inorganic microfiber	40 µm
M0060 Wire mesh	60 µm
M0090 Wire mesh	90 µm
M0250 Wire mesh	250 µm
Element Δp	D 10 bar
Seals	A NBR
Bypass	35 With bypass 3.5 bar
Addictional features	NN Without addictional features
Execution	P01 Standard catalogue item
Certificates	NN None

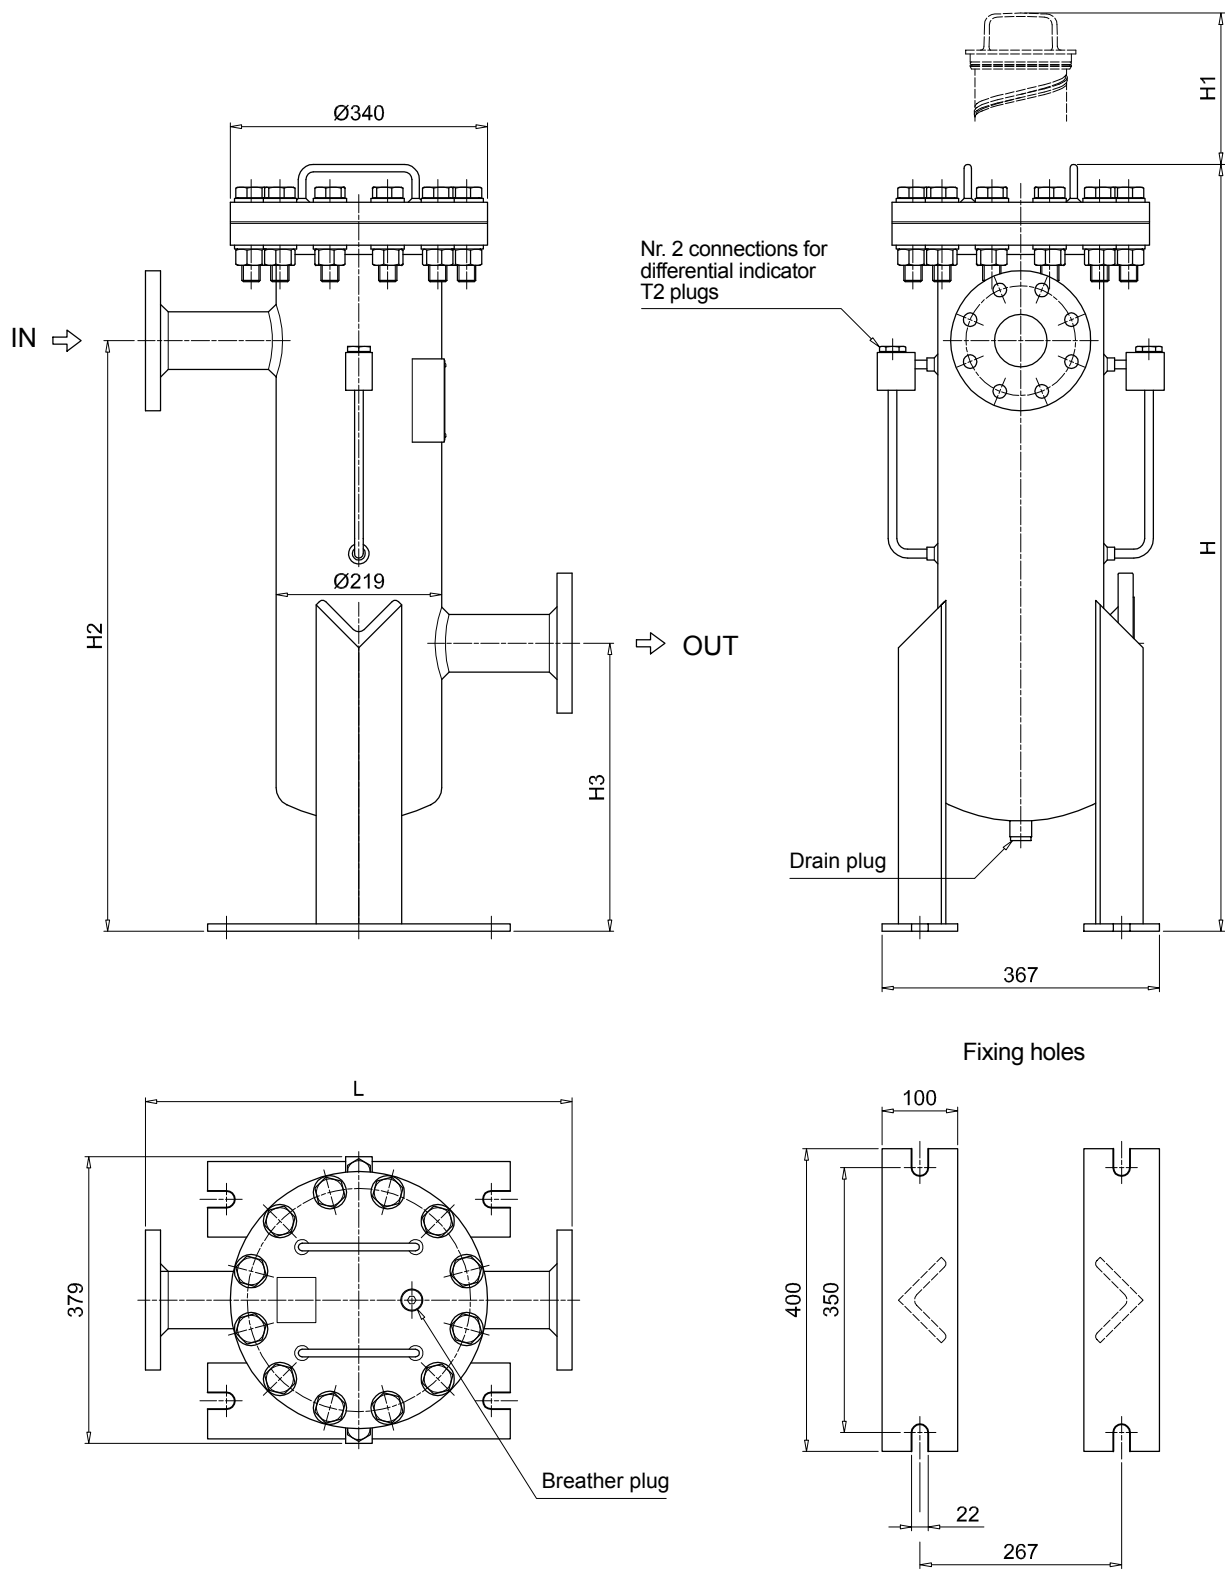MLPX631



Filter length	Connections	H [mm]	H1 [mm]	H2 [mm]	H3 [mm]	L [mm]
10	DN 65	1018	435	800	400	564
20	DN 80	1430	845	1210	510	584
20	DN 100	1430	845	1210	510	600

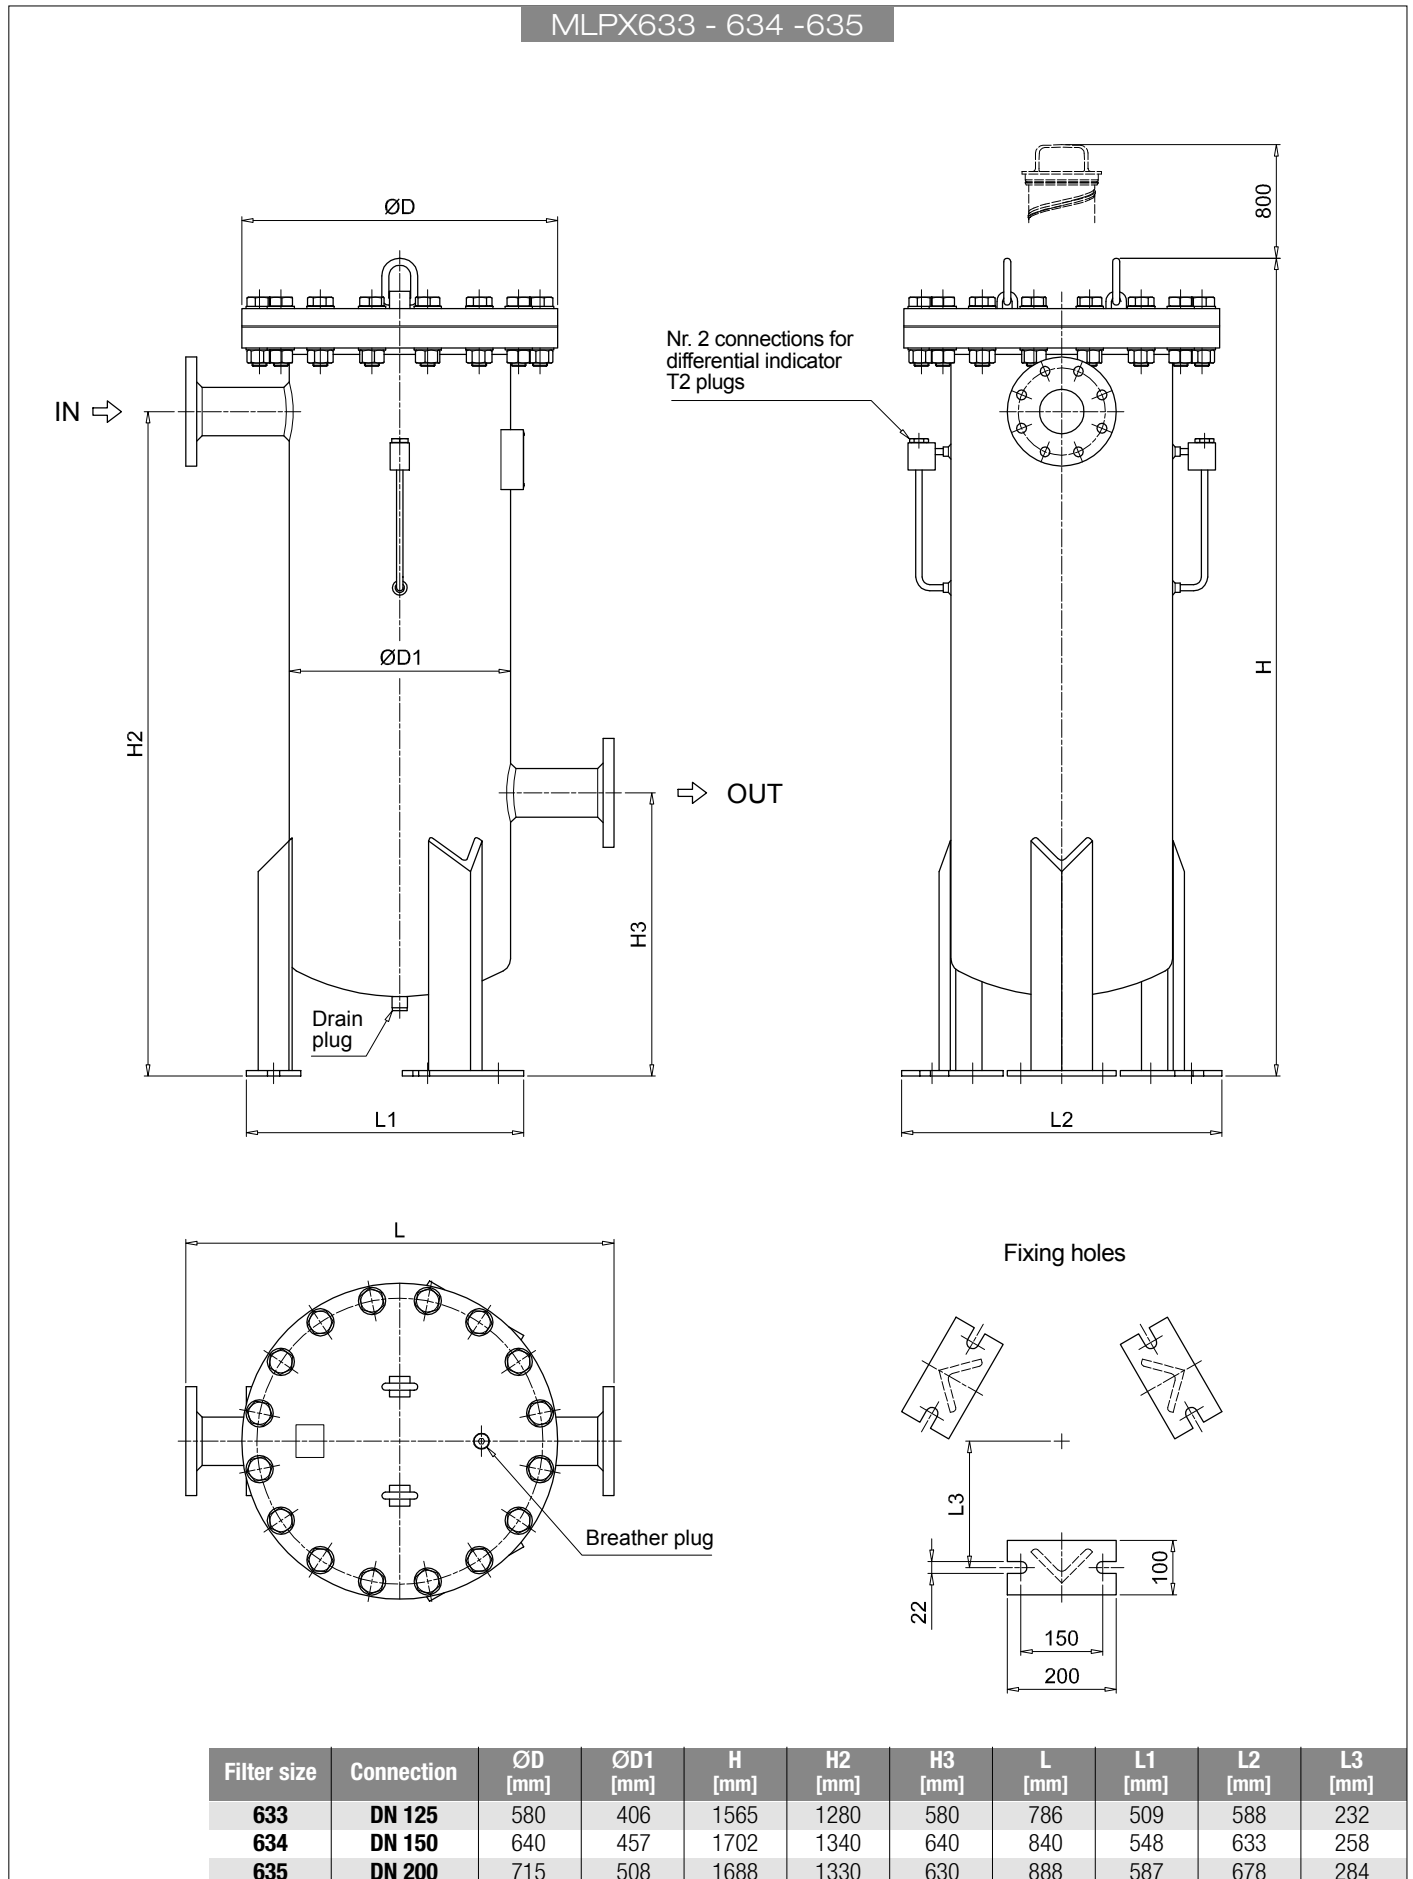

MLPC MLPC851

Designation & Ordering code

COMPLETE FILTER

Series	Example :	MLPC	851	20	A0010	D	A	17	FD100	0	6T	NN	P01	NN
Filter size	Nr. of elements MRC 850													
851	1													
Length														
20														
30														
40														
Filtration rating (filter media)														
A0003	Inorganic microfiber	3 µm												
A0006	Inorganic microfiber	6 µm												
A0010	Inorganic microfiber	10 µm												
A0025	Inorganic microfiber	25 µm												
A0040	Inorganic microfiber	40 µm												
M0060	Wire mesh	60 µm												
M0090	Wire mesh	90 µm												
M0250	Wire mesh	250 µm												
Element Δp														
D	10 bar													
Seals														
A	NBR													
Bypass														
00	Without bypass													
17	With bypass 1.75 bar													
Connections														
FD080	Flange EN 1092-1 / 01A / DN 80 / PN 16													
FD100	Flange EN 1092-1 / 01A / DN 100 / PN 16													
Additional connections														
0	Without additional connections													
Connections for clogging indicators														
6T	With both side indicator connection, with metal plugs													
Additional features														
NN	Without additional features													
Execution														
P01	Standard catalogue item													
Certificates														
NN	None													

CLOGGING INDICATORS

See page 785

DEA	Electrical differential pressure indicator
DEM	Electrical differential pressure indicator
DLA	Electrical / visual differential pressure indicator
DLE	Electrical / visual differential pressure indicator


DTA	Electronic differential pressure indicator
DTI	I-O Link electronic differential pressure indicator
DVA	Visual differential pressure indicator
DVM	Visual differential pressure indicator

PLUGS

See page 807


T2	Plug
-----------	------

FILTER ELEMENT	
Element series and size MRC	Config. example: MRC 850 20 A0010 D A 00 NN P01 NN
Element size 850	
Element length 20 30 40	
Filtration rating (filter media)	
A0003 Inorganic microfiber 3 µm	
A0006 Inorganic microfiber 6 µm	
A0010 Inorganic microfiber 10 µm	
A0025 Inorganic microfiber 25 µm	
A0040 Inorganic microfiber 40 µm	
M0060 Wire mesh 60 µm	
M0090 Wire mesh 90 µm	
M0250 Wire mesh 250 µm	
Element Δp D 10 bar	
Seals A NBR	
Bypass 00 Without bypass	
Additional features NN Without additional features	
Execution P01 Standard catalogue item	
Certificates NN None	

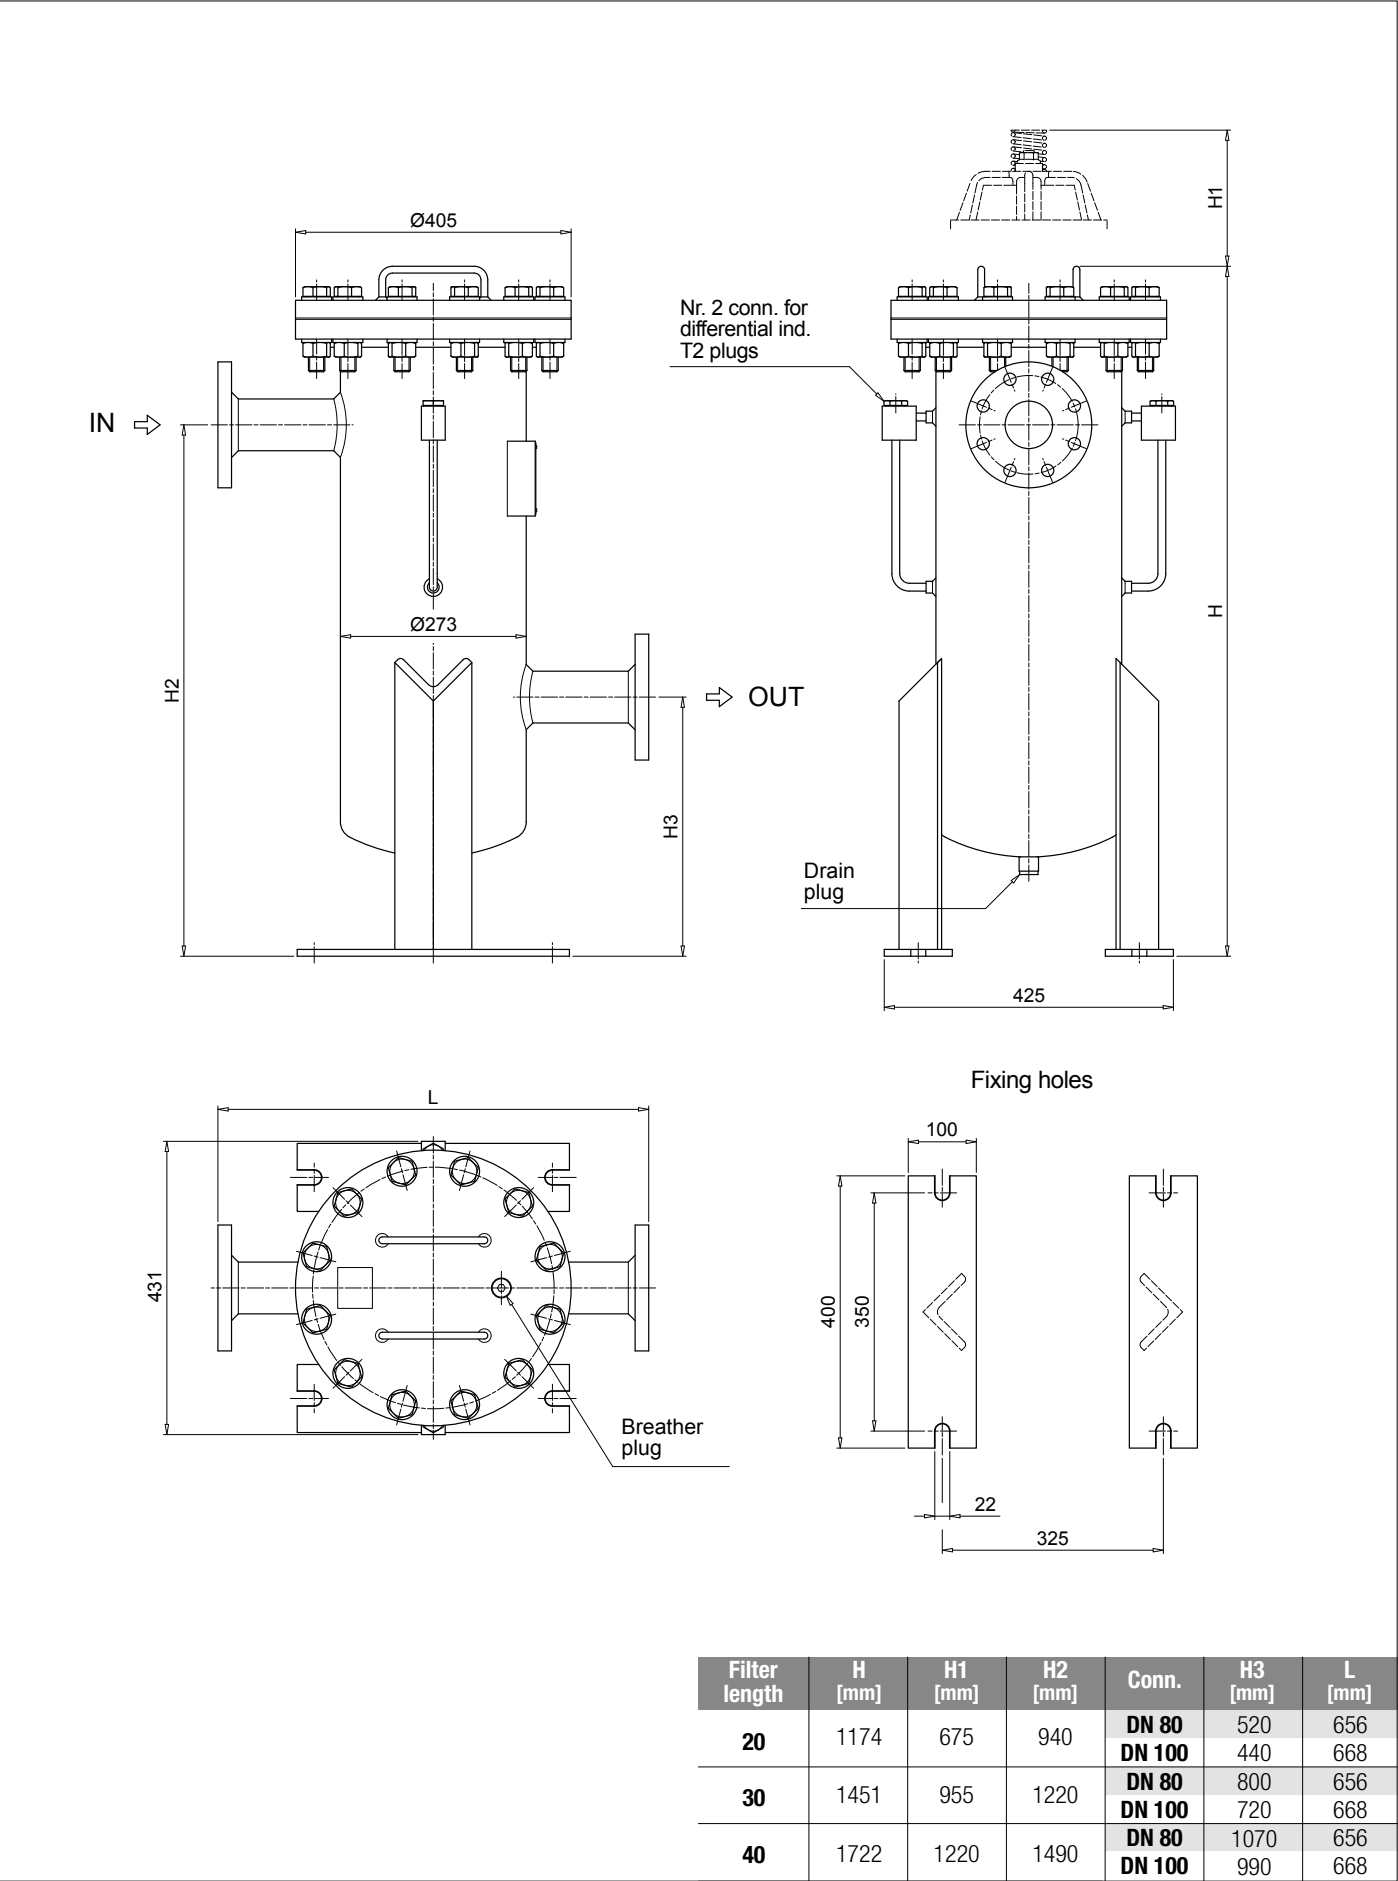


Order number for spare parts

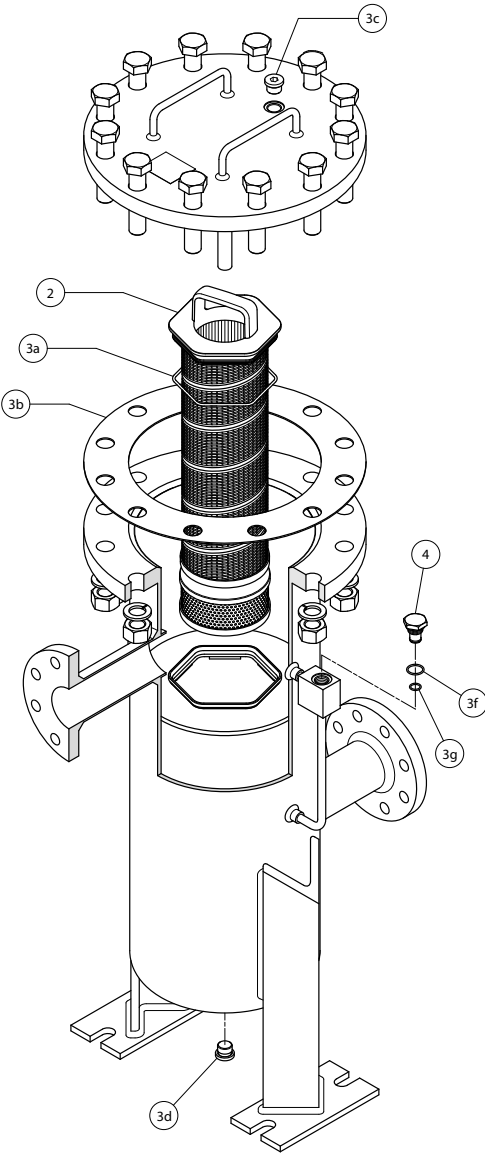MLPX 631 - 633 - 634 - 635



Item:	2	Q.ty: 1 pc. 3 (3a ÷ 3f)	Q.ty: 2 pcs. 4
Filter series	Filter element	Seal Kit code number NBR	Indicator connection plug NBR
MLPX631	See order table	AK021000684	T2H
MLPX633		AK021000685	T2H
MLPX634		AK021000686	T2H
MLPX635		AK021000687	T2H

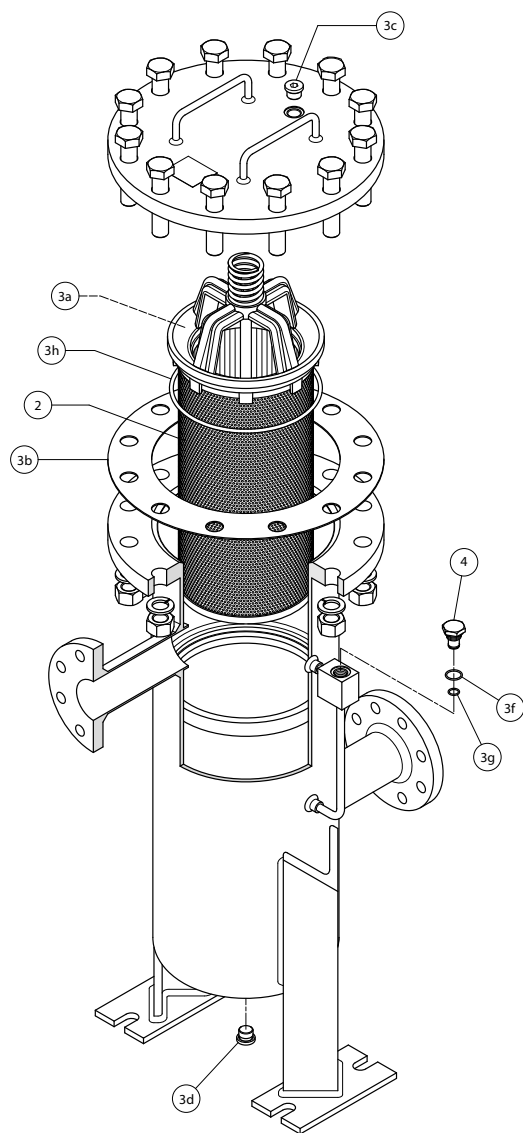MLPC 851



Item:	Q.ty: 1 pc. 2	Q.ty: 1 pc. 3 (3a ÷ 3f)	Q.ty: 2 pcs. 4
Filter series	Filter element	Seal Kit code number NBR	Indicator connection plug NBR
MLPC851	See order table	AK021000786	T2H

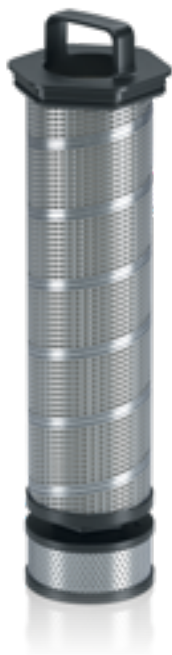


THE **X** CONCEPT FOR OUR FILTERS

Designed and manufactured in compliance with the PED regulation (Europe only), our components feature practical solutions such as the filter element with handle, designed to simplify replacement. The positioning of the filter element has been engineered to ensure stability in its housing and sealing integrity, even during transport.

MLDX series

with **MYCLEAN** LPX Filter Element



- **Protects the machine from improper use of non-original products.**
- **Safety of constant quality protection & reliability**

With exclusive filter element you are sure that only MP Filtri filter elements can be used, ensuring the best cleaning level of the oil due to the use of originals filter elements.

The products identified as MLDX are protected by:

- Italian Patent n° 102014902261205
- Canadian Patent n° 2,937,258
- European Patent n° 3 124 092 B1
- US Patent n° 20170030384 A1

Protect the performance of your system with MYclean.

Quality and efficiency are fundamental for MP Filtri:

this exclusive new filter element possesses polygon shape geometry and specific seal that ensures only original spare parts can be used - ensuring correct operation and higher system reliability.

MLDX / MLDC series

Maximum working pressure up to 1.6 MPa (16 bar) - Flow rate up to 8000 l/min



Description

Technical data

High capacity industrial filters - duplex type

Maximum working pressure up to 1.6 MPa (16 bar)

Flow rate up to 8000 l/min

MLDX/MLDC is a range of versatile low pressure, high capacity duplex filters with integrated changeover function operated by a single-lever or a hand-wheel to allow the filter element replacement without the system shut-down, mainly suitable for high capacity applications in industrial lubrication systems.

Multiple filter elements can be fitted in parallel into the housing to reduce the pressure drop caused by the filter media and to increase the dust holding capacity of the filter.

They are directly connected to the lines of the system through the hydraulic flanges.

Available features:

- Flanged connections EN 1092-1 up to DN200 (MLDX) - DN100 (MLDC), for a maximum flow rate of 8000 l/min
- Base-mounting design for ease of the replacement of the filter elements
- Multiple filter elements, for increased dust-holding capacity
- In to Out filtration, to reduce the risk of residual contamination going into the system during the maintenance works
- Fine filtration rating, to get a good cleanliness level into the system
- Balancing valve, to equalize the housing pressure before the switch
- Bypass valve, to relieve excessive pressure drop across the filter media
- Vent ports, to avoid air trapped into the filter going into the system
- Drain ports, to remove the fluid from the housing prior the maintenance works
- Visual, electrical and electronic differential pressure clogging indicators
- MYclean interface connection for the filter element, to protect the product against non-original spare parts (only for MLDX series)

Common applications:

- Lubrication systems
- Off-line filtration of reservoirs
- Filtration systems

Filter housing materials

- Body and cover: blue-painted carbon steel
- Fasteners: galvanized steel
- Indicator block, plugs: phosphatized steel
- Balancing valve: nickel-plated brass
- Nameplate: plastic

Pressure

- Test pressure: 2.4 MPa (24 bar)
- Min. Burst pressure: 4.8 MPa (48 bar)
- Pulse pressure fatigue test: 1 000 000 cycles with pressure from 0 to 1.6 MPa (16 bar)

100% testing: every MLDX and MLDC filter is individually inspected and tested

Bypass valve

- Opening pressure:
0.35 MPa (3.5 bar) $\pm 10\%$ (MLDX series)
0.175 MPa (1.75 bar) $\pm 10\%$ (MLDC series)

Filter element features

Filter		Filter element	
MLDX		LPX	
MLDC		MRC	
Δp Element type			
Element media	Construction	Δp Series	Δp
A - Microfiber	Standard	D	10 bar
M - Wire mesh	Standard	D	10 bar
Please see ordering code tables to check element Δp series availability based on filter features.			
Flow direction through the filter element:			
From IN to OUT			

Seals

- Standard NBR series A

Temperature

From -10 °C to +100 °C

Note

MLDX and MLDC filters are equipped with slotted mounting brackets, designed to be bolted to the foundation.

Weights [kg] and volumes [dm³]

Filter series	Length	Connection nom. dia. [DN]	Weights [kg]	Volumes [dm ³]
MLDX 631	10	65	240	54
	20	80	305	88
	20	100	370	91
MLDC 851	20	80	242	100
	20	100	308	106
	30	80	246	130
	30	100	312	136
	40	80	250	156
	40	100	316	162
MLDX 633	20	125	685	320
MLDX 634	20	150	1035	450
MLDX 635	20	200	1285	590

Flow rates [l/min]

Filter element design - D Series							
Filter series	Length	A0003	A0006	A0010	A0025	A0040	M0060 M0090 M0250
MLDX 631	10	222	275	487	651	702	1524
	20	327	349	708	1096	1159	1562
MLDC 851	20	1508	1860	1979	2581	2768	3116
	30	1823	2203	2253	2971	3043	3192
	40	1979	2303	2459	3116	3116	3192
MLDX 633	20	1005	1076	2358	4160	4512	7139
MLDX 634	20	1325	1417	2981	4871	5203	7426
MLDX 635	20	1645	1757	3608	5677	6024	8251



Maximum flow rate for a complete delivery filter with a pressure drop $\Delta p = 0.7$ bar.

The reference fluid has a kinematic viscosity of 30 mm²/s (cSt) and a density of 0.86 kg/dm³.





For different pressure drop or fluid viscosity we recommend to use our selection software available on www.mpfiltri.com.

Please, contact our Sales Department for further additional information.

Filter series	00 - without bypass	17 - with bypass 1.75 bar	35 - with bypass 3.5 bar
MLDX 631-633-634-635	-	-	•
MLDC 851	•	•	-

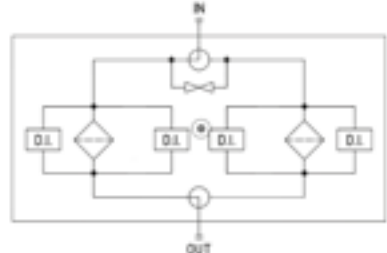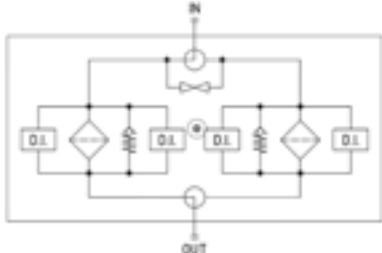Hydraulic diagram

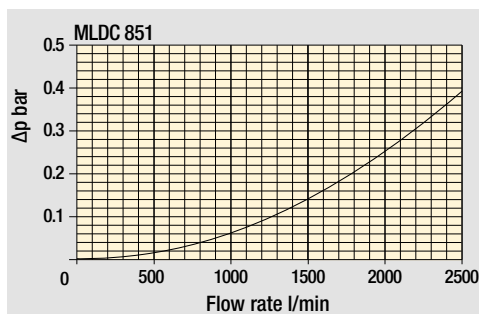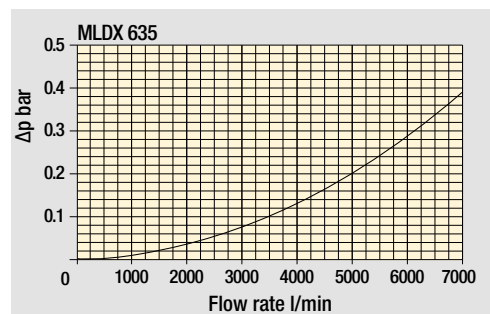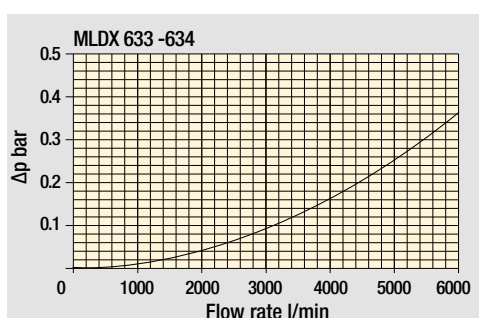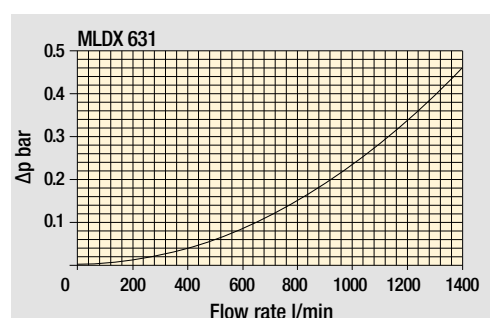

Pressure drop

Filter housings
 Δp pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm³ in compliance with ISO 3968. Δp varies proportionally with density.

MLDX MLDX631 - MLDX633 - MLDX634 - MLDX635

Designation & Ordering code

COMPLETE FILTER

Series	Example :	MLDX	633	20	A0010	D	A	35	FD125	0	6T	NN	P01	NN
MLDX	Filter featuring MYCLEAN Filter Element													
Filter size	Nr. of elements LPX 630													
MLDX 631	1 + 1													
MLDX 633	3 + 3													
MLDX 634	4 + 4													
MLDX 635	5 + 5													
Length	Filter size	631	633	634	635									
10		•	-	-	-									
20		•	•	•	•									
Filtration rating (filter media)														
A0003	Inorganic microfiber				3 µm									
A0006	Inorganic microfiber				6 µm									
A0010	Inorganic microfiber				10 µm									
A0025	Inorganic microfiber				25 µm									
A0040	Inorganic microfiber				40 µm									
M0060	Wire mesh				60 µm									
M0090	Wire mesh				90 µm									
M0250	Wire mesh				250 µm									
Element Δp														
D	10 bar													
Seals														
A	NBR													
Bypass														
35	With bypass 3.5 bar													
Connections		631	633	634	635	size								
		10	20	20	20	length								
FD065	Flange EN 1092-1 / 01A / DN 65 / PN 16	•	-	-	-									
FD080	Flange EN 1092-1 / 01A / DN 80 / PN 16	-	•	-	-									
FD100	Flange EN 1092-1 / 01A / DN 100 / PN 16	-	•	-	-									
FD125	Flange EN 1092-1 / 01A / DN 125 / PN 16	-	-	•	-									
FD150	Flange EN 1092-1 / 01A / DN 150 / PN 16	-	-	-	•									
FD200	Flange EN 1092-1 / 01A / DN 200 / PN 16	-	-	-	-	•								
Additional connections														
0	Without additional connections													
Connections for clogging indicators														
6T	With both side indicator connection, with metal plugs													
Additional features														
NN	Without additional features													
Execution														
P01	Standard catalogue item													
Certificates														
NN	None													

CLOGGING INDICATORS

See page 785

DEA	Electrical differential pressure indicator
DEM	Electrical differential pressure indicator
DLA	Electrical / visual differential pressure indicator
DLE	Electrical / visual differential pressure indicator


DTA	Electronic differential pressure indicator
DTI	I-O Link electronic differential pressure indicator
DVA	Visual differential pressure indicator
DVM	Visual differential pressure indicator

PLUGS


See page 807

T2	Plug
-----------	------


FILTER ELEMENT	
Series	Config. example: LPX 630 20 A0010 D A 35 NN P01 NN
LPX Filter element with MYCLEAN feature	
Element size	630
Element length	10 20
Filtration rating (filter media)	
A0003 Inorganic microfiber	3 µm
A0006 Inorganic microfiber	6 µm
A0010 Inorganic microfiber	10 µm
A0025 Inorganic microfiber	25 µm
A0040 Inorganic microfiber	40 µm
M0060 Wire mesh	60 µm
M0090 Wire mesh	90 µm
M0250 Wire mesh	250 µm
Element Δp	D 10 bar
Seals	A NBR
Bypass	35 With bypass 3.5 bar
Addictional features	NN Without addictional features
Execution	P01 Standard catalogue item
Certificates	NN None

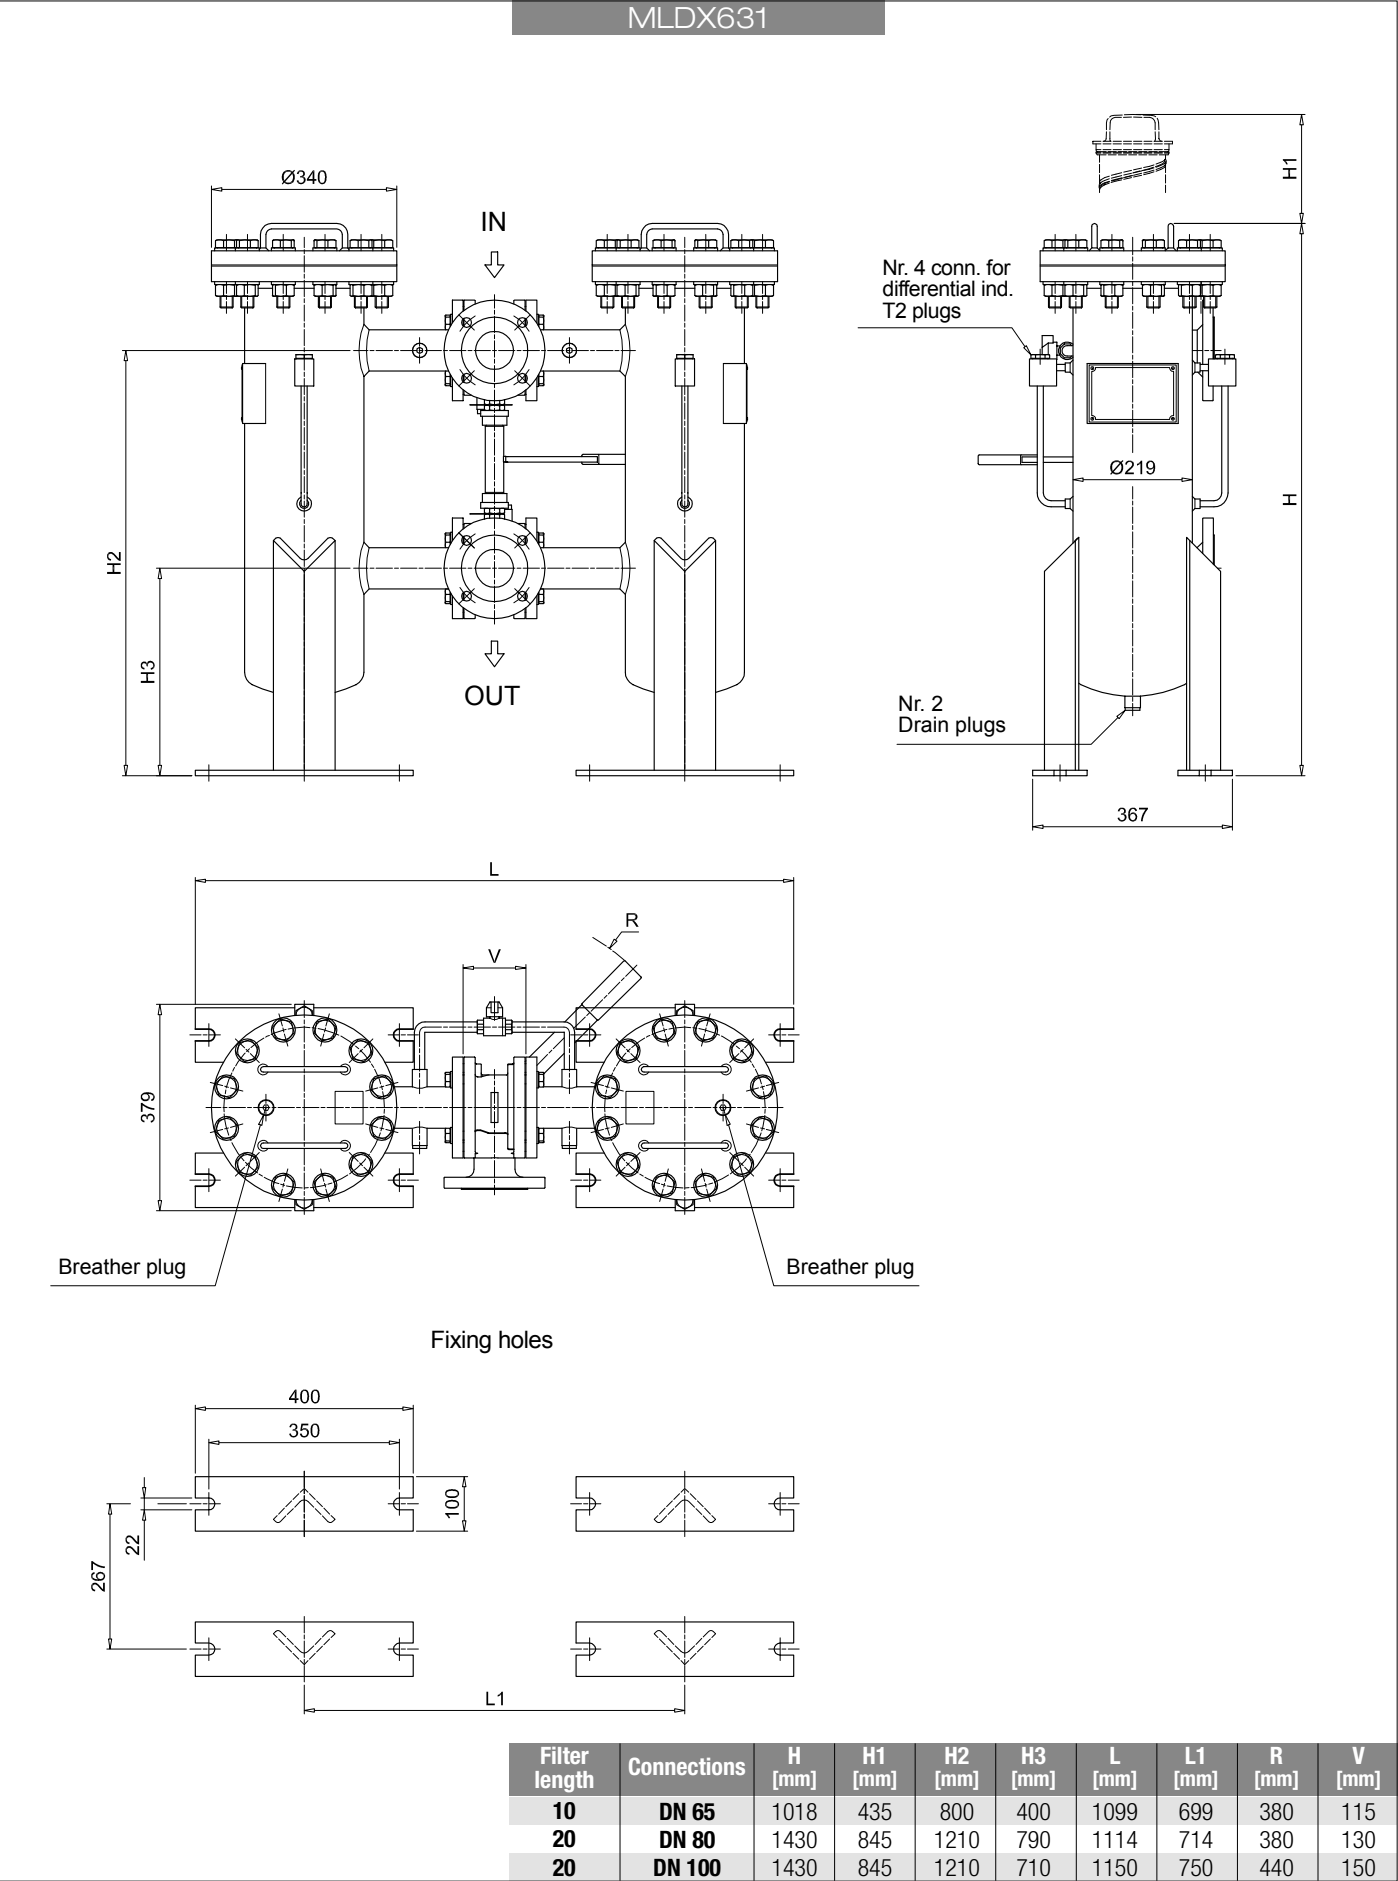

MLDX633 - 634

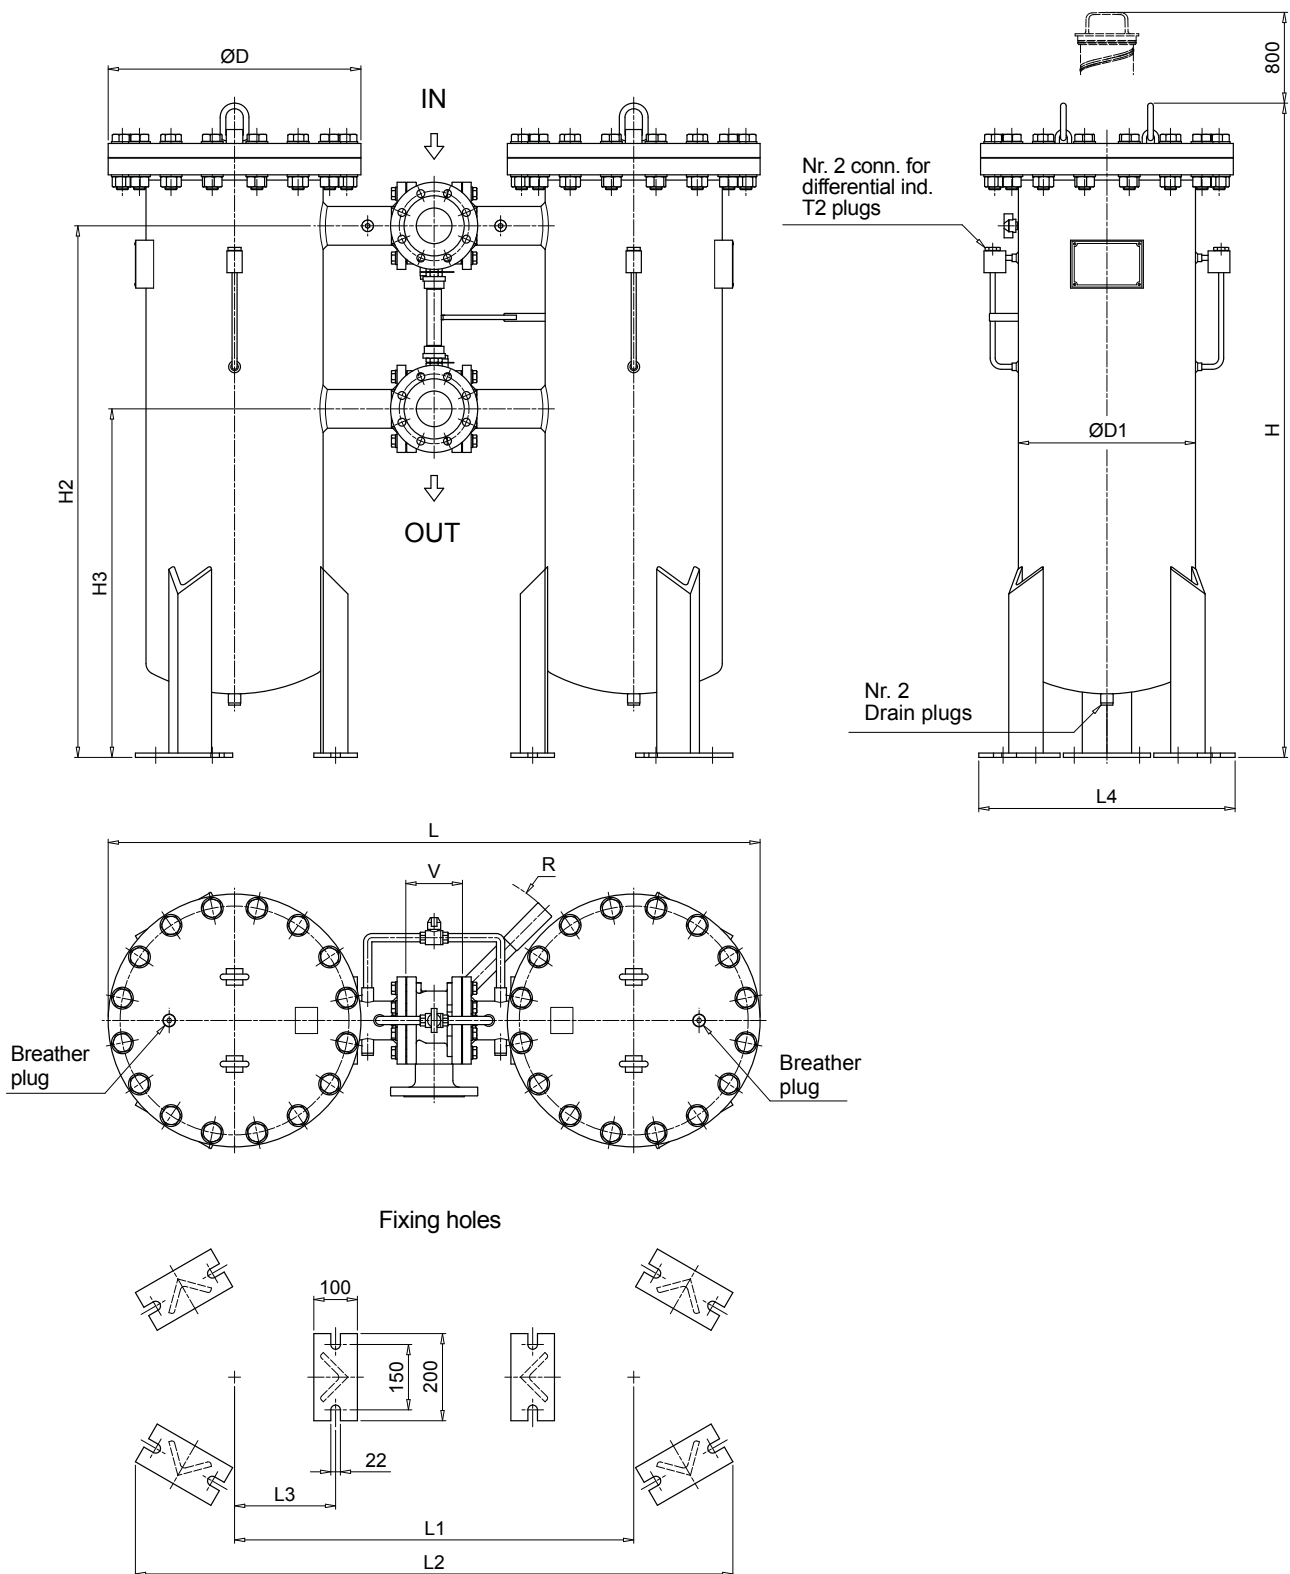

Filter size	Connection	$\varnothing D$ [mm]	$\varnothing D_1$ [mm]	H [mm]	H ₂ [mm]	H ₃ [mm]	L [mm]	L ₁ [mm]	L ₂ [mm]	L ₃ [mm]	L ₄ [mm]	R [mm]	V [mm]
633	DN 125	580	406	1563	1270	670	1551	971	1426	232	588	440	185
634	DN 150	640	457	1702	1340	640	1780	1140	1621	258	633	715	300

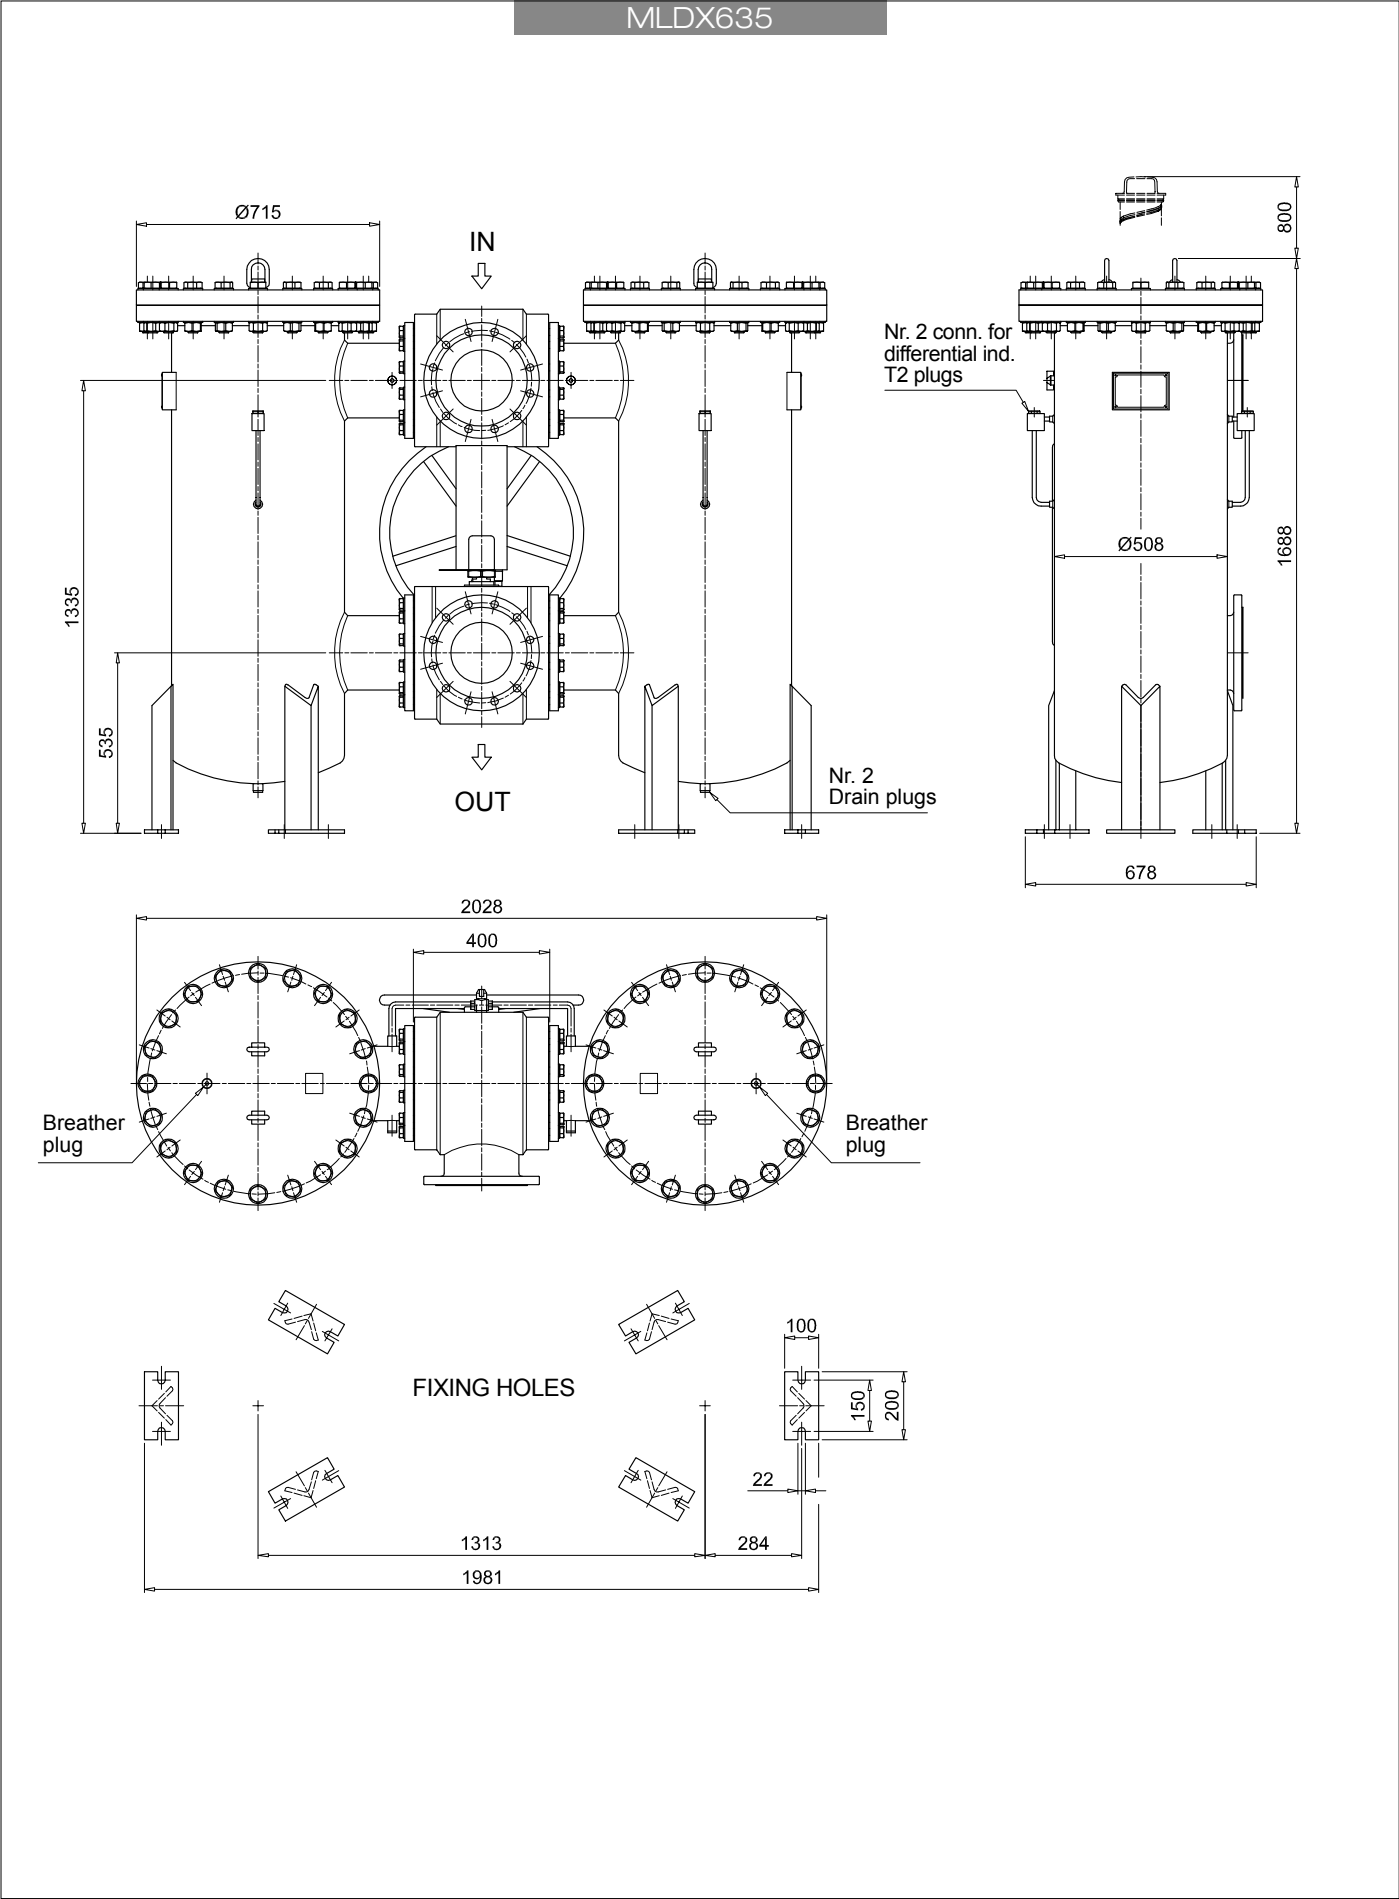

Designation & Ordering code

COMPLETE FILTER

Series	Example :	MLDC	851	20	A0010	D	A	17	FD080	0	6T	NN	P01	NN
Filter size	Nr. of elements MRC 850													
851	1 + 1													
Length														
20														
30														
40														
Filtration rating (filter media)														
A0003	Inorganic microfiber	3 µm												
A0006	Inorganic microfiber	6 µm												
A0010	Inorganic microfiber	10 µm												
A0025	Inorganic microfiber	25 µm												
A0040	Inorganic microfiber	40 µm												
M0060	Wire mesh	60 µm												
M0090	Wire mesh	90 µm												
M0250	Wire mesh	250 µm												
Element Δp														
D	10 bar													
Seals														
A	NBR													
Bypass														
00	Without bypass													
17	With bypass 1.75 bar													
Connections														
FD080	Flange EN 1092-1 / 01A / DN 80 / PN 16													
FD100	Flange EN 1092-1 / 01A / DN 100 / PN 16													
Additional connections														
0	Without additional connections													
Connections for clogging indicators														
6T	With both side indicator connection, with metal plugs													
Additional features														
NN	Without additional features													
Execution														
P01	Standard catalogue item													
Certificates														
NN	None													

CLOGGING INDICATORS

See page 785

DEA	Electrical differential pressure indicator
DEM	Electrical differential pressure indicator
DLA	Electrical / visual differential pressure indicator
DLE	Electrical / visual differential pressure indicator

DTA	Electronic differential pressure indicator
DTI	I-O Link electronic differential pressure indicator
DVA	Visual differential pressure indicator
DVM	Visual differential pressure indicator


PLUGS

See page 807

T2	Plug
-----------	------

FILTER ELEMENT	
Element series and size MRC	Config. example: MRC 850 20 A0010 D A 00 NN P01 NN
Element size 850	
Element length 20 30 40	
Filtration rating (filter media)	
A0003 Inorganic microfiber 3 µm	
A0006 Inorganic microfiber 6 µm	
A0010 Inorganic microfiber 10 µm	
A0025 Inorganic microfiber 25 µm	
A0040 Inorganic microfiber 40 µm	
M0060 Wire mesh 60 µm	
M0090 Wire mesh 90 µm	
M0250 Wire mesh 250 µm	
Element Δp D 10 bar	
Seals A NBR	
Bypass 00 Without bypass	
Additional features NN Without additional features	
Execution P01 Standard catalogue item	
Certificates NN None	

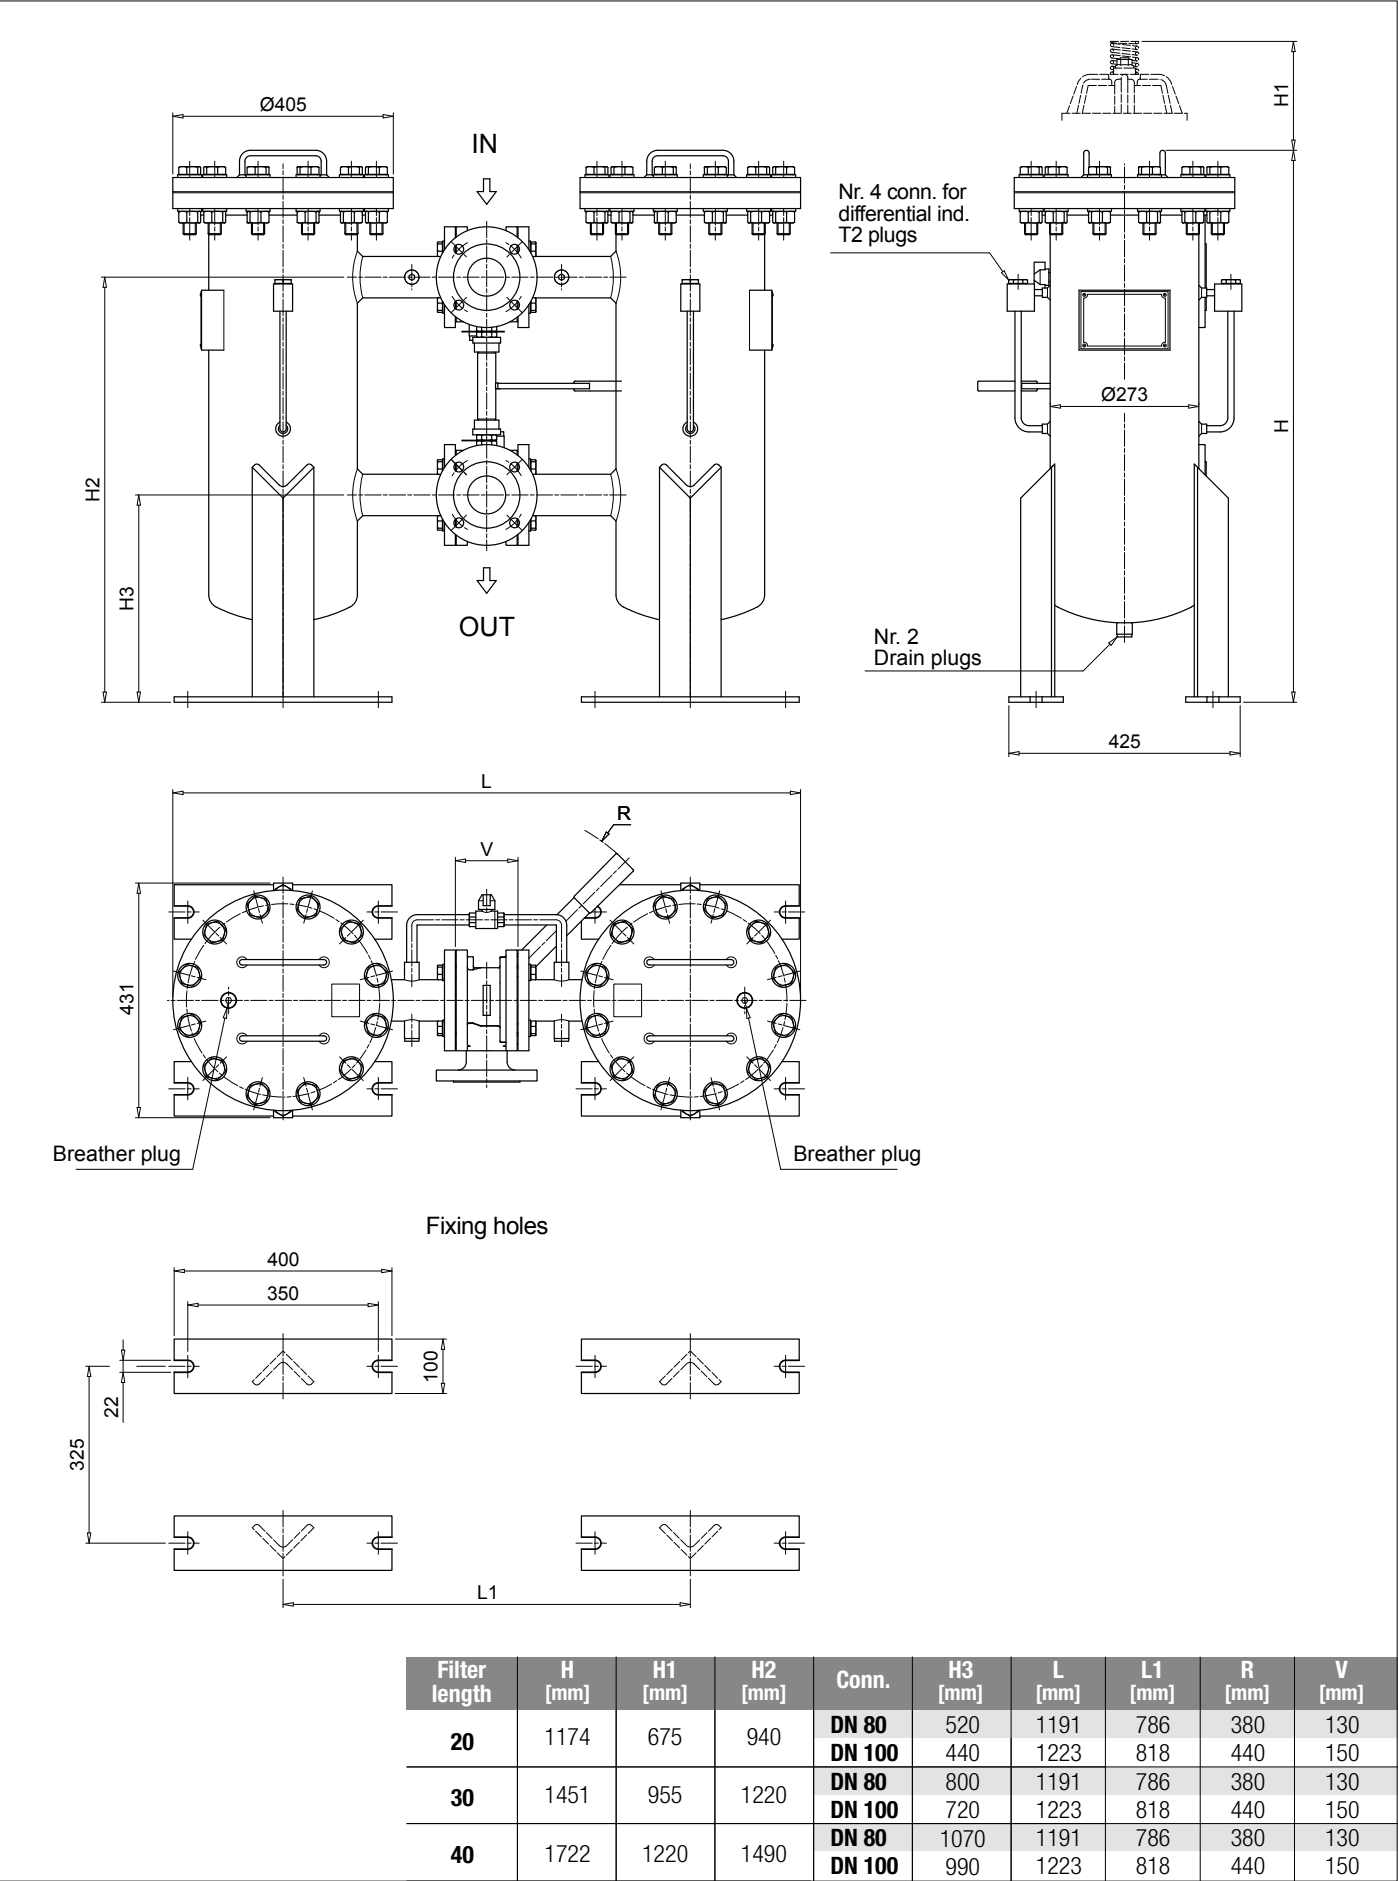
Dimensions



MLDX SPARE PARTS


Order number for spare parts

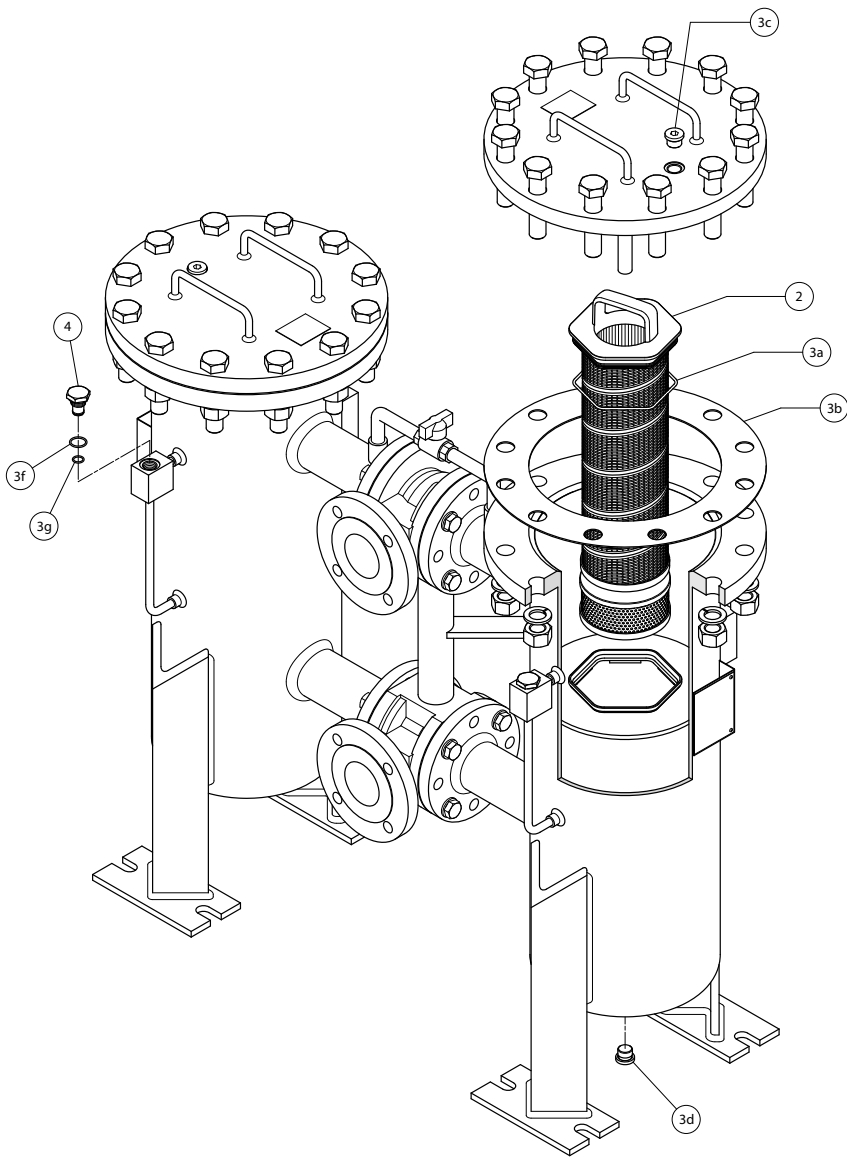MLDX 631 - 633 - 634 - 635




Item:	2	Q.ty: 2 pcs. 3 (3a ÷ 3g)	Q.ty: 4 pcs. 4
Filter series	Filter element	Seal Kit code number NBR	Indicator connection plug NBR
MLDX631	See order table	AK021000684	T2H
MLDX633		AK021000685	T2H
MLDX634		AK021000686	T2H
MLDX635		AK021000687	T2H

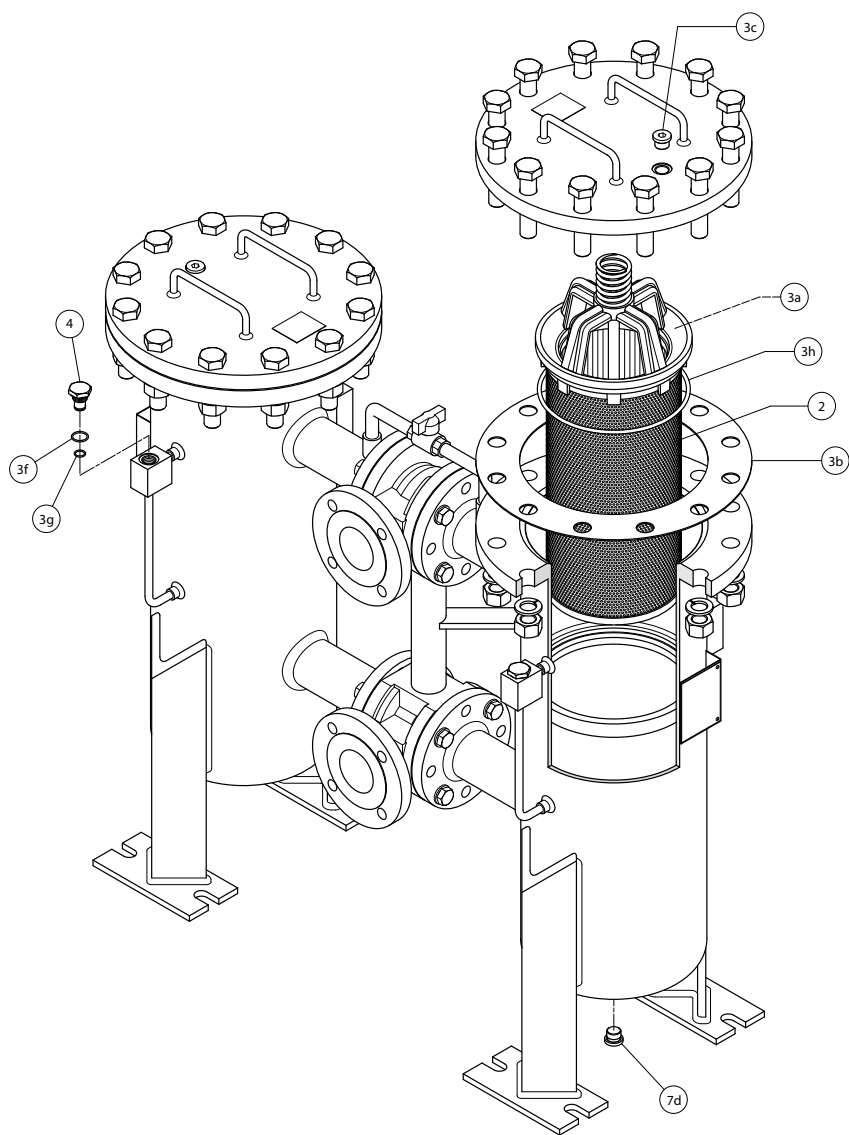MLDC 851



Item:	Q.ty: 1 + 1 pcs. 2	Q.ty: 2 pcs. 3 (3a ÷ 3g)	Q.ty: 4 pcs. 4
Filter series	Filter element	Seal Kit code number NBR	Indicator connection plug NBR
MLDC851	See order table	AK021000786	T2H

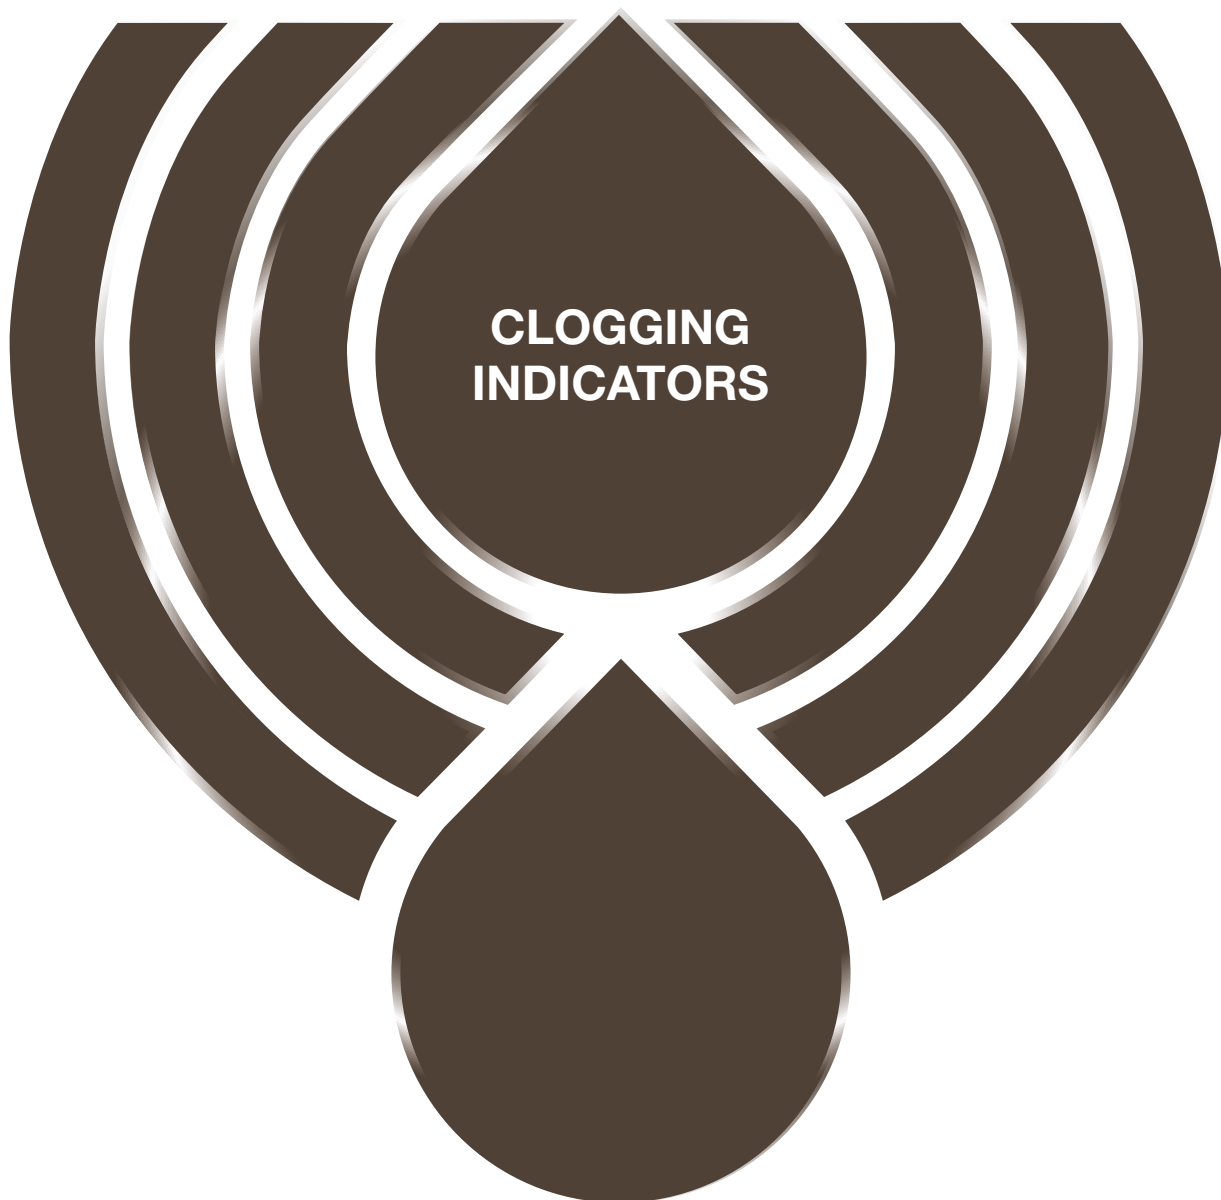

Clogging indicators are devices that check the life time of the filter elements. They measure the pressure drop through the filter element directly connected to the filter housing.

These devices trip when the clogging of the filter element causes a pressure drop increasing across the filter element.

Filter elements are efficient only if their Dirt Holding Capacity is fully exploited. This is achieved by using filter housings equipped with clogging indicators.

The indicator is set to alarm before the element becomes fully clogged.

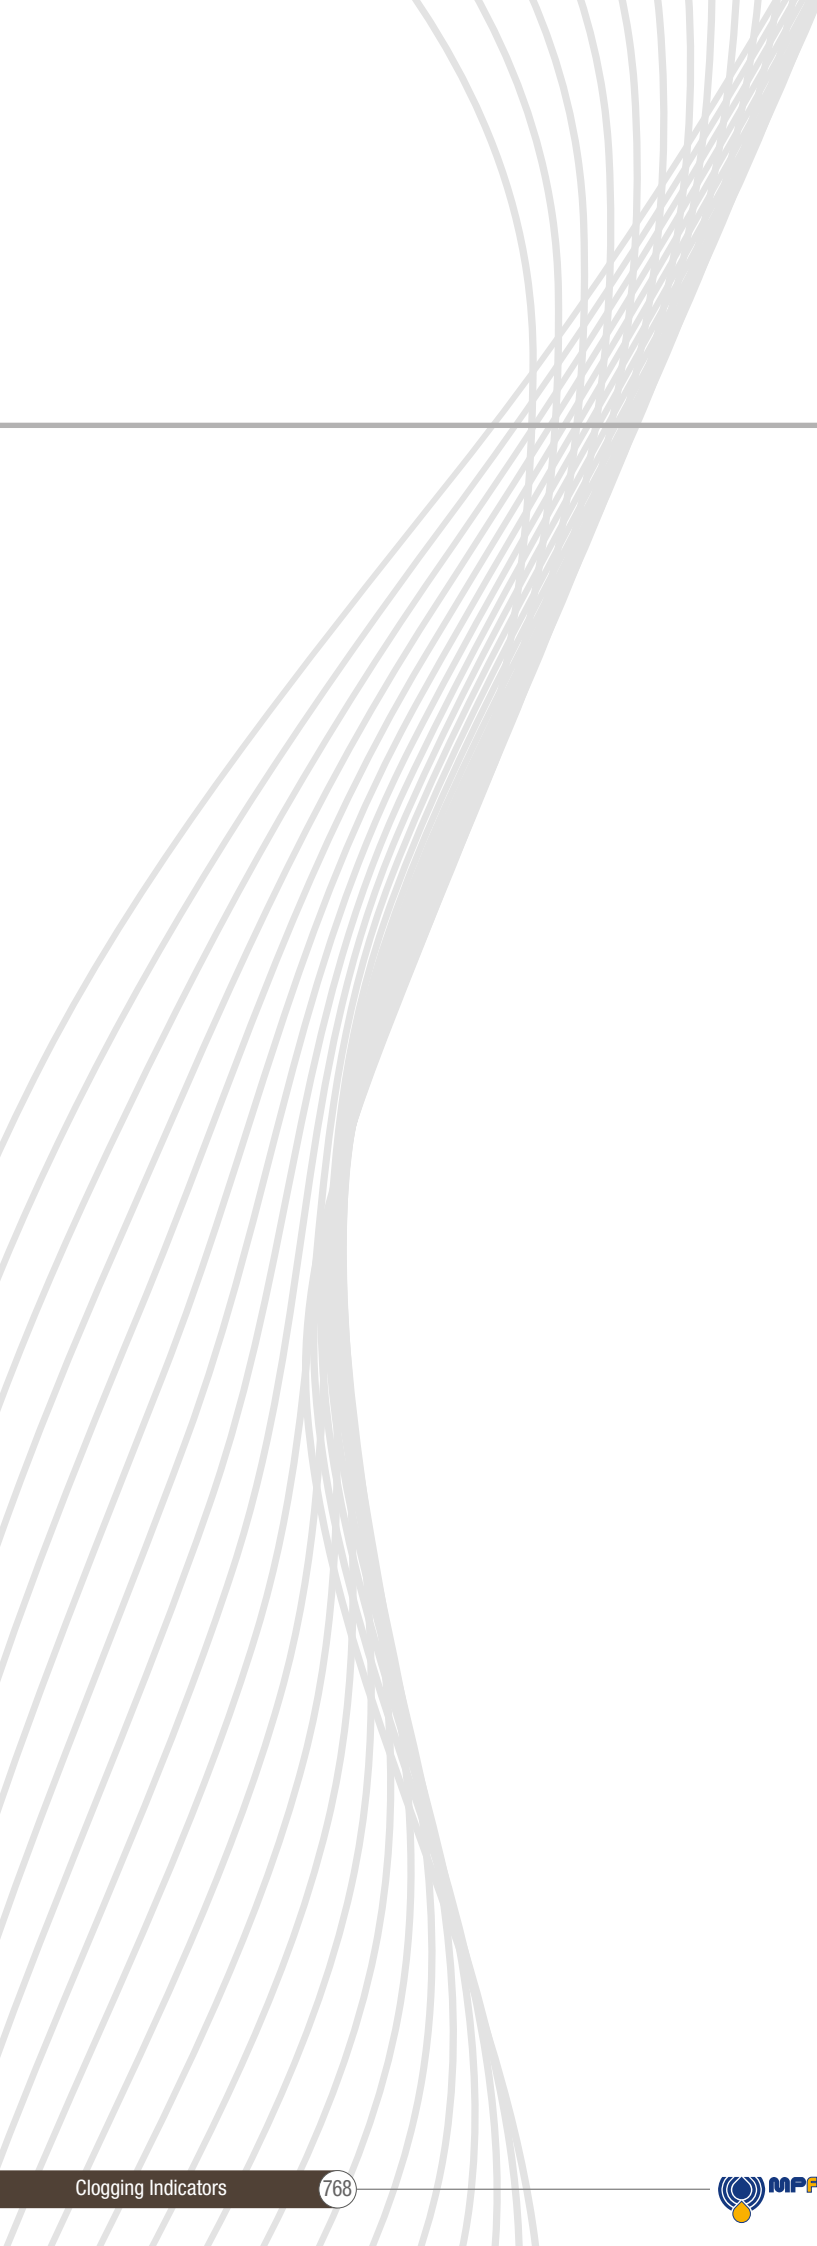
MP Filtri can supply indicators of the following designs:

- Vacuum switches and gauges
- Pressure switches and gauges
- Differential pressure indicators

These type of devices can be provided with a visual, electrical or both signals. The electronic differential pressure clogging indicator is also available. It provides both analogical 4-20 mA output and digital warning (75% of clogging) and alarm (clogging) outputs.

In the following pages you can find a reference guide about the types of clogging indicators available in the different families of MP Filtri's Hydraulic Filtration range of products.





DESIGNATION, ORDERING CODES & TECHNICAL DATA

INDEX

	Page
QUICK REFERENCE GUIDE	770
CLOGGING INDICATORS ORDERING CODES	
SUCTION FILTERS INDICATORS	775
RETURN FILTERS INDICATORS	776
RETURN / SUCTION FILTERS INDICATORS	778
SPIN-ON FILTERS INDICATORS	781
LOW & MEDIUM PRESSURE FILTERS INDICATORS	784
HIGH CAPACITY INDUSTRIAL FILTERS INDICATORS	785
HIGH PRESSURE FILTERS INDICATORS	786
STAINLESS STEEL HIGH PRESSURE FILTERS INDICATORS	787
FILTERS FOR POTENTIALLY EXPLOSIVE ATMOSPHERE INDICATORS	788
TECHNICAL DATA	
VACUUM INDICATORS	790
BAROMETRIC (PRESSURE) INDICATORS	792
DIFFERENTIAL PRESSURE INDICATORS	796
PLUGS	807

QUICK REFERENCE GUIDE

Ordering codes

Filter family	Filter series	Visual indicators	Electrical indicators	Electronic / Electrical-Visual indicators
SUCTION FILTERS	ELIXIR® SFEX 060-110	VVB20P01 VVS20P01	VEB21AA50P01	VLB21AA51P01 VLB21AA52P01 VLB21AA53P01 VLB21AA71P01
	Suction Line SFCM250	VVA20P01 VVR20P01	VEA21xA50P01 VEA21xA50P01UL	VLA21xA51P01 VLA21xA52P01 VLA21xA53P01 VLA21xA71P01
	Without bypass SFSC 500 - 503 - 504 - 505 SFSC 510 - 535 - 540	VVA20P01 VVR20P01	VEA21xA50P01 VEA21xA50P01UL	VLA21xA51P01 VLA21xA52P01 VLA21xA53P01 VLA21xA71P01
RETURN FILTERS	With bypass 1.75 bar ELIXIR® RFEX 060-110	BVA14P01 BVR14P01 BVP15HP01 BVQ15HP01	BEA15HA50P01 BEA15HA50P01UL BEM15HA41P01	BLA15HA51P01 BLA15HA52P01 BLA15HA53P01 BLA15HA71P01
	Without bypass ELIXIR® RFEX 060-110	BVA25P01 BVR25P01 BVP20HP01 BVQ20HP01	BEA20HA50P01 BEA20HA50P01UL BEM20HA41P01	BLA20HA51P01 BLA20HA52P01 BLA20HA53P01 BLA20HA71P01
	With bypass 1.75 bar MDHC 250	BVA14P01 BVR14P01 BVP15HP01 BVQ15HP01 DVS12HP01	BEA15HA50P01 BEA15HA50P01UL BEM15HA41P01 DES12HA10P01 DES12HA30P01 DES12HA80P01	BLA15HA51P01 BLA15HA52P01 BLA15HA53P01 BLA15HA71P01
	With bypass 3 bar MDHC 250	BVA25P01 BVR25P01 BVP20HP01 BVQ20HP01 DVS25HP01	BEA20HA50P01 BEA20HA50P01UL BEM20HA41P01 BET20HF10P01 BET20HF30P01 BET25HF10P01 BET25HF30P01 DES25HA10P01 DES25HA30P01 DES25HA80P01	BLA20HA51P01 BLA20HA52P01 BLA20HA53P01 BLA20HA71P01
	With bypass 1.75 bar MPFX MPTX MPHC	BVA14P01 BVR14P01 BVP15HP01 BVQ15HP01	BEA15HA50P01 BEA15HA50P01UL BEM15HA41P01	BLA15HA51P01 BLA15HA52P01 BLA15HA53P01 BLA15HA71P01
	With bypass 3 bar MPFX MPTX	BVA25P01 BVR25P01 BVP20HP01 BVQ20HP01	BEA20HA50P01 BEA20HA50P01UL BEM20HA41P01	BLA20HA51P01 BLA20HA52P01 BLA20HA53P01 BLA20HA71P01
	With bypass 2.5 bar MPHC	BVP20HP01 BVQ20HP01	BET20HF10P01 BET20HF30P01	BLA20HA51P01 BLA20HA52P01 BLA20HA53P01 BLA20HA71P01
	With bypass 4.5 bar MPLX		DEA20xA50P01 DEM20xx10P01 DEM20xx20P01 DEM20xx30P01 DEM20xx35P01	DLA20xA51P01 DLA20xA52P01 DLA20xA71P01 DLE20xA50P01 DLE20xF50P01
	Return line FRIC 025 - 040 - 100 - 250 - 630 - 850	DVA20xP01 DVM20xP01	DEU20VA50P01UL	DTA20xF70P01 DTI20xA70P01
	Return line FRIC 255	BVA25P01 BVR25P01 BVP20HP01 BVQ20HP01	BEA20HA50P01 BEA20HA50P01UL BEM20HA41P01	BLA20HA51P01 BLA20HA52P01 BLA20HA53P01 BLA20HA71P01

Filter family	Filter series	Visual indicators	Electrical indicators	Electronic / Electrical-Visual indicators
RETURN / SUCTION FILTERS	With bypass 2.5 bar	MRSX 116 - 165 - 166 Suction line	VVB20P01 VVS20P01	VEB21AA50P01 VLB21AA51P01 VLB21AA52P01 VLB21AA53P01 VLB21AA71P01
		MRSX 116 - 165 - 166 Return line	BVA25P01 BVR25P01 BVP20HP01 BVQ20HP01	BEA20HA50P01 BEA20HA50P01UL BEM20HA41P01 BET25HF10P01 BET25HF30P01 BET25HF50P01 BLA20HA51P01 BLA20HA52P01 BLA20HA53P01 BLA20HA71P01
	With bypass 2.5 bar	LMP 124 MULTIPORT	BVA25P01 BVR25P01 BVP20HP01 BVQ20HP01 DVA20xP01 DVM20xP01	BEA20HA50P01 BEA20HA50P01UL BEM20HA41P01 BET25HF10P01 BET25HF30P01 BET25HF50P01 DEA20xA50P01 DEM20xx10P01 DEM20xx20P01 DEM20xx30P01 DEM20xx35P01 DEU20VA50P01UL DLA20xA51P01 DLA20xA52P01 DLA20xA53P01 DLA20xA71P01 DLE20xA50P01 DLE20xF50P01 DTA20xF70P01 DTI20xA70P01
SPIN-ON FILTERS	Suction line	MPS 050 - 070 - 100 - 150 MPS 200 - 250 - 300 - 350	VVB20P01 VVS20P01	VEB21AA50P01 VLB21AA51P01 VLB21AA52P01 VLB21AA53P01 VLB21AA71P01
	Return line	MPS 050 - 070 - 100 - 150 MPS 200 - 250 - 300 - 350	BVA14P01 BVR14P01 BVP15HP01 BVQ15HP01	BEA15HA50P01 BEA15HA50P01UL BEM15HA41P01 BLA15HA51P01 BLA15HA52P01 BLA15HA53P01 BLA15HA71P01
	In-line	MPS 051 - 071 - 101 - 151 MPS 301 - 351	DVA12xP01 DVM12xP01 DVA20xP01 DVM20xP01	DEA12xA50P01 DEM12xAxxP01 DEA20xA50P01 DEM20xAxxP01 DEU20VA50P01UL DLA12xA51P01 DLA12xA52P01 DLA12xA71P01 DLA20xA51P01 DLA20xA52P01 DLA20xA71P01 DLE12xA50P01 DLE12xF50P01 DLE20xF50P01 DLE20xF50P01 DTA12xF70P01 DTA20xF70P01 DTI12xA70P01 DTI20xA70P01

QUICK REFERENCE GUIDE

Ordering codes

Filter family	Filter series	Visual indicators	Electrical indicators	Electronic / Electrical-Visual indicators		
LOW & MEDIUM PRESSURE FILTERS	ELIXIR® HFEX 060-110	DVS25HP01	DES25HA50P01			
	ELIXIR® LFEX 060-080-110-160	DVS25HP01	DES25HA10P01 DES25HA30P01 DES25HA50P01 DES25HA80P01			
	With bypass 3.5 bar	LMP 110 LMP 112 - 116 - 118 - 119 MULTIPORT LMP 120 - 122 - 123 MULTIPORT LMP 210 - 211 - LDP LMP 400 - 401 & 430 - 431 LMP 900 - 901 LMP 902 - 903 LMP 950 - 951 LMP 952 - 953 - 954 LMD 211 - 400 - 401 - 431 - 951 - LDD	DVA20xP01 DVM20xP01	DEA20xA50P01 DEM20xx10P01 DEM20xx20P01 DEM20xx30P01 DEM20xx35P01 DEU20VA50P01UL	DLA20xA51P01 DLA20xA52P01 DLA20xA71P01 DLE20xA50P01 DLE20xF50P01 DTA20xF70P01 DTI20xA70P01	
	With bypass 2.5 bar	LPH 630	DVA20xP01 DVM20xP01	DEA20xA50P01 DEM20xx10P01 DEM20xx20P01 DEM20xx30P01 DEM20xx35P01 DEU20VA50P01UL	DLA20xA51P01 DLA20xA52P01 DLA20xA71P01 DLE20xA50P01 DLE20xF50P01 DTA20xF70P01 DTI20xA70P01	
	With bypass 1.75 bar	LPH 630	DVA12xP01 DVM12xP01	DEA12xA50P01 DEM12xx10P01 DEM12xx20P01 DEM12xx30P01 DEM12xx35P01	DLA12xA51P01 DLA12xA52P01 DLA12xA71P01 DLE12xA50P01 DLE12xF50P01 DTA12xF70P01 DTI12xA70P01	
	Without bypass	ELIXIR® HFEX 060-110	DVS40HP01	DES40HA50P01		
		ELIXIR® LFEX 060-080-110-160	DVS40HP01	DES40HA10P01 DES40HA30P01 DES40HA50P01 DES40HA80P01		
		LMP 110 LMP 112 - 116 - 118 - 119 MULTIPORT LMP 120 - 122 - 123 MULTIPORT LMP 210 - 211 - LDP LMP 400 - 401 & 430 - 431 LMP 900 - 901 LMP 902 - 903 LMP 950 - 951 LMP 952 - 953 - 954 LMD 211 - 400 - 401 - 431 - 951 - LDD LPH 630	DVA50xP01 DVM50xP01	DEA50xA50P01 DEM50xx10P01 DEM50xx20P01 DEM50xx30P01 DEM50xx35P01 DEU50VA50P01UL	DLA50xA51P01 DLA50xA52P01 DLA50xA71P01 DLE50xA50P01 DLE50xF50P01 DTA50xF70P01 DTI50xA70P01	
		HIGH CAPACITY INDUSTRIAL FILTERS	With bypass 3.5 bar	MLPX MLDX	DVA20xP01 DVM20xP01	DEA20xA50P01 DEM20xx10P01 DEM20xx20P01 DEM20xx30P01 DEM20xx35P01v
	With bypass 1.75 bar		MLPC MLDC	DVA12xP01 DVM12xP01	DEA12xA50P01 DEM12xx10P01 DEM12xx20P01 DEM12xx30P01 DEM12xx35P01	DLA12xA51P01 DLA12xA52P01 DLA12xA71P01 DLE12xA50P01 DLE12xF50P01 DTA12xF70P01 DTI12xA70P01
Without bypass	MLDC MLPC		DVA50xP01	DEA50xA50P01 DEM50xx10P01 DEM50xx20P01 DEM50xx30P01 DEM50xx35P01	DLA50xA51P01 DLA50xA52P01 DLA50xA71P01 DLE50xA50P01 DLE50xF50P01 DTA50xF70P01 DTI50xA70P01	
			DVM50xP01			

Filter family	Filter series	Visual indicators	Electrical indicators	Electronic / Electrical-Visual indicators
HIGH PRESSURE FILTERS	With bypass 6 bar	FMP 039 - 065 - 135 - 320 FHP 010 - 011 - 065 - 135 - 350 - 351 - 500 FMMX 050 - 150 FMM 050 - 150 FHA 051 FHM 050 - 065 - 135 - 320 - 500 FHB 050 - 135 - 320 FHF 325 FHD 051 - 326 - 333	DVA50xP01 DVM50xP01	DEA50xA50P01 DEA50xA51P01 DEA50xA52P01 DEA50xA71P01 DEM50xx10P01 DEM50xx20P01 DEM50xx30P01 DEM50xx35P01 DEU50VA50P01UL DLA50xA51P01 DLA50xA52P01 DLA50xA71P01 DLE50xA50P01 DLE50xF50P01 DTA50xF70P01 DTI50xA70P01
	Without bypass	FMP 039 - 065 - 135 - 320 FHP 010 - 011 - 065 - 135 - 350 - 351 - 500 FMMX 050 - 150 FMM 050 - 150 FHA 051 FHM 006 - 007 - 010 - 050 - 065 - 135 - 320 - 500 FHB 050 - 135 - 320 FHF 325 FHD 021 - 051 - 326 - 333	DVA70xP01 DVA95xP01 DVM70xP01 DVM95xP01	DEA70xA50P01 DEA95xA50P01 DEM70xx10P01 DEM70xx20P01 DEM70xx30P01 DEM70xx35P01 DEU70VA50P01UL DEM95xx10P01 DEM95xx20P01 DEM95xx30P01 DEM95xx35P01 DLA70xA51P01 DLA70xA52P01 DLA70xA71P01 DLA95xA51P01 DLA95xA52P01 DLA95xA71P01 DLE70xA50P01 DLE70xF50P01 DLE95xA50P01 DLE95xF50P01 DTA70xF70P01 DTA95xF70P01 DTI70xA70P01 DTI95xA70P01
STAINLESS STEEL HIGH PRESSURE FILTERS	With bypass 6 bar	FZH 012 - 040	DVZ50xP01	DEZ50xA50P01 DLZ50xA51P01 DLZ50xA52P01
	Without bypass	FZH 012 - 040	DVZ70xP01 DVZ95xP01	DEZ70xA50P01 DEZ95xA50P01 DLZ70xA51P01 DLZ70xA52P01 DLZ95xA51P01 DLZ95xA52P01
	With bypass 6 bar	FZP 039 - 136 FZB 039 FZM 039 FZD 051	DVX50xP01 DYY50xP01	DEX50xA50P01 DLX50xA51P01 DLX50xA52P01
	Without bypass	FZP 039 - 136 FZB 039 FZM 039 FZD 010 - 021 - 051	DVX70xP01 DVX95xP01 DYY70xP01 DYY95xP01	DEX70xA50P01 DEX95xA50P01 DLX70xA51P01 DLX70xA52P01 DLX95xA51P01 DLX95xA52P01
FILTERS FOR POTENTIALLY EXPLOSIVE ATMOSPHERE	With bypass 6 bar	FMMX 050 - 150	DVA50xP01 DVM50xP01	DEH50xA48P01 DEH50xA49P01 DEH50xA70P01
	Without bypass	FMMX 050 - 150	DVA70xP01 DVA95xP01 DVM70xP01 DVM95xP01	DEH70xA48P01 DEH70xA49P01 DEH70xA70P01
	With bypass 6 bar	FZP 039 - 136	DVX50xP01 DYY50xP01	DEH50xA48P01 DEH50xA49P01 DEH50xA70P01
	Without bypass	FZP 039 - 136	DVX70xP01 DVX95xP01 DYY70xP01 DYY95xP01	DEH70xA48P01 DEH70xA49P01 DEH70xA70P01
	With bypass 6 bar	FZH 012 - 040	DVZ50xP01	
	Without bypass	FZH 012 - 040	DVZ70xP01 DVZ95xP01	
	With bypass 6 bar	FZP 039 - 136	DVX50xP01 DYY50xP01	DEH50xA48P01 DEH50xA49P01 DEH50xA70P01
	Without bypass	FZP 039 - 136	DVX70xP01 DVX95xP01 DYY70xP01 DYY95xP01	DEH70xA48P01 DEH70xA49P01 DEH70xA70P01

Suitable indicator types

V ACUUM INDICATORS

Vacuum indicators are used on the Suction line to check the efficiency of the filter element.

They measure the pressure downstream of the filter element.

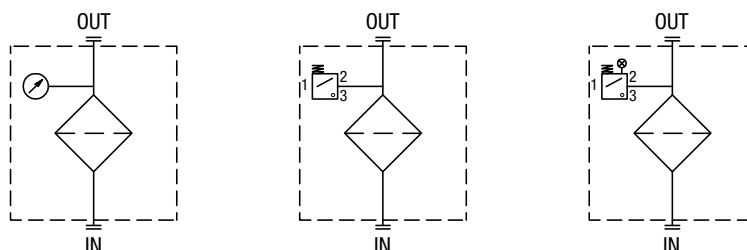
Standard items are produced with R 1/4" EN 10226 connection.

Available products with R 1/8" EN 10226 to be fitted on MPS series.

Vacuum indicators are identified in the Hydraulic Filtration catalogue and in the Quick Reference Guide table by the letter "V".

Example:

V VVB20P01



B BAROMETRIC (PRESSURE) INDICATORS

Pressure indicators are used on the Return line to check the efficiency of the filter element.

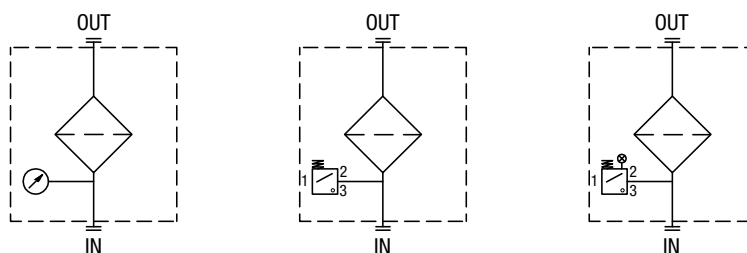
They measure the pressure upstream of the filter element.

Standard items are produced with R 1/8" EN 10226 connection.

Barometric (pressure) indicators are identified in the Hydraulic Filtration catalogue and in the Quick Reference Guide table by the letter "B".

Example:

B BVA14P01



D DIFFERENTIAL PRESSURE INDICATORS

Differential pressure indicators are used on the Pressure line to check the efficiency of the filter element.

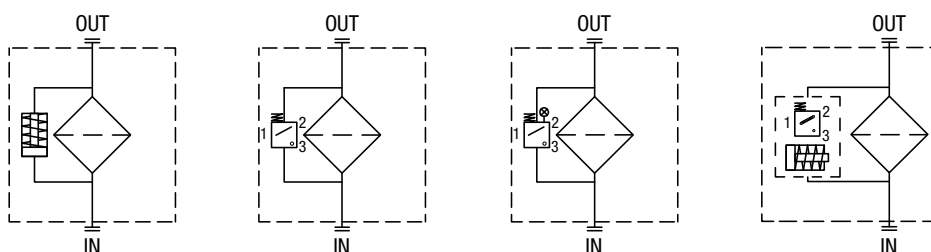
They measure the pressure upstream and downstream of the filter element (differential pressure).

Standard items are produced with special connection G 1/2" size.

Also available in Stainless Steel models. Differential pressure indicators are identified in the Hydraulic Filtration catalogue and in the Quick Reference Guide table by the letter "D".

Example:

D DVA20xP01



APPLICABLE DIFFERENTIAL PRESSURE INDICATORS BY FILTER SERIES

Filter Series	DEA	DEM	DLA	DLE	DTA	DTI	DVA	DVM
MLPX	•	•	•	•	•	•	•	•
MLPC	•	•	•	•	•	•	•	•
MLDX	•	•	•	•	•	•	•	•
MLDC	•	•	•	•	•	•	•	•

DIFFERENTIAL PRESSURE INDICATORS

Series	Configuration example 1:									
DE Electrical differential pressure indicator	Configuration example 2:									
DL Electrical/Visual differential pressure indicator	Configuration example 3:									
DT Electronic differential pressure indicator	Configuration example 4:									
DV Visual differential pressure indicator	Configuration example 5:									
	DE	M	20	H	F	50	P01			
	DT	I	50	V	A	70	P01			
	DL	E	50	V	A	71	P01			
	DT	A	20	H	F	70	P01			
	DV	M	50	V			P01			
Type	DE	DL	DT	DV						
A Standard type	•	•	•	A	With automatic reset					
I I-O Link type	-	-	•	M	With manual reset					
M With wired electrical connection	•	-	-							
E For high power supply	-	•	-							
Pressure setting	DEA	DEM	DLA	DLE	DTA	DTI	DVA	DVM		
12 1.2 bar	•	•	•	•	•	•	•	•		
20 2.0 bar	•	•	•	•	•	•	•	•		
25 2.5 bar	-	-	-	-	-	-	-	-		
40 4.0 bar	-	-	-	-	-	-	-	-		
50 5.0 bar	•	•	•	•	•	•	•	•		
Seals	DEA	DEM	DL	DT	DVA	DVM				
H HNBR			•	•	•	•	•	•		
V FPM			•	•	•	•	•	•		
Thermostat	DEA	DEM	DLA	DLE	DTA	DTI				
A Without thermostat			•	•	•	•	-	•		
F With thermostat			-	•	-	•	•	-		
Electrical connections	DEA	DEM	DLA	DLE	DT					
10 Connection AMP Superseal series 1.5	-	•	-	-	-					
20 Connection AMP Timer Junior	-	•	-	-	-					
30 Connection Deutsch DT-04-2-P	-	•	-	-	-					
35 Connection Deutsch DT-04-3-P	-	•	-	-	-					
50 Connection EN 175301-803	•	-	-	•	-					
51 Connection EN 175301-803, transparent base with lamps 24 Vdc	-	-	•	-	-					
52 Connection EN 175301-803, transparent base with lamps 110 Vdc	-	-	•	-	-					
70 Connection IEC 61076-2-101 D (M12)	-	-	-	-	•					
71 Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc	-	-	•	-	-					
Option										
P01 MP Filtri standard										
Pxx Customized										



PLUGS





Series	Example:	T2	H
T2 Plug			
Seals			
A NBR	-		
H HNBR	•		
V FPM	•		



DIFFERENTIAL PRESSURE INDICATORS

Dimensions

DEA*50 Electrical Differential Pressure Indicator Connection: EN 175301-803 <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DE A 12 x A 50 P01</td></tr><tr><td>2.0 bar ±10%</td><td>DE A 20 x A 50 P01</td></tr><tr><td>5.0 bar ±10%</td><td>DE A 50 x A 50 P01</td></tr><tr><td>7.0 bar ±10%</td><td>DE A 70 x A 50 P01</td></tr><tr><td>9.5 bar ±10%</td><td>DE A 95 x A 50 P01</td></tr></table> A/F 30 Max tightening torque: 65 N·m		Settings	Ordering code	1.2 bar ±10%	DE A 12 x A 50 P01	2.0 bar ±10%	DE A 20 x A 50 P01	5.0 bar ±10%	DE A 50 x A 50 P01	7.0 bar ±10%	DE A 70 x A 50 P01	9.5 bar ±10%	DE A 95 x A 50 P01	Hydraulic symbol Electrical symbol	Materials - Body: Brass - Base: Black polyamide - Contacts: Silver - Seal: HNBR - FPM Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529 IP69K according to ISO 20653 Electrical data - Electrical connection: EN 175301-803 - Resistive load: 0.2 A / 115 Vdc
Settings	Ordering code														
1.2 bar ±10%	DE A 12 x A 50 P01														
2.0 bar ±10%	DE A 20 x A 50 P01														
5.0 bar ±10%	DE A 50 x A 50 P01														
7.0 bar ±10%	DE A 70 x A 50 P01														
9.5 bar ±10%	DE A 95 x A 50 P01														
DEH*48 Hazardous Area Electrical Differential Pressure Indicator Connection via three-core cable - cable fitting M20x1.5 <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>2.0 bar ±10%</td><td>DE H 20 x A 48 P01</td></tr><tr><td>5.0 bar ±10%</td><td>DE H 50 x A 48 P01</td></tr><tr><td>7.0 bar ±10%</td><td>DE H 70 x A 48 P01</td></tr></table> A/F 25 Max tightening torque: 100 N·m flexible cable ≈ 5000 to A		Settings	Ordering code	2.0 bar ±10%	DE H 20 x A 48 P01	5.0 bar ±10%	DE H 50 x A 48 P01	7.0 bar ±10%	DE H 70 x A 48 P01	Hydraulic symbol Electrical symbol - Certification / Approvals: ATEX, IECEx, EAC TR CU - Certification included as standard	Materials - Body: AISI 316L - Contacts: Rhodium - Seal: FPM - MFQ Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Temperature range: T4=Tamb -60 °C to +125 °C (-76 to 257 °F) T6=Tamb -60 °C to +80 °C (-76 to 176 °F) - Degree of protection: IP 66/67/68 according to EN 60529 - Connection type: Three-core cable, fitting M20x1.5 - Contact type: SPCO/SPDT (Hermetically sealed - Volt-free contacts) Electrical data - Resistive Load: 830 mA / 24 Vdc - 180 mA / 110 Vac - Electrical Ratings: Ui = 30 Vdc / li = 250 mA / Pi = 1.3 W Atex Rating - II 1 GD Ex ia IIC T6 Ga - Ex ia IIC T4 Ga - Ex ia IIIC T₂₀₀ 85 °C Da - Ex ia IIIC T₂₀₀ 135 °C Da IECEx Rating - Ex ia IIC T6 Ga - Ex ia IIC T4 Ga - Ex ia IIIC T₂₀₀ 85 °C Da - Ex ia IIIC T₂₀₀ 135 °C Da				
Settings	Ordering code														
2.0 bar ±10%	DE H 20 x A 48 P01														
5.0 bar ±10%	DE H 50 x A 48 P01														
7.0 bar ±10%	DE H 70 x A 48 P01														
DEH*49 Hazardous Area Electrical Differential Pressure Indicator Connection via four-core cable - cable fitting 1/2" NPT <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>2.0 bar ±10%</td><td>DE H 20 x A 49 P01</td></tr><tr><td>5.0 bar ±10%</td><td>DE H 50 x A 49 P01</td></tr><tr><td>7.0 bar ±10%</td><td>DE H 70 x A 49 P01</td></tr></table> A/F 25 Max tightening torque: 100 N·m flexible cable ≈ 5000 to A		Settings	Ordering code	2.0 bar ±10%	DE H 20 x A 49 P01	5.0 bar ±10%	DE H 50 x A 49 P01	7.0 bar ±10%	DE H 70 x A 49 P01	Hydraulic symbol Electrical symbol - Certification / Approvals: ATEX, IECEx, EAC TR CU, UL/CSA - Certification included as standard	Materials - Body: AISI 316L - Contacts: Rhodium - Seal: FPM - MFQ Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Temperature range: T4=Tamb -60 °C to +120 °C (-76 to 248 °F) T6=Tamb -60 °C to +70 °C (-76 to 158 °F) From -60 °C to +105 °C (-76 to 221 °F) : UL/CSA - Degree of protection: IP 66/67/68 according to EN 60529 - Connection type: Four-core cable, fitting 1/2" NPT - Contact type: SPCO/SPDT (Hermetically sealed - Volt-free contacts) Electrical data - Resistive Load: 830 mA / 24 Vdc - 180 mA / 110 Vac - Electrical Ratings: Ui = 150 Vac/dc / Pi = 20 W Atex Rating - II 2 GD Ex db IIC T6 Gb - Ex db IIC T4 Gb - Ex tb IIIC T85 °C Db - Ex tb IIC T135 °C Db IECEx Rating - Ex db IIC T6 Gb - Ex db IIC T4 Gb - Ex tb IIIC T85 °C Db - Ex tb IIC T135 °C Db UL/CSA Rating - Class I Div 1 Groups A, B, C, & D - Class II Div 1 Groups E, F, & G - Class III Hazardous Locations				
Settings	Ordering code														
2.0 bar ±10%	DE H 20 x A 49 P01														
5.0 bar ±10%	DE H 50 x A 49 P01														
7.0 bar ±10%	DE H 70 x A 49 P01														










DEH*70		Hydraulic symbol	Materials
Hazardous Area Electrical Differential Pressure Indicator Connection IEC 61076-2-101 D (M12)			
Settings	Ordering code	Electrical symbol	Technical data
2.0 bar ±10%	DE H 20 x A 70 P01		
5.0 bar ±10%	DE H 50 x A 70 P01		
7.0 bar ±10%	DE H 70 x A 70 P01		
		  	Electrical data - Resistive Load: 830 mA / 24 Vdc - 180 mA / 110 Vdc - Electrical Ratings: $U_i = 30 \text{ Vdc}$ / $I_i = 250 \text{ mA}$ / $P_i = 1.3 \text{ W}$ Atex Rating II 1 GD Ex ia IIC T6 Ga Ex ia IIIC T ₂₀₀ 135 °C Da IECEx Rating Ex ia IIC T6 Ga Ex ia IIIC T ₂₀₀ 135 °C Da
- Certification / Approvals: ATEX, IECEx, EAC TR CU - Certification included as standard			



DEM*F10		Hydraulic symbol	Materials
Electrical Differential Pressure Indicator Connection: AMP Superseal series 1.5			
Settings	Ordering code	Electrical symbol	Technical data
1.2 bar ±10%	DE M 12 x F 10 P01		
2.0 bar ±10%	DE M 20 x F 10 P01		
5.0 bar ±10%	DE M 50 x F 10 P01		
7.0 bar ±10%	DE M 70 x F 10 P01		
9.5 bar ±10%	DE M 95 x F 10 P01		
			- Body: Brass - Base: Black polyamide - Contacts: Silver - Seal: HNBR - FPM
			- Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529
			- Electrical connection: AMP Superseal series 1.5 - Resistive load: 0.2 A / 115 Vdc - Switching type: Normally open contacts (NC on request) - Thermal lockout: Normally open up to 30 °C (option "F")




DEM*F20		Hydraulic symbol	Materials
Electrical Differential Pressure Indicator AMP Time junior			
Settings	Ordering code	Electrical symbol	Technical data
1.2 bar ±10%	DE M 12 x F 20 P01		
2.0 bar ±10%	DE M 20 x F 20 P01		
5.0 bar ±10%	DE M 50 x F 20 P01		
7.0 bar ±10%	DE M 70 x F 20 P01		
9.5 bar ±10%	DE M 95 x F 20 P01		
			Materials - Body: Brass - Base: Black polyamide - Contacts: Silver - Seal: HNBR - FPM Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529 Electrical data - Electrical connection: AMP Time junior - Resistive load: 0.2 A / 115 Vdc - Switching type: Normally open contacts (NC on request) - Thermal lockout: Normally open up to 30 °C (option "F")




DIFFERENTIAL PRESSURE INDICATORS

Dimensions

DEM*F30 Electrical Differential Pressure Indicator Deutsch DT-04-2-P <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DE M 12 x F 30 P01</td></tr><tr><td>2.0 bar ±10%</td><td>DE M 20 x F 30 P01</td></tr><tr><td>5.0 bar ±10%</td><td>DE M 50 x F 30 P01</td></tr><tr><td>7.0 bar ±10%</td><td>DE M 70 x F 30 P01</td></tr><tr><td>9.5 bar ±10%</td><td>DE M 95 x F 30 P01</td></tr></table> 		Settings	Ordering code	1.2 bar ±10%	DE M 12 x F 30 P01	2.0 bar ±10%	DE M 20 x F 30 P01	5.0 bar ±10%	DE M 50 x F 30 P01	7.0 bar ±10%	DE M 70 x F 30 P01	9.5 bar ±10%	DE M 95 x F 30 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: Brass - Base: Black polyamide - Contacts: Silver - Seal: HNBR - FPM Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529 Electrical data - Electrical connection: Deutsch DT-04-2-P - Resistive load: 0.2 A / 115 Vdc - Switching type: Normally open contacts (NC on request) - Thermal lockout: Normally open up to 30 °C (option "F")
Settings	Ordering code														
1.2 bar ±10%	DE M 12 x F 30 P01														
2.0 bar ±10%	DE M 20 x F 30 P01														
5.0 bar ±10%	DE M 50 x F 30 P01														
7.0 bar ±10%	DE M 70 x F 30 P01														
9.5 bar ±10%	DE M 95 x F 30 P01														
DEM*F35 Electrical Differential Pressure Indicator Deutsch DT-04-3-P <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DE M 12 x F 35 P01</td></tr><tr><td>2.0 bar ±10%</td><td>DE M 20 x F 35 P01</td></tr><tr><td>5.0 bar ±10%</td><td>DE M 50 x F 35 P01</td></tr><tr><td>7.0 bar ±10%</td><td>DE M 70 x F 35 P01</td></tr><tr><td>9.5 bar ±10%</td><td>DE M 95 x F 35 P01</td></tr></table> 		Settings	Ordering code	1.2 bar ±10%	DE M 12 x F 35 P01	2.0 bar ±10%	DE M 20 x F 35 P01	5.0 bar ±10%	DE M 50 x F 35 P01	7.0 bar ±10%	DE M 70 x F 35 P01	9.5 bar ±10%	DE M 95 x F 35 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: Brass - Base: Black polyamide - Contacts: Silver - Seal: HNBR - FPM Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529 Electrical data - Electrical connection: Deutsch DT-04-3-P - Resistive load: 0.2 A / 115 Vdc - Switching type: SPDT contact - Thermal lockout: Normally open up to 30 °C (option "F")
Settings	Ordering code														
1.2 bar ±10%	DE M 12 x F 35 P01														
2.0 bar ±10%	DE M 20 x F 35 P01														
5.0 bar ±10%	DE M 50 x F 35 P01														
7.0 bar ±10%	DE M 70 x F 35 P01														
9.5 bar ±10%	DE M 95 x F 35 P01														
DEM*A10 Electrical Differential Pressure Indicator Connection: AMP Superseal series 1.5 <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DE M 12 x A 10 P01</td></tr><tr><td>2.0 bar ±10%</td><td>DE M 20 x A 10 P01</td></tr><tr><td>5.0 bar ±10%</td><td>DE M 50 x A 10 P01</td></tr><tr><td>7.0 bar ±10%</td><td>DE M 70 x A 10 P01</td></tr><tr><td>9.5 bar ±10%</td><td>DE M 95 x A 10 P01</td></tr></table> 		Settings	Ordering code	1.2 bar ±10%	DE M 12 x A 10 P01	2.0 bar ±10%	DE M 20 x A 10 P01	5.0 bar ±10%	DE M 50 x A 10 P01	7.0 bar ±10%	DE M 70 x A 10 P01	9.5 bar ±10%	DE M 95 x A 10 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: Brass - Base: Black polyamide - Contacts: Silver - Seal: HNBR - FPM Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529 Electrical data - Electrical connection: AMP Superseal series 1.5 - Resistive load: 0.2 A / 115 Vdc - Switching type: Normally open contacts (NC on request)
Settings	Ordering code														
1.2 bar ±10%	DE M 12 x A 10 P01														
2.0 bar ±10%	DE M 20 x A 10 P01														
5.0 bar ±10%	DE M 50 x A 10 P01														
7.0 bar ±10%	DE M 70 x A 10 P01														
9.5 bar ±10%	DE M 95 x A 10 P01														










DEM*A20		Hydraulic symbol	Materials
Electrical Differential Pressure Indicator AMP Time junior			- Body: Brass - Base: Black polyamide - Contacts: Silver - Seal: HNBR - FPM
Settings	Ordering code	Electrical symbol	Technical data
1.2 bar $\pm 10\%$	DE M 12 x A 20 P01		- Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529
2.0 bar $\pm 10\%$	DE M 20 x A 20 P01		
5.0 bar $\pm 10\%$	DE M 50 x A 20 P01		
7.0 bar $\pm 10\%$	DE M 70 x A 20 P01		
9.5 bar $\pm 10\%$	DE M 95 x A 20 P01		
		Electrical data	
		- Electrical connection: AMP Time junior - Resistive load: 0.2 A / 115 Vdc - Switching type: Normally open contacts (NC on request)	




DEM*A30		Hydraulic symbol	Materials
Electrical Differential Pressure Indicator Deutsch DT-04-2-P			- Body: Brass - Base: Black polyamide - Contacts: Silver - Seal: HNBR - FPM
Settings	Ordering code	Electrical symbol	Technical data
1.2 bar $\pm 10\%$	DE M 12 x A 30 P01		- Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529
2.0 bar $\pm 10\%$	DE M 20 x A 30 P01		Electrical data
5.0 bar $\pm 10\%$	DE M 50 x A 30 P01		- Electrical connection: Deutsch DT-04-2-P - Resistive load: 0.2 A / 115 Vdc - Switching type: Normally open contacts (NC on request)
7.0 bar $\pm 10\%$	DE M 70 x A 30 P01		
9.5 bar $\pm 10\%$	DE M 95 x A 30 P01		
			



DEM*A35		Hydraulic symbol	Materials
Electrical Differential Pressure Indicator Deutsch DT-04-3-P			- Body: Brass - Base: Black polyamide - Contacts: Silver - Seal: HNBR - FPM
Settings	Ordering code	Electrical symbol	Technical data
1.2 bar $\pm 10\%$	DE M 12 x A 35 P01		- Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943
2.0 bar $\pm 10\%$	DE M 20 x A 35 P01		- Degree protection: IP66 according to EN 60529
5.0 bar $\pm 10\%$	DE M 50 x A 35 P01		
7.0 bar $\pm 10\%$	DE M 70 x A 35 P01		
9.5 bar $\pm 10\%$	DE M 95 x A 35 P01		
			




DIFFERENTIAL PRESSURE INDICATORS

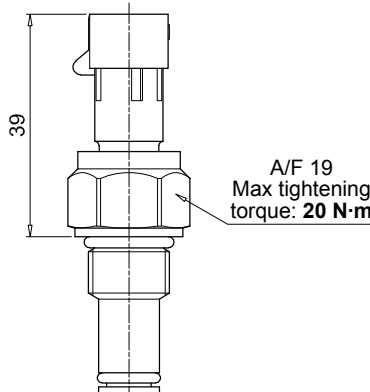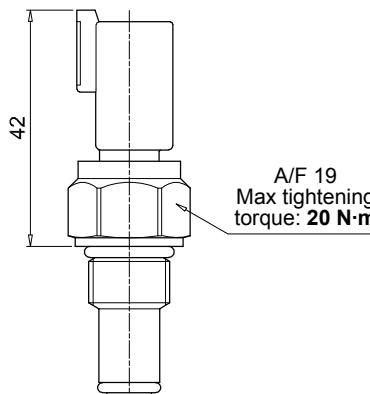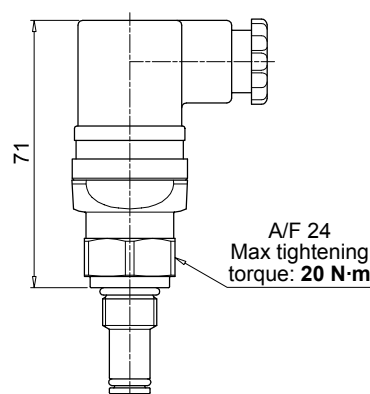Dimensions

DES*10 Electrical Differential Pressure Indicator AMP Superseal series 1.5 <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DE S 12 H A 10 P01</td></tr><tr><td>2.5 bar ±10%</td><td>DE S 25 H A 10 P01</td></tr><tr><td>4.0 bar ±10%</td><td>DE S 40 H A 10 P01</td></tr></table> 	Settings	Ordering code	1.2 bar ±10%	DE S 12 H A 10 P01	2.5 bar ±10%	DE S 25 H A 10 P01	4.0 bar ±10%	DE S 40 H A 10 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: Brass - Internal parts: Brass - Polyamide - Contacts: Silver - Seal: HNBR Technical data - Max working pressure: 16 bar - Proof pressure: 24 bar - Burst pressure: 48 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids - Degree protection: HFB and HFC according to ISO 2943 IP67 according to EN 60529 Electrical data - Electrical connection: AMP Superseal series 1.5 - Resistive load: 0.2 A / 24 Vdc - Switching type: Normally open contacts (NC on request)
Settings	Ordering code									
1.2 bar ±10%	DE S 12 H A 10 P01									
2.5 bar ±10%	DE S 25 H A 10 P01									
4.0 bar ±10%	DE S 40 H A 10 P01									
DES*30 Electrical Differential Pressure Indicator Deutsch DT-04-2-P <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DE S 12 H A 30 P01</td></tr><tr><td>2.5 bar ±10%</td><td>DE S 25 H A 30 P01</td></tr><tr><td>4.0 bar ±10%</td><td>DE S 40 H A 30 P01</td></tr></table> 	Settings	Ordering code	1.2 bar ±10%	DE S 12 H A 30 P01	2.5 bar ±10%	DE S 25 H A 30 P01	4.0 bar ±10%	DE S 40 H A 30 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: Brass - Internal parts: Brass - Polyamide - Contacts: Silver - Seal: HNBR Technical data - Max working pressure: 16 bar - Proof pressure: 24 bar - Burst pressure: 48 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids - Degree protection: HFB and HFC according to ISO 2943 IP67 according to EN 60529 Electrical data - Electrical connection: Deutsch DT-04-2-P - Resistive load: 0.2 A / 24 Vdc - Switching type: Normally open contacts (NC on request)
Settings	Ordering code									
1.2 bar ±10%	DE S 12 H A 30 P01									
2.5 bar ±10%	DE S 25 H A 30 P01									
4.0 bar ±10%	DE S 40 H A 30 P01									
DES*50 Electrical Differential Pressure Indicator Connection: EN 175301-803 <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DE S 12 H A 50 P01</td></tr><tr><td>2.4 bar ±10%</td><td>DE S 25 H A 50 P01</td></tr><tr><td>4.0 bar ±10%</td><td>DE S 40 H A 50 P01</td></tr></table> 	Settings	Ordering code	1.2 bar ±10%	DE S 12 H A 50 P01	2.4 bar ±10%	DE S 25 H A 50 P01	4.0 bar ±10%	DE S 40 H A 50 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: Aluminium - Internal parts: Aluminium - Polyamide - Contacts: Silver - Seal: HNBR Technical data - Max working pressure: 35 bar - Proof pressure: 53 bar - Burst pressure: 105 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids - Degree protection: HFB and HFC according to ISO 2943 IP66 according to EN 60529 IP69K according to EN 20653 Electrical data - Electrical connection: EN 175301-803 - Resistive load: 0.2 A / 115 Vdc
Settings	Ordering code									
1.2 bar ±10%	DE S 12 H A 50 P01									
2.4 bar ±10%	DE S 25 H A 50 P01									
4.0 bar ±10%	DE S 40 H A 50 P01									








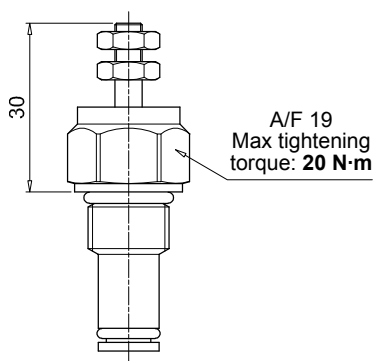

DES*80		Hydraulic symbol	Materials	
Electrical Differential Pressure Indicator Stud #10-32 UNF				
Settings	Ordering code		- Body: Brass - Internal parts: Brass - Polyamide - Contacts: Silver - Seal: HNBR	
1.2 bar ±10%	DE S 12 HA 80 P01			
2.5 bar ±10%	DE S 25 HA 80 P01			
4.0 bar ±10%	DE S 40 HA 80 P01			
 A/F 19 Max tightening torque: 20 N·m		Technical data		
		- Max working pressure:	16 bar	- Degree protection: IP67 according to EN 60529
		- Proof pressure:	24 bar	
		- Burst pressure:	48 bar	
		- Working temperature:	From -25 °C to +110 °C	
		- Compatibility with fluids:	Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943	
		Electrical symbol	Electrical data	
			- Electrical connection:	Stud #10-32 UNF
			- Resistive load:	0.2 A / 24 Vdc
			- Switching type:	Normally open contacts (NC on request)

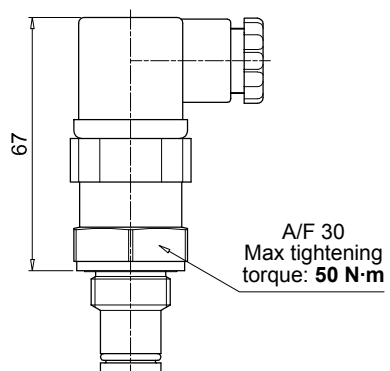DEU*50 UL		Hydraulic symbol	Materials
Electrical Differential Pressure Indicator Connection EN 175301-803			
Settings	Ordering code		Brass Black Polyamide Silver FPM
2.0 bar ±10%	DE U 20 V A 50 P01 UL		
5.0 bar ±10%	DE U 50 V A 50 P01 UL		
7.0 bar ±10%	DE U 70 V A 50 P01 UL		
 A/F 30 Max tightening torque: 50 N·m		Technical data	
		- Max working pressure:	210 bar
		- Proof pressure:	220 bar
		- Burst pressure:	880 bar
		- Working temperature:	From --25 °C to +85 °C
		- Compatibility with fluids:	Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943
		- Degree protection:	IP65 according to EN 60529
		Electrical data	
		- Electrical connection:	EN 175301-803
		- Resistive load:	3 A / 30 Vdc 3 A / 125 Vac 3 (3) A / 250 Vac
		 - Certification: UL - Certification included as standard	

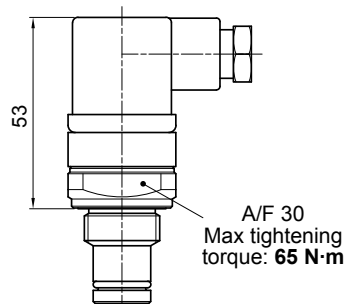DEX*50		Hydraulic symbol	Materials		
Electrical Differential Pressure Indicator Connection: EN 175301-803					
Settings	Ordering code		AISI 316L Black polyamide Silver HNBR - MFQ		
1.2 bar ±10%	DE X 12 x A 50 P01				
2.0 bar ±10%	DE X 20 x A 50 P01				
5.0 bar ±10%	DE X 50 x A 50 P01				
7.0 bar ±10%	DE X 70 x A 50 P01				
9.5 bar ±10%	DE X 95 x A 50 P01		Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529 IP69K according to ISO 20653		
 A/F 30 Max tightening torque: 65 N·m				Electrical data - Electrical connection: EN 175301-803 - Resistive load: 0.2 A / 115 Vdc	

DIFFERENTIAL PRESSURE INDICATORS

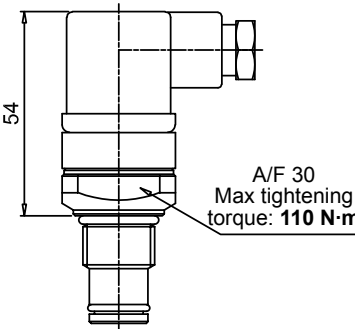Dimensions

DEZ*50 Electrical Differential Pressure Indicator Connection: EN 175301-803 <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>5.0 bar ±10%</td><td>DE Z 50 x A 50 P01</td></tr><tr><td>7.0 bar ±10%</td><td>DE Z 70 x A 50 P01</td></tr><tr><td>9.5 bar ±10%</td><td>DE Z 95 x A 50 P01</td></tr></table>  A/F 30 Max tightening torque: 110 N·m	Settings	Ordering code	5.0 bar ±10%	DE Z 50 x A 50 P01	7.0 bar ±10%	DE Z 70 x A 50 P01	9.5 bar ±10%	DE Z 95 x A 50 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: AISI 316L - Base: Black polyamide - Contacts: Silver - Seal: HNBR - MFQ Technical data - Max working pressure: 700 bar - Proof pressure: 1050 bar - Burst pressure: 2100 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFA, HFB, HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529 IP69K according to ISO 20653 Electrical data - Electrical connection: EN 175301-803 - Resistive load: 0.2 A / 115 Vdc				
Settings	Ordering code													
5.0 bar ±10%	DE Z 50 x A 50 P01													
7.0 bar ±10%	DE Z 70 x A 50 P01													
9.5 bar ±10%	DE Z 95 x A 50 P01													
DLA*51 - DLA*52 Electrical/Visual Differential Pressure Indicator Connection: EN 175301-803 51: Transparent base with lamps 24 Vdc 52: Transparent base with lamps 110 Vdc <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DL A 12 x A xx P01</td></tr><tr><td>2.0 bar ±10%</td><td>DL A 20 x A xx P01</td></tr><tr><td>5.0 bar ±10%</td><td>DL A 50 x A xx P01</td></tr><tr><td>7.0 bar ±10%</td><td>DL A 70 x A xx P01</td></tr><tr><td>9.5 bar ±10%</td><td>DL A 95 x A xx P01</td></tr></table>  A/F 30 Max tightening torque: 65 N·m	Settings	Ordering code	1.2 bar ±10%	DL A 12 x A xx P01	2.0 bar ±10%	DL A 20 x A xx P01	5.0 bar ±10%	DL A 50 x A xx P01	7.0 bar ±10%	DL A 70 x A xx P01	9.5 bar ±10%	DL A 95 x A xx P01	Hydraulic symbol  Electrical symbol 	Materials - Body: Brass - Base: Transparent polyamide - Contacts: Silver - Seal: HNBR - FPM Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529 IP69K according to ISO 20653 Electrical data - Electrical connection: EN 175301-803 - Type: 51 52 - Lamps: 24 Vdc 110 Vdc - Resistive load: 1 A / 24 Vdc 1 A / 110 Vdc
Settings	Ordering code													
1.2 bar ±10%	DL A 12 x A xx P01													
2.0 bar ±10%	DL A 20 x A xx P01													
5.0 bar ±10%	DL A 50 x A xx P01													
7.0 bar ±10%	DL A 70 x A xx P01													
9.5 bar ±10%	DL A 95 x A xx P01													
DLA*71 Electrical/Visual Differential pressure indicator Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DL A 12 x A 71 P01</td></tr><tr><td>2.0 bar ±10%</td><td>DL A 20 x A 71 P01</td></tr><tr><td>5.0 bar ±10%</td><td>DL A 50 x A 71 P01</td></tr><tr><td>7.0 bar ±10%</td><td>DL A 70 x A 71 P01</td></tr><tr><td>9.5 bar ±10%</td><td>DL A 95 x A 71 P01</td></tr></table>  A/F 30 Max tightening torque: 65 N·m	Settings	Ordering code	1.2 bar ±10%	DL A 12 x A 71 P01	2.0 bar ±10%	DL A 20 x A 71 P01	5.0 bar ±10%	DL A 50 x A 71 P01	7.0 bar ±10%	DL A 70 x A 71 P01	9.5 bar ±10%	DL A 95 x A 71 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: Brass - Base: Black polyamide - Contacts: Silver - Seal: HNBR - FPM Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP65 according to EN 60529 IP69K according to ISO 20653 Electrical data - Electrical connection: IEC 61076-2-101 D (M12) - Lamps: 24 Vdc (black base) - Resistive load: 0.4 A / 24 Vdc
Settings	Ordering code													
1.2 bar ±10%	DL A 12 x A 71 P01													
2.0 bar ±10%	DL A 20 x A 71 P01													
5.0 bar ±10%	DL A 50 x A 71 P01													
7.0 bar ±10%	DL A 70 x A 71 P01													
9.5 bar ±10%	DL A 95 x A 71 P01													










DLE*A50		Hydraulic symbol	Materials
Electrical/Visual Differential Pressure Indicator Without term. Connections: EN 175301-803			
Settings	Ordering code		
1.2 bar $\pm 10\%$	DL E 12 x A 50 P01		Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP65 according to EN 60529
2.0 bar $\pm 10\%$	DL E 20 x A 50 P01		
5.0 bar $\pm 10\%$	DL E 50 x A 50 P01		
7.0 bar $\pm 10\%$	DL E 70 x A 50 P01		
9.5 bar $\pm 10\%$	DL E 95 x A 50 P01		
		Electrical data - Electrical connections: EN 175301-803 - Resistive load: 5 A / 250 Vac - Available the connector with lamps	







DLE*F50		Hydraulic symbol	Materials
Electrical/Visual Differential Pressure Indicator With term. Connections: EN 175301-803			
Settings	Ordering code		
1.2 bar $\pm 10\%$	DL E 12 x F 50 P01		Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP65 according to EN 60529
2.0 bar $\pm 10\%$	DL E 20 x F 50 P01		
5.0 bar $\pm 10\%$	DL E 50 x F 50 P01		
7.0 bar $\pm 10\%$	DL E 70 x F 50 P01		
9.5 bar $\pm 10\%$	DL E 95 x F 50 P01		
		Electrical data - Electrical connections: EN 175301-803 - Resistive load: 5 A / 250 Vac - Thermal lockout setting: +30 °C	

DLX*51 - DLX*52		Hydraulic symbol	Materials
Electrical/Visual Differential Pressure Indicator Connection: EN 175301-803			
Settings	Ordering code		
1.2 bar $\pm 10\%$	DL X 12 x A 5x P01		Technical data - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529 IP69K according to ISO 20653
2.0 bar $\pm 10\%$	DL X 20 x A 5x P01		
5.0 bar $\pm 10\%$	DL X 50 x A 5x P01		
7.0 bar $\pm 10\%$	DL X 70 x A 5x P01		
9.5 bar $\pm 10\%$	DL X 95 x A 5x P01		
		Electrical data - Electrical connection: EN 175301-803 - Type: 51 52 - Lamps: 24 Vdc 110 Vdc - Resistive load: 1 A / 24 Vdc 1 A / 110 Vdc	

DIFFERENTIAL PRESSURE INDICATORS







Dimensions





DLZ*51 - DLZ*52 Electrical/Visual Differential Pressure Indicator Connection: EN 175301-803 51: Transparent base with lamps 24 Vdc 52: Transparent base with lamps 110 Vdc <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DL Z 12 x A 5x P01</td></tr><tr><td>2.5 bar ±10%</td><td>DL Z 25 x A 5x P01</td></tr><tr><td>5.0 bar ±10%</td><td>DL Z 50 x A 5x P01</td></tr><tr><td>7.0 bar ±10%</td><td>DL Z 70 x A 5x P01</td></tr><tr><td>9.5 bar ±10%</td><td>DL Z 95 x A 5x P01</td></tr></table>  A/F 30 Max tightening torque: 110 N·m		Settings	Ordering code	1.2 bar ±10%	DL Z 12 x A 5x P01	2.5 bar ±10%	DL Z 25 x A 5x P01	5.0 bar ±10%	DL Z 50 x A 5x P01	7.0 bar ±10%	DL Z 70 x A 5x P01	9.5 bar ±10%	DL Z 95 x A 5x P01	Hydraulic symbol  Electrical symbol 	Materials - Body: - Base: - Contacts: - Seal: AISI 316L Transparent polyamide Silver HNBR - MFQ Technical data - Max working pressure: - Proof pressure: - Burst pressure: - Working temperature: - Compatibility with fluids: 700 bar 1050 bar 2100 bar From -25 °C to +110 °C Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP66 according to EN 60529 IP69K according to ISO 20653 Electrical data - Electrical connection: - Type - Lamps - Resistive load: EN 175301-803 51 52 24 Vdc 110 Vdc 1 A / 24 Vdc 1 A / 110 Vdc
Settings	Ordering code														
1.2 bar ±10%	DL Z 12 x A 5x P01														
2.5 bar ±10%	DL Z 25 x A 5x P01														
5.0 bar ±10%	DL Z 50 x A 5x P01														
7.0 bar ±10%	DL Z 70 x A 5x P01														
9.5 bar ±10%	DL Z 95 x A 5x P01														
DTA*F70 Electronic Differential Pressure Indicator Connection: IEC 61076-2-101 D (M12) <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DT A 12 x F 70 P01</td></tr><tr><td>2.0 bar ±10%</td><td>DT A 20 x F 70 P01</td></tr><tr><td>5.0 bar ±10%</td><td>DT A 50 x F 70 P01</td></tr><tr><td>7.0 bar ±10%</td><td>DT A 70 x F 70 P01</td></tr><tr><td>9.5 bar ±10%</td><td>DT A 95 x F 70 P01</td></tr></table>  A/F 30 Max tightening torque: 50 N·m		Settings	Ordering code	1.2 bar ±10%	DT A 12 x F 70 P01	2.0 bar ±10%	DT A 20 x F 70 P01	5.0 bar ±10%	DT A 50 x F 70 P01	7.0 bar ±10%	DT A 70 x F 70 P01	9.5 bar ±10%	DT A 95 x F 70 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: - Internal parts: - Contacts: - Seal: Brass Brass - Polyamide Silver HNBR - FPM Technical data - Max working pressure: - Proof pressure: - Burst pressure: - Compatibility with fluids: 420 bar 630 bar 1260 bar Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP67 according to EN 60529 Electrical data - Electrical connection: - Power supply: - Analogue output: - Thermal lockout: IEC 61076-2-101 D (M12) 24 Vdc From 4 to 20 mA 30 °C (all output signals stalled up to 30 °C)
Settings	Ordering code														
1.2 bar ±10%	DT A 12 x F 70 P01														
2.0 bar ±10%	DT A 20 x F 70 P01														
5.0 bar ±10%	DT A 50 x F 70 P01														
7.0 bar ±10%	DT A 70 x F 70 P01														
9.5 bar ±10%	DT A 95 x F 70 P01														
DTI*70 IO-Link Electronic Differential Pressure Indicator Connection: IEC 61076-2-101 D (M12) <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DT I 12 x A 70 P01</td></tr><tr><td>2.0 bar ±10%</td><td>DT I 20 x A 70 P01</td></tr><tr><td>5.0 bar ±10%</td><td>DT I 50 x A 70 P01</td></tr><tr><td>7.0 bar ±10%</td><td>DT I 70 x A 70 P01</td></tr><tr><td>9.5 bar ±10%</td><td>DT I 95 x A 70 P01</td></tr></table>  A/F 30 Max tightening torque: 50 N·m		Settings	Ordering code	1.2 bar ±10%	DT I 12 x A 70 P01	2.0 bar ±10%	DT I 20 x A 70 P01	5.0 bar ±10%	DT I 50 x A 70 P01	7.0 bar ±10%	DT I 70 x A 70 P01	9.5 bar ±10%	DT I 95 x A 70 P01	Hydraulic symbol  Electrical symbol 	Materials - Body: - Internal parts: - Contacts: - Seal: Brass Brass - Polyamide Silver HNBR - FPM Technical data - Max working pressure: - Proof pressure: - Burst pressure: - Compatibility with fluids: 420 bar 630 bar 1260 bar Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP67 according to EN 60529 Electrical data - Electrical connection: - Power supply: IEC 61076-2-101 D (M12) 24 Vdc IO-Link data - Differential pressure [bar]: - Temperature [°C]: - State register: - Errors register: Float 32/4 byte Float 32/4 byte Unit 16/2 byte Unit 16/2 byte
Settings	Ordering code														
1.2 bar ±10%	DT I 12 x A 70 P01														
2.0 bar ±10%	DT I 20 x A 70 P01														
5.0 bar ±10%	DT I 50 x A 70 P01														
7.0 bar ±10%	DT I 70 x A 70 P01														
9.5 bar ±10%	DT I 95 x A 70 P01														

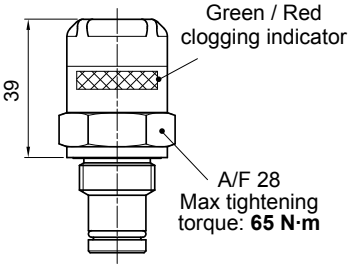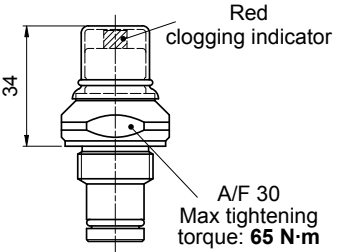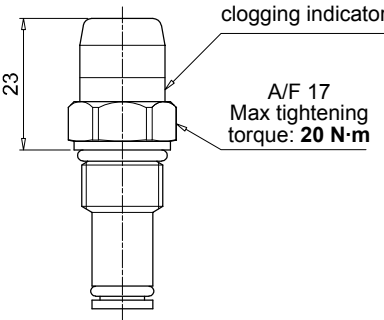DVA Visual Differential Pressure Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DVA 12 x P01</td></tr><tr><td>2.0 bar ±10%</td><td>DVA 20 x P01</td></tr><tr><td>5.0 bar ±10%</td><td>DVA 50 x P01</td></tr><tr><td>7.0 bar ±10%</td><td>DVA 70 x P01</td></tr><tr><td>9.5 bar ±10%</td><td>DVA 95 x P01</td></tr></table>  Green / Red clogging indicator A/F 28 Max tightening torque: 65 N·m 39	Settings	Ordering code	1.2 bar ±10%	DVA 12 x P01	2.0 bar ±10%	DVA 20 x P01	5.0 bar ±10%	DVA 50 x P01	7.0 bar ±10%	DVA 70 x P01	9.5 bar ±10%	DVA 95 x P01	Hydraulic symbol 	Materials - Body: Brass - Internal parts: Brass - Polyamide - Seal: HNBR - FPM Technical data - Reset: Automatic reset - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP65 according to EN 60529
Settings	Ordering code													
1.2 bar ±10%	DVA 12 x P01													
2.0 bar ±10%	DVA 20 x P01													
5.0 bar ±10%	DVA 50 x P01													
7.0 bar ±10%	DVA 70 x P01													
9.5 bar ±10%	DVA 95 x P01													
DVM Visual Differential Pressure Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DVM 12 x P01</td></tr><tr><td>2.0 bar ±10%</td><td>DVM 20 x P01</td></tr><tr><td>5.0 bar ±10%</td><td>DVM 50 x P01</td></tr><tr><td>7.0 bar ±10%</td><td>DVM 70 x P01</td></tr><tr><td>9.5 bar ±10%</td><td>DVM 95 x P01</td></tr></table>  Red clogging indicator A/F 30 Max tightening torque: 65 N·m 34	Settings	Ordering code	1.2 bar ±10%	DVM 12 x P01	2.0 bar ±10%	DVM 20 x P01	5.0 bar ±10%	DVM 50 x P01	7.0 bar ±10%	DVM 70 x P01	9.5 bar ±10%	DVM 95 x P01	Hydraulic symbol 	Materials - Body: Brass - Internal parts: Brass - Polyamide - Seal: HNBR - FPM Technical data - Reset: Manual reset - Max working pressure: 420 bar - Proof pressure: 630 bar - Burst pressure: 1260 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP65 according to EN 60529
Settings	Ordering code													
1.2 bar ±10%	DVM 12 x P01													
2.0 bar ±10%	DVM 20 x P01													
5.0 bar ±10%	DVM 50 x P01													
7.0 bar ±10%	DVM 70 x P01													
9.5 bar ±10%	DVM 95 x P01													
DVS Visual Differential Pressure Indicator Connection: EN 175301-803 <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DVS 12 H P01</td></tr><tr><td>2.5 bar ±10%</td><td>DVS 25 H P01</td></tr><tr><td>4.0 bar ±10%</td><td>DVS 40 H P01</td></tr></table>  Clear / Red clogging indicator A/F 17 Max tightening torque: 20 N·m 23	Settings	Ordering code	1.2 bar ±10%	DVS 12 H P01	2.5 bar ±10%	DVS 25 H P01	4.0 bar ±10%	DVS 40 H P01	Hydraulic symbol 	Materials - Body: Brass - Internal parts: Brass - Polyamide - Seal: HNBR Technical data - Reset: Automatic reset - Max working pressure: 35 bar - Proof pressure: 53 bar - Burst pressure: 105 bar - Working temperature: From -25 °C to +110 °C - Compatibility with fluids: Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 - Degree protection: IP67 according to EN 60529				
Settings	Ordering code													
1.2 bar ±10%	DVS 12 H P01													
2.5 bar ±10%	DVS 25 H P01													
4.0 bar ±10%	DVS 40 H P01													

DIFFERENTIAL PRESSURE INDICATORS

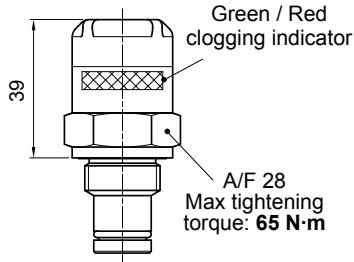Dimensions

DVX Visual Differential Pressure Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DV X 12 x P01</td></tr><tr><td>2.0 bar ±10%</td><td>DV X 20 x P01</td></tr><tr><td>5.0 bar ±10%</td><td>DV X 50 x P01</td></tr><tr><td>7.0 bar ±10%</td><td>DV X 70 x P01</td></tr><tr><td>9.5 bar ±10%</td><td>DV X 95 x P01</td></tr></table>  Green / Red clogging indicator A/F 28 Max tightening torque: 65 N·m	Settings	Ordering code	1.2 bar ±10%	DV X 12 x P01	2.0 bar ±10%	DV X 20 x P01	5.0 bar ±10%	DV X 50 x P01	7.0 bar ±10%	DV X 70 x P01	9.5 bar ±10%	DV X 95 x P01	Hydraulic symbol 	Materials - Body: - Internal parts: - Seal: AISI 316L AISI 316L - Polyamide HNBR - MFQ Technical data - Reset: - Max working pressure: - Proof pressure: - Burst pressure: - Working temperature: - Compatibility with fluids: - Degree protection: Automatic reset 420 bar 630 bar 1260 bar From -25 °C to +110 °C Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 IP65 according to EN 60529
Settings	Ordering code													
1.2 bar ±10%	DV X 12 x P01													
2.0 bar ±10%	DV X 20 x P01													
5.0 bar ±10%	DV X 50 x P01													
7.0 bar ±10%	DV X 70 x P01													
9.5 bar ±10%	DV X 95 x P01													
DVY Visual Differential Pressure Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DV Y 12 x P01</td></tr><tr><td>2.0 bar ±10%</td><td>DV Y 20 x P01</td></tr><tr><td>5.0 bar ±10%</td><td>DV Y 50 x P01</td></tr><tr><td>7.0 bar ±10%</td><td>DV Y 70 x P01</td></tr><tr><td>9.5 bar ±10%</td><td>DV Y 95 x P01</td></tr></table>  Red clogging indicator A/F 30 Max tightening torque: 65 N·m	Settings	Ordering code	1.2 bar ±10%	DV Y 12 x P01	2.0 bar ±10%	DV Y 20 x P01	5.0 bar ±10%	DV Y 50 x P01	7.0 bar ±10%	DV Y 70 x P01	9.5 bar ±10%	DV Y 95 x P01	Hydraulic symbol 	Materials - Body: - Internal parts: - Seal: AISI 316L AISI 316L - Polyamide HNBR - MFQ Technical data - Reset: - Max working pressure: - Proof pressure: - Burst pressure: - Working temperature: - Compatibility with fluids: - Degree protection: Manual reset 420 bar 630 bar 1260 bar From -25 °C to +110 °C Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 IP65 according to EN 60529
Settings	Ordering code													
1.2 bar ±10%	DV Y 12 x P01													
2.0 bar ±10%	DV Y 20 x P01													
5.0 bar ±10%	DV Y 50 x P01													
7.0 bar ±10%	DV Y 70 x P01													
9.5 bar ±10%	DV Y 95 x P01													
DVZ Visual Differential Pressure Indicator <table><tr><th>Settings</th><th>Ordering code</th></tr><tr><td>1.2 bar ±10%</td><td>DV Z 12 x P01</td></tr><tr><td>2.5 bar ±10%</td><td>DV Z 25 x P01</td></tr><tr><td>5.0 bar ±10%</td><td>DV Z 50 x P01</td></tr><tr><td>7.0 bar ±10%</td><td>DV Z 70 x P01</td></tr><tr><td>9.5 bar ±10%</td><td>DV Z 95 x P01</td></tr></table>  Green / Red clogging indicator A/F 30 Max tightening torque: 110 N·m	Settings	Ordering code	1.2 bar ±10%	DV Z 12 x P01	2.5 bar ±10%	DV Z 25 x P01	5.0 bar ±10%	DV Z 50 x P01	7.0 bar ±10%	DV Z 70 x P01	9.5 bar ±10%	DV Z 95 x P01	Hydraulic symbol 	Materials - Body: - Internal parts: - Seal: AISI 316L AISI 316L - Polyamide HNBR - MFQ Technical data - Reset: - Max working pressure: - Proof pressure: - Burst pressure: - Working temperature: - Compatibility with fluids: - Degree protection: Automatic reset 700 bar 1050 bar 2100 bar From -25 °C to +110 °C Mineral oils, Synthetic fluids HFB and HFC according to ISO 2943 IP65 according to EN 60529
Settings	Ordering code													
1.2 bar ±10%	DV Z 12 x P01													
2.5 bar ±10%	DV Z 25 x P01													
5.0 bar ±10%	DV Z 50 x P01													
7.0 bar ±10%	DV Z 70 x P01													
9.5 bar ±10%	DV Z 95 x P01													

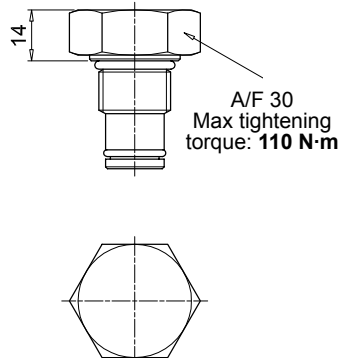T2 Plug <table><tr><th>Seal</th><th>Ordering code</th></tr><tr><td>HNBR</td><td>T2 H</td></tr><tr><td>FPM</td><td>T2 V</td></tr></table> 	Seal	Ordering code	HNBR	T2 H	FPM	T2 V	Materials - Body: Phosphatized steel - Seal: HNBR / FPM	T4 Plug <table><tr><th>Seal</th><th>Ordering code</th></tr><tr><td>NBR</td><td>T4 A</td></tr></table> 	Seal	Ordering code	NBR	T4 A	Materials - Body: Anodized aluminium - Seal: NBR						
Seal	Ordering code																		
HNBR	T2 H																		
FPM	T2 V																		
Seal	Ordering code																		
NBR	T4 A																		
X2 Stainless Steel plug 420 bar <table><tr><th>Seal</th><th>Ordering code</th></tr><tr><td>HNBR</td><td>X2 H</td></tr><tr><td>FPM</td><td>X2 V</td></tr><tr><td>MFQ</td><td>X2 F</td></tr></table> 	Seal	Ordering code	HNBR	X2 H	FPM	X2 V	MFQ	X2 F	Materials - Body: AISI 316L - Seal: HNBR / FPM / MFQ	X3 Stainless Steel plug 700 bar (only for FZH) <table><tr><th>Seal</th><th>Ordering code</th></tr><tr><td>HNBR</td><td>X3 H</td></tr><tr><td>FPM</td><td>X3 V</td></tr><tr><td>MFQ</td><td>X3 F</td></tr></table> 	Seal	Ordering code	HNBR	X3 H	FPM	X3 V	MFQ	X3 F	Materials - Body: AISI 316L - Seal: HNBR / FPM / MFQ
Seal	Ordering code																		
HNBR	X2 H																		
FPM	X2 V																		
MFQ	X2 F																		
Seal	Ordering code																		
HNBR	X3 H																		
FPM	X3 V																		
MFQ	X3 F																		

All data, details and words contained in this publication are provided for use by technically qualified personnel at their discretion, without warranty of any kind.
MP Filtri reserves the right to make modifications to the models and versions of the described products at any time for both technical and/or commercial reasons.
For updated information please visit our website: www.mpfiltri.com
The colors and the pictures of the products are purely indicative.
Any reproduction, partial or total, of this document is strictly forbidden.
All rights are strictly reserved

WORLDWIDE NETWORK

CANADA ♦ CHINA ♦ FRANCE ♦ GERMANY ♦ INDIA ♦ SINGAPORE
UNITED ARAB EMIRATES ♦ UNITED KINGDOM ♦ USA



PASSION T PERFORM

in @ y f



mpfiltri.com
Scan or click me!

MP Filtri reserves the right to make modifications to the models and versions of the described products at any time for both technical and/or commercial reasons.
For updated information please visit our website: www.mpfiltri.com. The colors and the pictures of the products are purely indicative.
Any reproduction, partial or total, of this document is strictly forbidden. All rights are strictly reserved.

MF001000017
EN - 2026.04