

FTA -FTR series

Oil tank fixing flange



FTA - FTR GENERAL INFORMATION

Technical data

Accessories

Oil tank fixing flange

FT flanges make it possible to fix suction and return lines on the reservoir cover.

Fitting a flexible insert allows separation of pipes.

Both rigid pipes and flexible hoses can be separated from the reservoir walls, absorbing vibration and reducing plant noise emissions.

Operating temperature

From -25 °C to + 100 °C

Materials

- Flange: Galvanized steel
- Flange seal: Inorganic fibre
- Tube seal: NBR
- Screw: Galvanized steel

Weight FTA

FTA 1215	0.590 kg
FTA 1620	0.570 kg
FTA 2225	0.550 kg
FTA 2630	0.530 kg
FTA 3235	0.500 kg
FTA 3842	0.520 kg
FTA 4850	0.920 kg
FTA 6061	0.900 kg
FTA 7577	0.860 kg
FTA 8789	0.830 kg

Weight FTR

FTR 0610	0.450 kg
FTR 1215	0.430 kg
FTR 1620	0.400 kg
FTR 2225	0.100 kg
FTR 2630	0.103 kg
FTR 3235	0.980 kg
FTR 3842	0.950 kg
FTR 4850	0.900 kg
FTR 6061	0.850 kg




Designation & Ordering code

COMPLETE OIL TANK FIXING FLANGE


Series			Configuration example :				
FTA			FTA	2630	G	A	P01
FTR							
Size		FTA	FTR				
0610	Pipe Ø06 ÷ 10 mm	-	•				
1215	Pipe Ø12 ÷ 15 mm	•	•				
1620	Pipe Ø16 ÷ 20 mm	•	•				
2225	Pipe Ø22 ÷ 25 mm	•	•				
2630	Pipe Ø26 ÷ 30 mm	•	•				
3235	Pipe Ø32 ÷ 35 mm	•	•				
3842	Pipe Ø38 ÷ 42 mm	•	•				
4850	Pipe Ø48 ÷ 50 mm	•	•				
6061	Pipe Ø60 ÷ 61 mm	•	•				
7577	Pipe Ø75 ÷ 77 mm	•	-				
8789	Pipe Ø87 ÷ 89 mm	•	-				
Flange seals			FTA	FTR			
G	Inorganic fiber	•	-				
O	Without seal	-	•				
Pipe seals							
A	NBR						
Execution							
P01	MP Filtri standard						
Pxx	Customized						

FTA

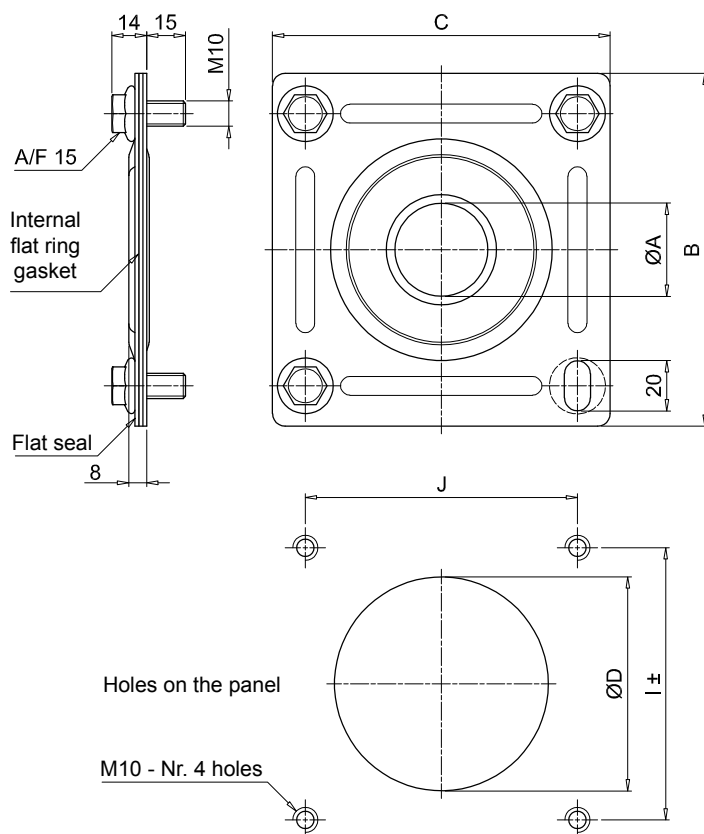

Size	ØA [mm]		B [mm]	C [mm]	ØD [mm]	I [mm]	J [mm]
	min	max					
1215	12	15	140	134	85	108±1	108
1620	16	20					
2225	22	25					
2630	26	30					
3235	32	35					
3842	38	42	190	184	130	159±4	159
4850	48	50					
6061	60	61					
7577	75	77					
8789	87	89					

FTR

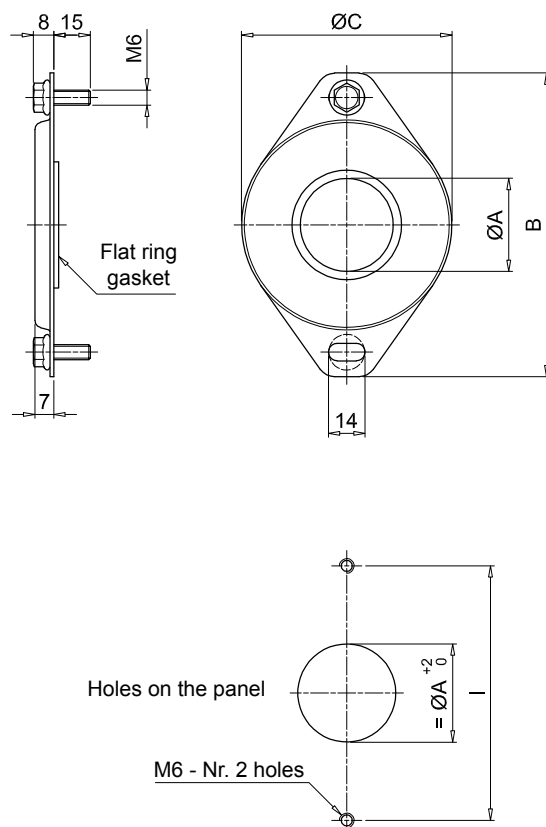

Size	ØA [mm]		B [mm]	ØC [mm]	I [mm]
	min	max			
0610	6	10	71	40	55
1215	12	15			
1620	16	20			
2225	22	25			
2630	26	30			
3235	32	35	121	84	101
3842	38	42			
4850	48	50			
6061	60	61			