

LPH 630 series

Maximum working pressure up to 1 MPa (10 bar) Flow rate up to 1600 l/min



LPH 630 GENERAL INFORMATION

Description

Low & Medium Pressure filters

Maximum working pressure up to 1 MPa (10 bar)
Flow rate up to 1600 l/min

LPH630 is a high capacity low pressure filter with large filtration surface particularly suitable for industrial applications and off-line filtration of the lubrication system reservoirs.

Available features:

- 2 1/2" flanged connection connections, for a maximum flow rate of 1600 l/min
- Versatile orientation of the connections, to suite a variety of hydraulic systems
- Fine filtration rating, to get a good cleanliness level into the system
- Water removal elements, to remove the free water from the hydraulic fluid.
- Bypass valve, to relieve excessive pressure drop across the filter media
- Magnetic filter, to hold the ferrous particles
- Visual, electrical and electronic differential clogging indicators.

Common applications:

- Lubrication
- Off-line filtration of reservoirs
- Filtration systems

Technical data

Filter housing materials

- Head & Cover: Anodized Aluminium
- Bypass valve: Phosphatized steel
- Bowl: Phosphatized steel

Bypass valve

Opening pressure 175 kPa (1.75 bar) $\pm 10\%$
Opening pressure 250 kPa (2.5 bar) $\pm 10\%$

Δp element type

- Microfibre filter elements - series MR: 10 bar
- Fluid flow through the filter element from IN to OUT

Seals

Standard NBR series A
Optional FPM series V

Temperature

From -25 °C to +110 °C

Note

LPH filters are provided
for vertical mounting

Weights [kg] and volumes [dm³]

Filter series	Weights [kg]	Volumes [dm ³]
	Length 7	Length 7
LPH 630	1.50	0.60

Flow rates [l/min]



Filter series	Length	Filter element design - N Series							
		A03	A06	A10	A16	A25	M25 M60 M90	P10	P25
LPH 630	7	633	671	1091	1130	1217	1669	1518	1602

Maximum flow rate for a complete delivery filter with a pressure drop $\Delta p = 0.7$ bar.


The reference fluid has a kinematic viscosity of 30 mm²/s (cSt) and a density of 0.86 kg/dm³.

For different pressure drop or fluid viscosity we recommend to use our selection software available on www.mpfiltri.com.

Please, contact our Sales Department for further additional information.


Filter series	Style S	Style C-E
LPH 630		

Hydraulic symbols

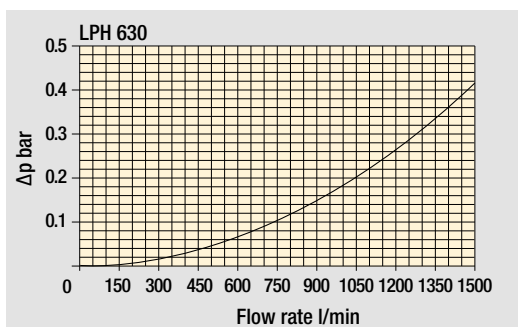

Pressure drop

Filter housings
Δp pressure drop

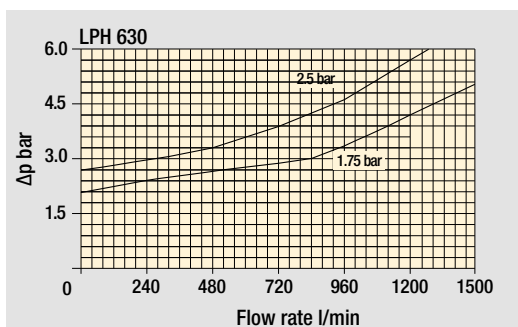

Bypass valve
pressure drop

The curves are plotted using mineral oil with density of 0.86 kg/dm³ in compliance with ISO 3968. Δp varies proportionally with density.

LPH 630

Designation & Ordering code

COMPLETE FILTER

Series and size	Configuration example: LPH630 7 C E 1 1 A F1 A10 P01										
LPH630											
Length	7										
Bypass valve	S Without bypass										
C With bypass 1.75 bar											
E With bypass 2.5 bar											
Diffuser and magnetic filter	O With magnetic filter										
E Without magnetic filter											
Port IN position	1 On the left of the bracket										
Port OUT position	1 On the left of the bracket										
Seals and treatments	A NBR										
V FPM											
Connection	F1 2 1/2" SAE 3000 psi/M										
F3 2 1/2" SAE 3000 psi/UNC											
Filtration rating (filter media)											
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm										
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm										
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm										
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm										
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm										
WA025 Water absorber inorganic microfiber 25 µm											
Execution											
P01 MP Filtri standard											
Pxx Customized											

FILTER ELEMENT

Element series and size	Configuration example: MR630 7 M25 A P01				
MR630					
Element length	7				
Filtration rating (filter media)					
A03 Inorganic microfiber 3 µm	M25 Wire mesh 25 µm				
A06 Inorganic microfiber 6 µm	M60 Wire mesh 60 µm				
A10 Inorganic microfiber 10 µm	M90 Wire mesh 90 µm				
A16 Inorganic microfiber 16 µm	P10 Resin impregnated paper 10 µm				
A25 Inorganic microfiber 25 µm	P25 Resin impregnated paper 25 µm				
WA025 Water absorber inorganic microfiber 25 µm					
Seals and treatments					
A NBR					
V FPM					
Execution					
P01 MP Filtri standard					
Pxx Customized					

CLOGGING INDICATORS

See page 726


DEA Electrical differential pressure indicator	DLE Electrical / visual differential pressure indicator
DEM Electrical differential pressure indicator	DTA Electronic differential pressure indicator
DEU Electrical differential pressure indicator	DVA Visual differential pressure indicator
DLA Electrical / visual differential pressure indicator	DVM Visual differential pressure indicator

PLUGS

See page 747

T2 Plug


LPH630

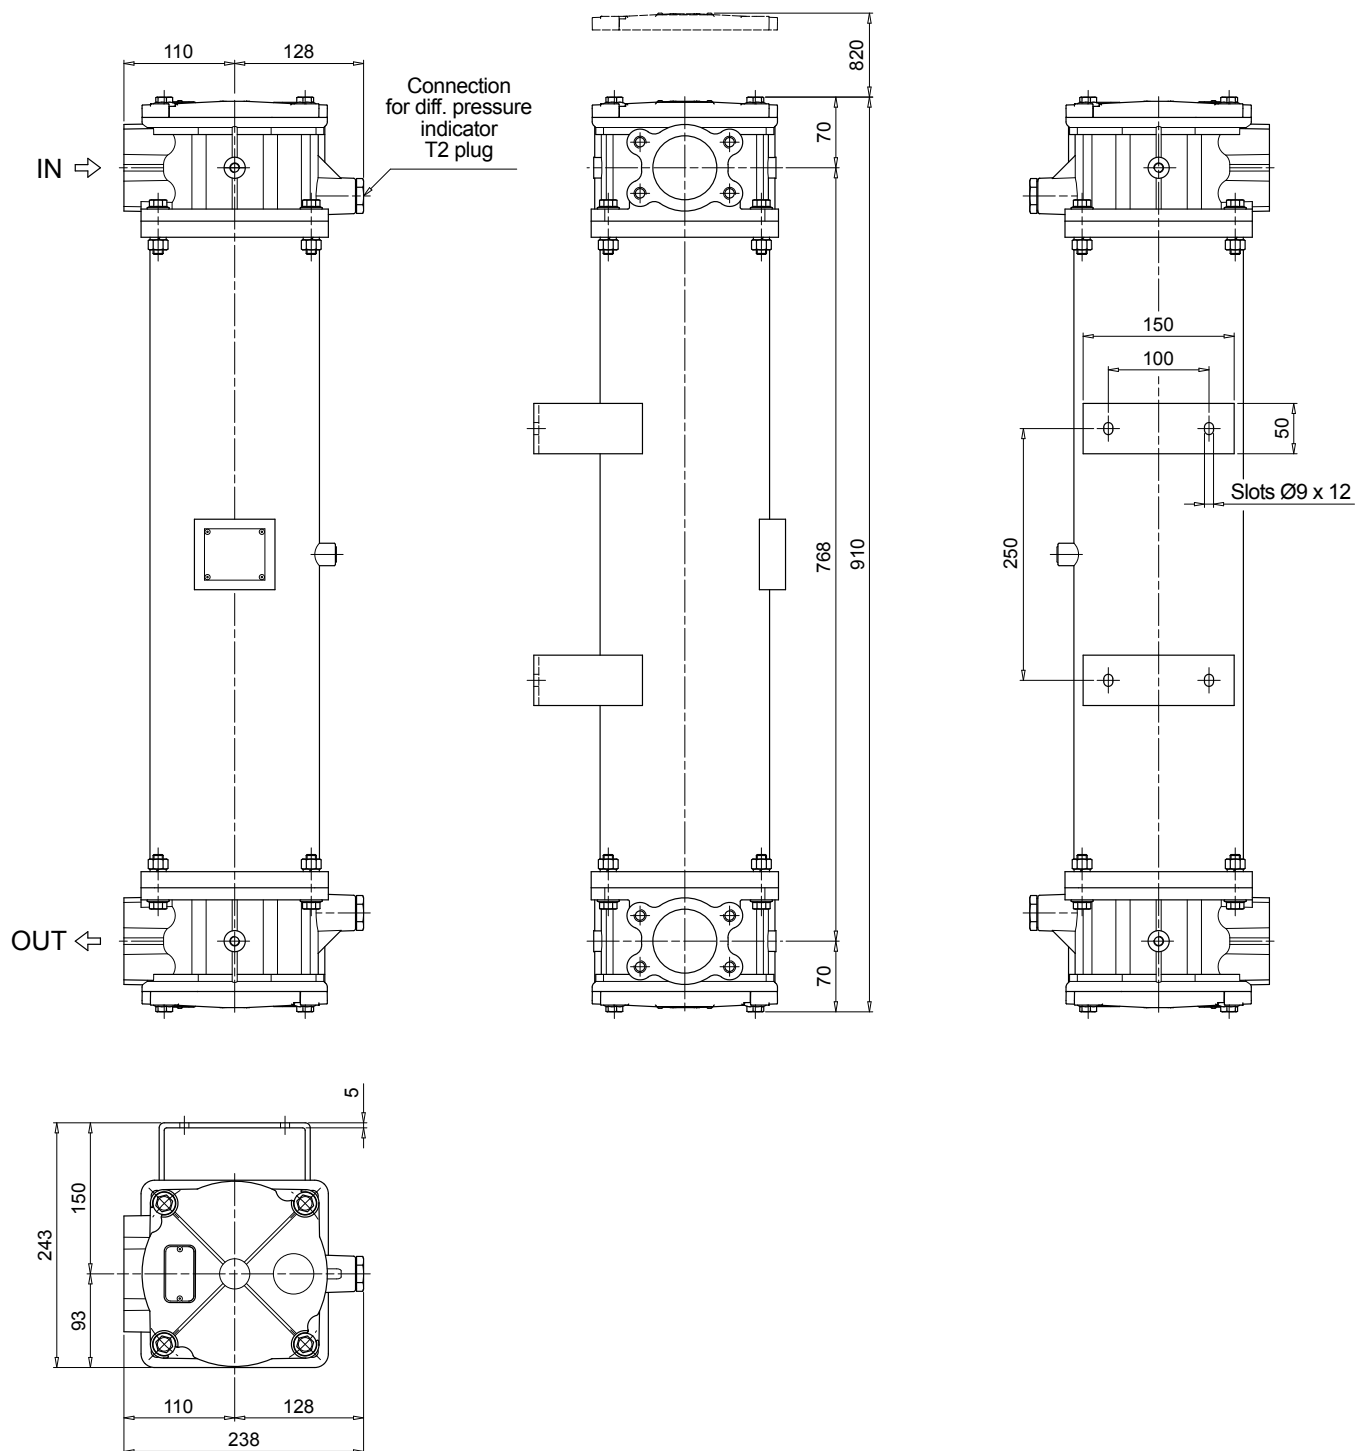

LPH 630

Order number for spare parts

LPH 630

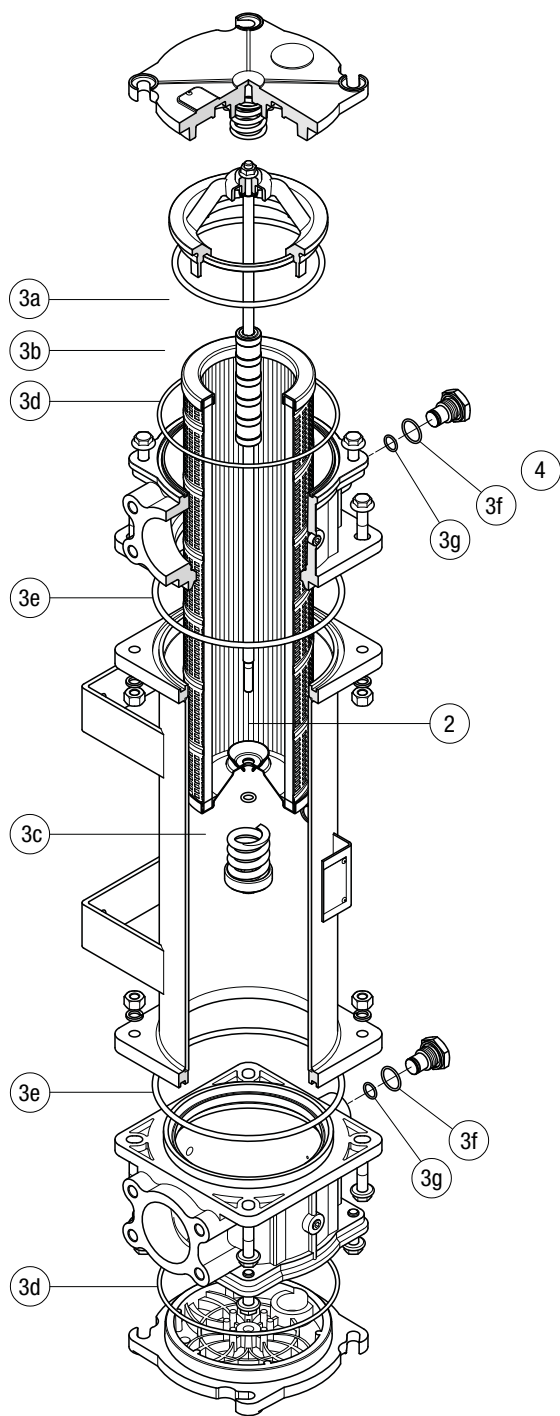

Q.ty: 1 pc.		Q.ty: 1 pc.		Q.ty: 2 pc.	
Item:	2	3 (3a ÷ 3g)		4	
Filter series	Filter element	Seal Kit code number		Indicator connection plug	
		NBR	FPM	NBR	FPM
LPH 630	See order table	02050640	02050641	T2H	T2V

CLOGGING INDICATORS LOW & MEDIUM PRESS. FILTERS

Designation & Ordering code

DIFFERENTIAL PRESSURE INDICATORS

Series											Configuration example 1:	
DE Electrical differential pressure indicator											DE	M
DL Electrical/Visual differential pressure indicator											20	H
DT Electronic differential pressure indicator											F	50
DV Visual differential pressure indicator											P01	
Type											Configuration example 2:	
A Standard type											DE	U
M With wired electrical connection											50	V
U Standard type 210 bar, UL certified											A	50
E For high power supply											P01	
S Compact version											UL	
Pressure setting											Configuration example 3:	
12 1.2 bar											DL	E
20 2.0 bar											50	V
25 2.5 bar											A	71
40 4.0 bar											P01	
50 5.0 bar											DT	A
Seals											Configuration example 4:	
H HNBR											20	H
V FPM											F	70
Thermostat											Configuration example 5:	
A Without thermostat											DV	M
F With thermostat											50	V
Electrical connections												
10 Connection AMP Superseal series 1.5												
20 Connection AMP Timer Junior												
30 Connection Deutsch DT-04-2-P												
35 Connection Deutsch DT-04-3-P												
50 Connection EN 175301-803												
51 Connection EN 175301-803, transparent base with lamps 24 Vdc												
52 Connection EN 175301-803, transparent base with lamps 110 Vdc												
70 Connection IEC 61076-2-101 D (M12)												
71 Connection IEC 61076-2-101 D (M12), black base with lamps 24 Vdc												
80 Connection Stud #10-32 UNF												
Option												
P01 MP Filtri standard												
Pxx Customized												
Certifications												
Without												
UL UL certification												

PLUGS

Series			Configuration example	
T2 Plug			T2	H
T4 Plug				
Seals				
A NBR				
H HNBR				
V FPM				